



# LAFAYETTE RADIO

## Sensational Winter Breakthrough!


**N  
E  
W**

### LAFAYETTE HE-15 CITIZENS BAND 11 METER 2-WAY SUPERHETERODYNE TRANSCEIVER



MADE IN U.S.A.

COMPLETE TWO-WAY COMMUNICATION FOR HOME, BUSINESS, FARM AND BOAT

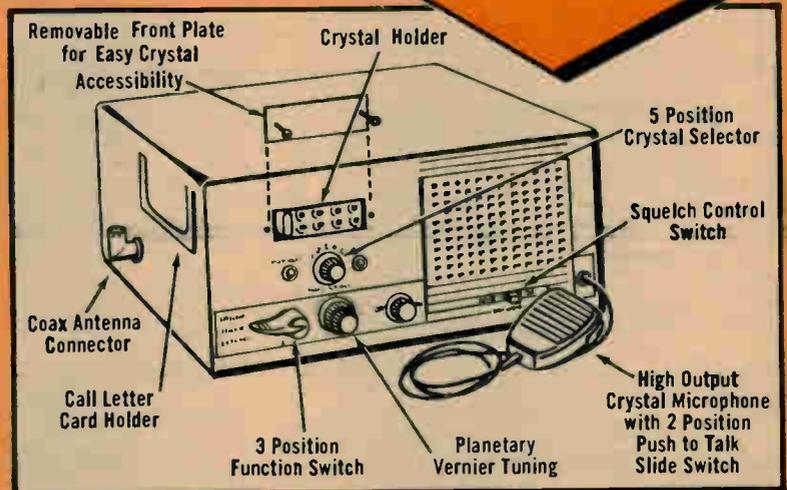

COMPLETELY WIRED

NOT A KIT ONLY 5.00 DOWN

**59.95**

#### Unequaled Performance & Design . . . The Greatest Value In The Citizens Band Field!

Just think . . . now you can have economical, efficient 2-way radio telephone communication from your home, office, store, auto, truck or boat . . . literally hundreds of uses. The Lafayette HE-15 Superheterodyne Transceiver is both a compact precision transmitter and receiver designed to operate on the new 11 meter "Citizens Band." Two or more of these units will furnish you with your own communications system with coverage of a 20 mile or more radius depending on antenna height and terrain.

The Lafayette HE-15 meets all FCC requirements and operates in much the same manner as police and other short wave communications systems. The Transceiver features 5 crystal controlled transmitting channels operating at a maximum legal power input of 5 watts fully modulated RF stage in both transmitter and receiver. Any one of 5 transmitting frequencies may be instantly selected by the 5 position crystal selector on the front panel. These 5 crystals are readily accessible by means of a removable front plate and these may be easily interchanged with any 5 crystals of the remaining 22 allocated citizens band frequencies. The Superheterodyne receiver is tuneable over the full 22 channel band with 3 watts audio output and AVC. Controls include a 3 position function switch (transmit, receive, and transmit with spring return), planetary vernier tuning plus squelch noise limiter control switch. All coils are ferrite tuned. Output impedance matches 52 and 72 ohm antenna with Amphenol type coax connector for operating into dipole, ground plane or rod antenna. Has large 4" PM speaker; input jack for crystal or ceramic microphone; power receptacle in rear for AC line and 6 or 12 volt external power supply. Transceiver is supplied with single transmitting crystal for channel 9. Complete with high output crystal microphone, and brackets for easy mounting of unit in auto, boat, etc. Operates on 115 volts AC. Addition of 6 or 12 volt power supply (separately supplied) adapts transceiver for mobile operation. Size 10 1/4" W x 5 1/2" H x 6 3/8" D. Tube complement: 2-6U8A, 6EA8, 1-6AL5, 1-6V6, 1-12AX7, 1-6AU6. Shpg. wt., 11 lbs.

HE-15 . . . . . 5.00 Down . . . . . Net 59.95

POWER SUPPLY: Adapts HE-15 for mobile operation. Complete with cable, 6 or 12 volt vibrator and mounting flanges. Completely enclosed. Size 4 1/4" D x 6" W x 4" H. Shpg. wt., 4 lbs.

HE-16 For 12 volts . . . . . Net 9.95

HE-18 For 6 volts . . . . . Net 9.95

ANTENNA: Base loaded telescoping whip antenna with PL259 coax connector. Mounts directly on rear of cabinet. Ideal for indoor use and for shorter ranges. Extends to 45" and telescopes to only 15". Shpg. wt., 2 lbs.


HE-17 . . . . . Net 6.95

TRANSMITTING CRYSTALS: For any of the 22 channels. Specify channel or frequency. HE-830 . . . . . Singly Net 2.95 4 for 10.95

#### Not Superregenerative but SUPERHET!

CITIZENS BAND - The New Two-Way Personal Communications Method For Everyone - Fill out the FCC form enclosed with each Lafayette Transceiver. No examination or technical knowledge required - Any citizen 18 years or older is eligible for a license.

- 5 Crystal Controlled Transmitting Positions
- Superheterodyne Tuneable Receiver Over Full 22 Channel Band
- 4 Dual Function Tubes, plus 2 Single Function Tubes, plus 2 Rectifiers for 12 Tube Performance
- Planetary Vernier Tuning
- Complete with Transmitting Crystal for 27.065MC
- Meets All FCC Regulations
- Unexcelled Reception on Land and Sea . . . Compares with Units Costing 3 Times As Much

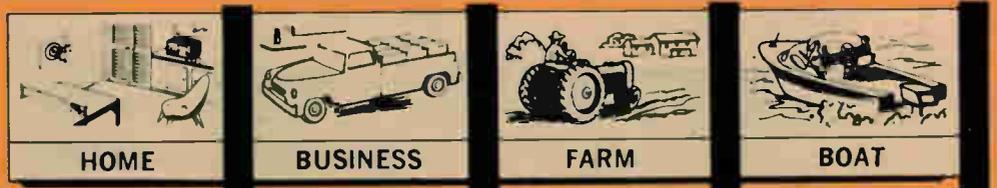

**165-08 LIBERTY AVE.  
JAMAICA 33, N. Y.  
AXtel 1-7000  
OPEN MON. AND FRI.  
TILL 8:45 P.M.**

CATALOG

**6  
0  
3**

NEW YORK 13, N.Y.  
100 6th Ave.  
Worth 6-5300  
Open THUR.  
'til 8:45 P.M.

BOSTON 10, Mass.  
110 Federal St.  
Hubbard 2-7850  
Open MON.-WED.  
'til 8:45 P.M.

BRONX 58, N.Y.  
542 E. Fordham Rd.  
Fordham 7-8813  
Open THUR.  
'til 8:45 P.M.

NEWARK 2, N. J.  
24 Central Ave.  
Market 2-1661  
Open WED.  
'til 8:45 P.M.

PLAINFIELD, N.J.  
139 W. 2nd St.  
Plainfield 6-4718  
Open THUR.  
'til 8:45 P.M.

Scott



**NEW SCOTT 299**

**COMPLETE STEREO AMPLIFIER**

Features dual 20 watt amplifiers and dual preamplifiers on one chassis. Includes a 3rd channel output for the ultimate in stereo reproduction. Has separate Bass and Treble controls for each channel; low level stereo cartridge inputs for cartridges with exceptionally low outputs; Balance Control for precisely balancing both channels; Master Volume Control with loudness switch for tonal balance; Phase Reversal Switch: corrects reversed phasing on improperly made recordings; Master Function Selector switches to: stereo records low-level or hi-level cartridges, stereo FM/AM broadcasts, use of stereo cartridge for monaural records, for a monaural source through both amplifiers. Unit is also used as a monaural electric crossover. Inputs: 2 low-level, 2 high channel. Outputs: Tape recorder output, center channel output, and speaker impedance of 4, 8, and 16 ohms/ for each channel. Freq. Response: 20-30,000 cps. Power output per section 20 watts, 40 watts peak; Harmonic Distortion: 0.8% 1M 0.3%. 11 tubes Size: 4 1/2" x 15" x 12". Shpg. wt., 35 lbs.

- G-135WX 299—Less Case ... 5.00 Down ... Net 209.95
- G-147W C Steel Case ... Net 12.95
- G-149W CW Mahogany Case ... Net 24.95
- G-151W CWB Blonde Case ... Net 24.95
- G-150W CWW Walnut Case ... Net 24.95

**NEW SCOTT 222**

**24 WATT STEREO AMPLIFIER**



This is a new 24 watt Stereo Amplifier (12 watts per channel) with numerous features found only on more expensive amplifiers. Dual preamps and control facilities provide complete flexibility in the control and reproduction of all stereo or monaural sources. Outputs are available for stereo tape recording plus a third channel output for connection to another amplifier to provide the ultimate in stereo realism. Loudspeaker output impedances are 4, 8 and 16 ohms for each channel. Inputs: 4 dual (3 high level, 1 low level) Mag High, Mag Low, Tuner, Tape Playback. Outputs: Tape Out (dual) Center Channel (single). Specifications: Frequency response; 20 to 20,000 cps; Harmonic Distortion; less than 0.8% at 12 watts output; IM 0.3% (CCIF method); all aluminum chassis and DC on preamplifier tube heaters result in a hum level of 80 db below full output; Phono sensitivity 3 mv for full output; Size: 13 1/2" wide x 5" high x 9 1/2" deep. Shpg. wt., 24 lbs.

- G-137WX 222—Less Case ... 5.00 Down ... Net 144.95
- G-147W C Steel Case ... Net 12.95

**PILOT 240 STEREO PREAMP-AMPLIFIER**



The 30-watt stereophonic preamp-amplifier that represents the best value in its class. Four independent tone controls. 3 pairs of high level inputs for permanent simultaneous connection of FM-AM tuner, Multiplex adapter and tape recorder. 2 pairs of low level inputs for permanent connection of record changer and turntable. Direct tone playback facilities. Terminals for extension speakers, with front panel speaker selector switch. Electronic crossover for monophonic bi-amplifier use. Automatic shut-off. Mono position on Mode switch automatically cancels out undesired vertical stereo response when playing monophonic records. Eleven front panel controls. Specifications—Power outputs: 30 watts total; 15 watts per channel, music power. Sensitivity for full output phono; 3 mv; FM-AM multiplex, tape recorder, 110 mv. Harmonic distortion 1%. Hum and noise 80 db below full output. Frequency response  $\pm 1$  db, 20 to 20,000 cycles. Size: 5 1/2" high x 14 1/2" wide x 10 1/2" deep. Shpg. wt., 23 lbs. Complete with enclosure.

- G-386WX 12.95 Down ... Net 129.50


**NEW BOGEN DB230A 60-WATT STEREO AMPLIFIER**

- SEPARATE BASS AND TREBLE FOR EACH CHANNEL
- DUAL VOLUME CONTROLS



The ultimate in a stereo amplifier for top quality and design. With this system you can control all types of stereo and monaural program sources, and feed them through the dual 30-watt amplifiers. When you use it manually you have the combined 60 watts available, with a special switching arrangement for monaural phono cartridges. Features are CPF output circuit, Phasing Switch which eliminates hole in middle effect, a provision for remote balance control. Specifications: Power Output: 30 watts (60 watts peak) each channel for stereo, 60 watts (120-watts peak) for monaural. Harmonic Distortion: less than 1% at rated output. Frequency Response: 20 to 20,000 cps.  $\pm 0.5$  db. IM Distortion: less than 2% of rated output; Hum and Noise: (below rated output) fundamental -85 db. Inputs: (10 inputs—5 channel 1, 5 channel 2) magnetic cartridge, crystal cartridge, tape, tuner, auxiliary. Outputs: channel 1 speaker, channel 2 speaker, channel 1 tape, channel 2 tape. Dimensions: 15" W x 5 1/2" H x 13 1/2" D. Shpg. wt., 39 lbs.

- G-187WX DB230A—Less Cabinet—5.00 Down ... Net 189.50
- G-188W CEG Cabinet with Legs ... Net 8.00

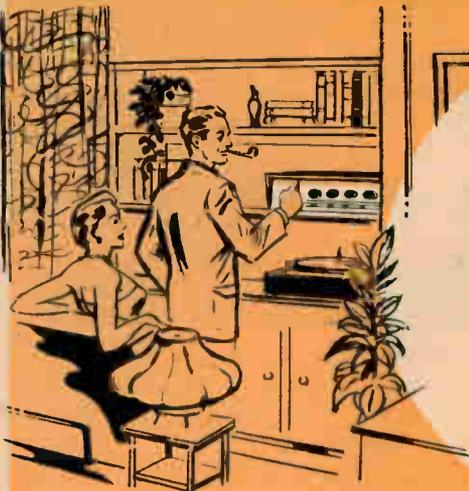

**NEW! Lafayette 50-WATT STEREO AMPLIFIER MODEL LA-250A**

*Impressive Performance... Handsome Styling... Another Unbeatable Lafayette*

**Value!**



**COMPLETE STEREO AMPLIFIER 99.50**

COMPARABLE TO AMPLIFIERS COSTING UP TO **189.50**

- 50 WATTS MONAURAL—25 WATTS EACH STEREO CHANNEL ● RESPONSE 15-40,000 CPS  $\pm .5$  DB (at normal listening level) ● UNIQUE "BLEND" CONTROL ● PREMIUM EL86 OUTPUT TUBES ● SEPARATE BASS & TREBLE CONTROLS ● CLUTCH-TYPE VOLUME-BALANCE CONTROL ● 3RD CHANNEL OUTPUT



*The Stereo 250*


The Stereo 250A... a completely new stereo high fidelity amplifier with a high quality of reproduction, remarkable versatility and new distinctive styling—worthy of a place in the finest stereo hi-fi music system. A full range of controls enables you to enjoy the utmost in listening pleasure in any situation. A unique "blend" control which provides continuously variable channel separation—from full monaural to full stereo—may be used to eliminate the exaggerated channel separation found in some stereo source material. Included is a clutch-type Volume Balance control for independent or simultaneous control of both channels, concentric Bass and Treble controls which provide independent tonal control of each channel and a 4-position switch which selects phono, tuner, auxiliary or tape head stereo inputs. Simple slide switches provide channel reversal and phase reversal—or you can reproduce either channel through both amplifiers. A loudness switch permits the volume balance control to function as a compensated loudness control. The LA-250A also features a 3rd channel output which may be used to feed a 3rd single channel amplifier and speaker to provide a wider sound spread, or a Tape Output jack for recording purposes, plus dual terminations for 4, 8 or 16 ohm speakers.

Advanced circuitry includes DC operated preamp and tone control tube filaments for hum-free operation, premium 6CW5/EL86 push-pull output tubes, individual bias and balance adjustments on each channel and a hum balance control.


**SPECIFICATIONS: POWER OUTPUT & DISTORTION:** 50 watts—25 per channel  $\pm 1$  db at less than 1% Total Harmonic Distortion at 1 KC. Less than 0.25% Total Harmonic Distortion at 1 KC at normal listening level (1 watt); less than 0.5% IM distortion at normal listening level. **FREQUENCY RESPONSE:** 15-40,000 cps  $\pm 0.5$  db at normal listening level. **HUM & NOISE:** 70 db below rated output at max. volume (high level inputs). **SENSITIVITY:** Far full output high level inputs 0.5V; Mag. Phono 3.5 MV at 1 KC. **CHANNEL SEPARATION:** Greater than 55 db at 1 KC; greater than 45 db from 20-20,000 cps. **IMPEDANCE:** 4, 8 and 16 ohms per channel. **POWER:** 200 watts; 110-125V AC 50-60 cycles.

Attractive beige vinyl laminated steel case. Handsomely designed brass anodized aluminum front panel. Sienna brown molded legs and matching knobs with polished brass inserts. Dimensions with legs and knobs, 14 1/2" w x 12 1/2" d x 5 1/2" h. Shpg. Wt., 20 lbs.

- LA-250AWX 5.00 Down ... Net 99.50

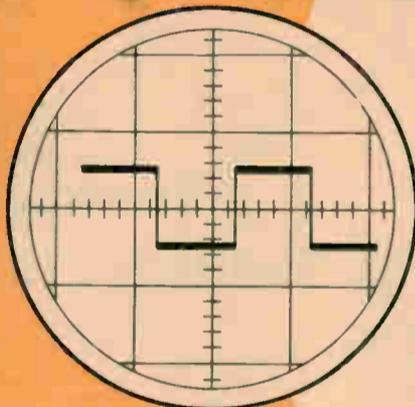

**NEW! FISHER X-202 50 WATT STEREO AMPLIFIER**

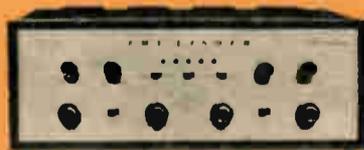

Typical Fisher quality and flexibility has been incorporated into this new 50 watt stereo amplifier and preamplifier (25 watts each channel based on the new IHFM standards). The X-202 offers a new Stereo Dimension Control which effectively spreads the sound from one speaker to the other, thus creating the illusion of a third "in-the-middle" speaker. Provision has also been made for an actual third-channel amplifier and speaker with front panel Center Channel Volume Control for independent volume control of a third-channel. Other controls include separate bass and treble controls for each channel, balance control, master volume control, selector switch, mono-stereo switch, phase switch and rumble and scratch filters. Frequency Response:  $\pm 1/2$  db from 20 to 20,000 cps with hum and noise more than 90 db below full rated output. IM Distortion: 0.4%. Harmonic Distortion: 0.8% at 50 watts. Phono Magnetic Sensitivity: 2 mv far rated output. Channel Separation: better than 50 db. Tube Complement: 3-7025, 2-7247, 3-ECC81, 4-7189, 1-GZ34. For 105-120 volts AC, 50-60 cycles. 15 1/2" W x 4 13/16" H x 12 1/2" D. Shpg. wt., 36 lbs.

- G-113WX Less Cabinet 10.00 Down ... Net 229.50
- Model 10U Wood Cabinets — Choice of walnut or mahogany. Shpg. wt., 6 lbs.
- G-101W (Specify Finish) 5.00 Down ... Net 24.95
- Model MC-1 Metal Cabinet in simulated leather. Shpg. wt., 9 lbs.
- G-109W ... Net 15.95

**MARANTZ QUALITY HI-FI COMPONENTS**

**MODEL 7C STEREO CONSOLE PREAMPLIFIER**



This new self-powered stereo preamplifier combines Marantz's remarkable quality construction with complete versatility and ease of operation. Front Panel Controls feature: 8-pos. Selector (Mic, Phono 1, Phono 2, Tape-head, FM-AM, FM Multiplex, TV, Auxiliary, 5-pos. Mode (Stereo, Stereo Reverse, Ch A, Ch B, Ch A+B) Volume, Balance, 4-Independent Bass and Treble Tone Controls, Record Equalizer, Tape Playback on Monitor, High Filter, Rumble Filter and Power Switch. Rear Controls feature: Output Level-sets, 3 Pairs of Outputs, Tape-head Equalizer Adjustments, 9 Pairs of Inputs, 6 AC Convenience Outlets and System Grounding Point. Frequency Response: 1/2 db 20-20,000 cps 1M. Distortion: 0.1%. Total Noise: in 20-20,000 cps audio range, 80 db below 10 mv phono input with RIAA curve. Tubes 6-ECC83, 12AX7. Dimensions: 14 1/2" W x 5 3/8" H x 8 1/2" D. Panel 15 3/4" W x 5 3/4" H. For 110-120v, 50-60 cycle AC. Shpg. wt., 16 lbs.

**MODEL 8A DUAL 30-WATT STEREO PHONIC POWER AMPLIFIER**



Professional in every respect the Model 8 Stereo Amplifier furnishes performance and workmanship found in high quality Broadcast or Laboratory equipment. Optimum performance is insured by built-in metered test instruments which provide simple, accurate adjustments. Power Output is 30 Watts per channel (60 watts peak) "Ultra-Linear" operation. 18-watts at Triode operation is possible by altering two connections. Response: 0.1 db from 20-20,000 cps at 30-watts. Distortion: harmonic, less than 0.1% 1M., less than 0.5%. Hum: 90 db-Input Sensitivity 1.3 volts. Power Supply employs 3 heavy duty telephone quality electrolytics and choke. Output impedance: 4, 8 and 16 ohms. Tubes: 2-6BH6, 2-6CH7, 4-EL34/6CA7. Overall size: 13 1/2" w x 7 1/4" H 10 1/2" D. For 117 volts 60 cycles AC. Shpg. wt., 55 lbs.

- G-250WX Marantz Model 8A Less Cabinet 10.00 Down ... Net 237.00
- Model 8G Gold Finish Perforated Snap on Grille for above. Shpg. wt., 1 lb.
- G-257W ... Net 9.00

# LAFAYETTE RADIO

## Pioneers in HI-FI!



LAFAYETTE CONTROL PANEL FOR COMPARATIVE LISTENING — INSTANTANEOUSLY DEMONSTRATES HUNDREDS OF HI-FI COMBINATIONS.



### "Let Your Own Ears be the Judge"

The best "independent testing laboratory" in the whole world is your own living room — because it represents the actual conditions under which you will listen to your hi-fi system.

The best instruments for you to judge sound quality are your own ears — because sound is a very personal thing.

So, if you wish, read the so-called "Best Buy Reports," remembering that they do not consider your desires, your ears, the characteristics of your home and your pocket book.

We at Lafayette are conscious of all these factors and invite you to either visit our sound salons if you are able to do so, or to avail yourself of Lafayette's "LISTEN AT HOME GUARANTEE" described on the right.

### The Smart Way To Buy HI-FI

*Lafayette's*

### "LISTEN AT HOME GUARANTEE"

Prove to yourself in your own living room, that the hi-fi system you select sounds as good at home as it does in our showroom.

### LISTEN AT HOME AND BE SURE!

With Lafayette's Famous 15 Day FREE Trial if not completely satisfied with your purchase once you get it home, you can return it within 15 days and get your Full Purchase Price returned to you, less only transportation charges.

# LAFAYETTE FOR LEADING STEREO COMPONENTS

## NEW! Lafayette 50-WATT

## COMPLETE STEREO PHONO SYSTEM

The Excitement and Realism of The Concert Hall!

# LA-250A




LAFAYETTE LA-250A  
50-WATT STEREO AMPLIFIER



### SELECT YOUR OWN CARTRIDGE



NEW GE VR-22  
(.7 MIL) DIAMOND  
STEREO CARTRIDGE



PICKERING 371.7D  
(.7 MIL) DIAMOND  
STEREO CARTRIDGE



SHURE M70  
(.7 MIL) DIAMOND  
STEREO CARTRIDGE



NEW ELECTRO-VOICE  
31MD7 (.7 MIL)  
DIAMOND  
STEREO CARTRIDGE

You may substitute any of the above cartridges at no additional cost.

COMPLETE  
STEREO SYSTEM

184.50

YOUR  
GUARANTEED BEST  
STEREO SYSTEM BUY!




LAFAYETTE  
SK-58  
FAMOUS  
FREE  
EDGE 12"  
COAXIAL  
SPEAKER



GARRARD  
RC121/11

WOOD BASE

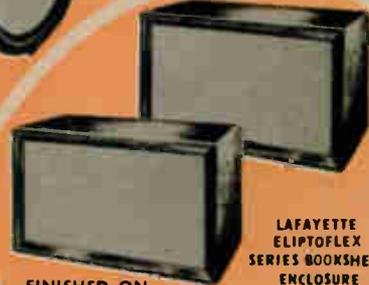

LAFAYETTE  
ELIPTOFLEX  
SERIES BOOKSHELF  
ENCLOSURE

FINISHED ON  
4 SIDES

### ALTERNATE ENCLOSURES



LAFAYETTE CAB-16  
SERIES RESONATOR ENCLOSURE

- LAFAYETTE LA-250A 50-WATT STEREO AMPLIFIER . . . 99.50
- GARRARD RC121/11 STEREO CHANGER . . . 41.65
- NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE . . . 24.45
- LAFAYETTE WOOD CHANGER BASE (Specify Finish.) . . . 3.95
- 2-LAFAYETTE SK-58 FAMOUS FREE EDGE  
12" COAXIAL SPEAKERS at 29.50 . . . 59.00

Regular Catalog Price ~~228.55~~

You Save 44.05

This superb system will add a new dimension in living to your home with all the excitement and realism of a live concert. The new Lafayette LA-250A 50-watt stereo amplifier (25 watts each channel) forms the heart of this outstanding stereo hi-fi phonograph music system—the features, versatility and advanced circuitry of this unit are second to none—all the necessary inputs and outputs are provided if you wish to add stereo tape and stereo FM/AM later. A unique blend control allows continuously variable channel separation—from full monoaural to full stereo. Also included is the famous Garrard RC121/11 intermix 4-speed automatic record changer with full manual or automatic operation supplied with your choice of stereo cartridges—the new GE VR-22 (.7 mil) diamond stereo cartridge, Pickering 371.7D (.7 mil) diamond stereo cartridge, Shure M70 (.7 mil) diamond stereo cartridge or the new Electro-Voice 31MD7 (.7 mil) diamond stereo cartridge. Supplied with the Lafayette changer wood base cut for the RC121 in your choice of finishes. These outstanding components are coupled with the 2-famous free-edge Lafayette SK-58 12" Coaxial speakers with built-in crossover network and brilliance level control. System supplied with plugs, cables and simple instructions. Shpg. Wt., 67 lbs.

HF-670WX HI-FI STEREO PHONO SYSTEM with choice of cartridge and mahogany, walnut or blonde changer base (please specify) 5.00 Down Net 184.50

HF-671WX Same as HF-670WX plus 2-Lafayette Eliploflex Series Bookshelf Enclosures finished on 4 sides (Specify finish). Shpg. wt., 143 lbs. 10.00 Down Net 247.50

HF-672WX Same as HF-670WX plus 2-Lafayette CAB-16 Series Resonator Enclosures. (Specify finish). Shpg. wt., 143 lbs. 10.00 Down Net 239.50


HF-673WX Same as HF-670WX except speakers furnished are 2-University 312 12" 3-way speakers. Shpg. wt., 67 lbs. 10.00 Down Net 247.50

HF-674WX Same as HF-673WX plus 2-Lafayette Eliploflex Series Bookshelf Enclosures finished on 4 sides (Specify finish) Shpg. wt., 143 lbs. 10.00 Down Net 309.50

HF-675WX STEREO AM-FM PHONO SYSTEM. Same as HF-670WX but including the new Lafayette LT-50 FM-AM stereo tuner. Shpg. wt., 85 lbs. 10.00 Down Net 299.50

## McIntosh

### McINTOSH C20 STEREO COMPENSATOR

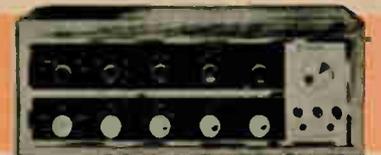

Full stereo flexibility is provided plus built-in protection for your investment in monophonic records. Mode Selector has 6 positions. Internally decouples stereo phono cartridge to offer best quality reproduction from monophonic records. Separate treble and bass tone controls. Has separate channel back panel controls to balance the frequency response of the system independent of front panel controls. Equalization: Individual bass and treble 6 position switches, including NAB tape and flat for any low level flat source. Provides Fletcher-Munson compensation, continuously variable. Rumble filter and 2-position (9KC and 5KC) high frequency cutoff to suppress hiss and noise. 180° phase reversal control. Tape: Front panel jacks, push button switch controlled, to permit the addition of portable recorder, Tape Monitor. Freq. Response: ± 0.5 db 20 to 20 KC. Distortion less than 0.2% at rated output. Hum and noise inaudible. Outputs: Main—2.5V with rated input, tape—0.25V with rated input. Power requirements: 117VAC, 35 watts. A.C. Aux. Outlets: 1 unswitched and 3 switched. Less Case. Size 14 1/2" x 12" x 4". Shpg. wt., 19 lbs.

G-170WX . . . 10.00 Down . . . Net 225.00  
Model L-55. Cabinet for C20 in mahogany or walnut. Shpg. wt., 5 lbs. Specify finish.

G-174W . . . 2.00 Down . . . Net 25.00

### McINTOSH MC-30 30-WATT AMPLIFIER



Superlative Amplification with 1M distortion at 1/2% and Harmonic Distortion at less than 1/4%. Input sensitivity 0.5 volt with gain control. Frequency Response ± 1 db between 15-50,000 cps. Hum and noise are -90 db. Amplifier outputs of 4, 8, 16 and 600 ohms (balanced). Tubes are 2-12AX7, 12-AU7, 12-BH7, 2-1614, 5 U4GA (Rectifier). Chrome and black finish. Dimensions 13 1/2" x 8" x 8". Power consumption 155 watts, 117/125v, 50/60 cycles AC. Shpg. wt., 34 lbs.

G-171WX . . . 5.00 Down . . . Net 141.50

### HARMAN KARDON TA230 "STEREO FESTIVAL" 30-WATT STEREO AMPLIFIER & FM-AM STEREO TUNER



This handsome instrument provides complete facilities and controls for every stereo function in one compact chassis. Included are separate sensitive FM and AM tuners for simultaneous reception plus a 30 watt stereo amplifier (15-watts each channel). Separate electronic tuning bars for AM & FM are featured and H-K Friction-Clutch tone controls provide separate bass and treble adjustment for each channel. Frequency response: ± 0.5db 15-30,000 cps. Hum inaudible. Cross talk better than 50db. FM sensitivity: 2.5 microvolt for 20db of quieting. Impedance: 8 & 16 ohms. Total of 15 front-panel controls. 4 pairs of inputs; 2 tape outputs plus multiplex output. 20 tubes; 4 silicon rectifiers; 1 germanium diode detector. Size 15 1/4" x 6 1/2" x 12 1/4". For 110-120 V. 50-60 cycles. Shpg. wt., 35 lbs.

G-210WX (Copper finish), G-211WX (Brass finish), G-212WX (Satin Chrome finish). Please specify. 10.00 Down Net 259.95

AC30 Copper & black metal enclosure for TA230. Shpg. wt., 2 lbs.

G-213W . . . Net 12.95

WW30 Walnut enclosure for TA-230. Shpg. wt., 4 lbs.

G-214W . . . 2.00 Down . . . Net 29.95

# NOW Lafayette COMBINES THE INCOMPARABLE QUALITY of COMPONENT STEREO HI-FI with the ELEGANCE of *Custom Cabinetry.*

Custom Crafted Cabinets Individually Tailored For YOUR HOME • YOUR TASTE and YOUR BUDGET

**319.50** 10.00 Down  
COMPLETE STEREO ENSEMBLE



**DESIGN FLEXIBILITY**... place cabinets together as a complete Home Entertainment Center or utilize separately to suit your own room arrangement. Modular concept permits the addition of more units at any time.



54.50

57.50

54.50



Slide-Out Drop Front plus Pull-Out Record Section are custom features designed to protect your valuable components.



LA-250A STEREO AMPLIFIER



GARRARD RC121

GE VR-227



5K-58 COAXIAL SPEAKER



OPTIONAL TUNER

LT-50

LAFAYETTE HAS REFUSED TO COMPROMISE... you need not sacrifice your taste in fine furniture in order to achieve component sound quality, nor compromise beautiful music for fine cabinetry. The performance of these brilliant cabinet systems is in every respect the equal of Component Quality. Until now, such perfection has been enjoyed, only by the Hi-Fi enthusiast who reproduced stereo music with a combination of separate components — Lafayette's audio experts have integrated these very same components into a series of acoustically correct decorative styled cabinets. Bring the full beauty and realism of stereo into your home with these luxurious custom crafted cabinets and matched components integrated into a superb STEREO ENSEMBLE.

► The new Lafayette LA-250A 50-Watt stereo amplifier (25 watts each channel) provides every outstanding feature you could ask for in an amplifier. Response 17-21,000 cps; less than 1% distortion.

► The famous Garrard RC121/11 4 speed Automatic record changer is supplied with the new GE VR-227 stereo cartridge for perfect reproduction.

► System is supplied with 2-renowned Lafayette 5K-58 Coaxial Speakers. 1 1/4 lbs. magnet, built-in crossover network and "sheepskin" free edge cone mounting make this one of the finest speakers available today. Supplied with easy to follow instructions. (Refer to HF-670, Pg. 3 for complete information on these components.)

► Stereo Ensemble consisting of above components plus complete set of custom crafted cabinets. Shpg. wt., 222 lbs. Equipment is separately and securely packaged to insure safe shipment. (Specify cabinet finish) HF-713WX 10.00 Down Net 329.50

► Stereo Ensemble — same as above but with the addition of Lafayette LT-50 FM-AM Stereo Tuner featuring 1 μv sensitivity, AFC and multiplex output. Shpg. wt., 240 lbs. Equipment is separately and securely packaged to insure safe shipment. HF-714WX 10.00 Down Net 449.50

Each individual unit is a complete beautifully finished cabinet in itself. Due to their modular concept extreme flexibility has been achieved. The equipment-speaker units fit together perfectly or may be placed separately in the room to suit your own arrangement for stereophonic or monophonic reproduction. The speaker enclosure is acoustically designed to house up to a 12" speaker or speaker system. The equipment cabinet is built to house pre-amplifier and/or amplifier, tuner, or tape recorder-player-and transcription table or record changer.

A removable shelf is provided which is adjustable in height for mounting separate components.

Equipment Cabinets: Inside Dimensions are 18 3/4" W x 13 3/4" H. Overall size: 20" W x 32 1/2" H x 18" D. Shpg. wt., 55 lbs.

CAB-87WX Walnut, CAB-88WX Mahogany, CAB-89WX Blande, CAB-90WX Ebony. (Specify Finish.)

5.00 Down Net 57.50

T Adapter Board — Converts equipment cabinet for use with 12" transcription turntable. (Specify Finish.)

CAB-91W Net 1.50

Speaker Enclosure: Dimensions 20" W x 32 1/2" H x 10" D. Shpg. wt., 50 lbs.

CAB-115WX Walnut, CAB-116WX Mahogany, CAB-117WX Blande, CAB-118WX Ebony. (Specify Finish.)

2.00 Down Net 54.50

## COMPLETE HARMAN-KARDON FM-AM STEREO PHONO SYSTEM




H-K TA230

GLASER-STEERS GS-400



New GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE



LAFAYETTE ELIPTOFLEX SERIES BOOKSHELF ENCLOSURE



2-LAFAYETTE 5K-58

### COMPONENTS

- H-K TA230 STEREO FESTIVAL (Less Cage) 259.95
- GLASER STEERS GS-400 STEREO RECORD CHANGER (LESS BASE) 46.55
- NEW G. E. VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE 24.45
- 2-LAFAYETTE 5K-58 FAMOUS FREE EDGE 12" COAXIAL SPEAKERS @ 29.50 ea. 59.00

**LAFAYETTE SYSTEM PRICE 293.50**

Only 10.00 Down

Complete stereo system as listed above. Shpg. wt., 70 lbs. HF765WX 10.00 Down Net 293.50

Same as above, but with 2-Lafayette Eliptoflex Bookshelf Enclosures finished on 4 sides (Specify Finish) Shpg. wt., 118 lbs.

HF-766WX 10.00 Down Net 365.00

Same as HF-765WX, but with 2-University 312 12" Triaxial Speakers. Shpg. wt., 70 lbs.

HF-767WX 10.00 Down Net 357.00

Model GSB Woodbase for GS-400 in ebony with satin brass trim. Shpg. wt., 5 lbs.

PK-350W Net 9.60

## WRITE FOR LAFAYETTE'S SYSTEM-PLAN PRICES

If you wish to assemble a music system made up of components of your own choice, let Lafayette "price" the high-fidelity system you select. In order to qualify as a system, there must be at least one of each in the following groups:

1. amplifier
2. speaker
3. music source — record changer, turntable, tuner or tape deck

A complete receiver (combination tuner and amplifier) may be ordered in place of the separate amplifier and tuner.

Just send us a list of the components you desire, and a special, money-saving package price will be sent to you promptly. Fill out the coupon below, specifying the makes and models of the components you want priced, and mail it today to our Audio Division. No charge or obligation, of course.

STOCK NO.	QUANTITY DESIRED	DESCRIPTION	PRICE EACH

Total catalog price of components

Lafayette's System-Plan Price →

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ Zone \_\_\_\_\_ State \_\_\_\_\_



# DIAMOND STYLI AT LOWEST PRICES ANYWHERE

## LAFAYETTE DIAMOND and DIAMOND-SAPPHIRE STYLI MADE FOR LAFAYETTE BY THE FOREMOST AMERICAN MANUFACTURERS

### KEY TO POINT CODES HOW TO ORDER

The symbols in the column headed "PT SIZE" are explained in the table below.

LP = SINGLE 1 MIL MICROGROOVE FOR 33 1/3 AND 45 RPM

AG = SINGLE 2 MIL ALL GROOVE FOR ALL SPEEDS

ST = SINGLE 3 MIL STANDARD FOR 78 RPM

COMB = DUAL 1 MIL DIAMOND AND 3 MIL SAPPHIRE

Identify your needle by cartridge number and illustration and order by stock no. Note that all needles listed here are for monaural cartridges.

### ALL DIAMOND STYLI ARE NOT ALIKE

Only Lafayette's Superior Diamond Styli are


- MADE FROM WHOLE DIAMONDS
- PRECISION GROUND AND POLISHED
- VERTICALLY AND EDGEWISE GRAIN ORIENTED
- SHADOWGRAPHED



Each Lafayette's diamond stylus is made from individual diamond, properly oriented and ground to close tolerance; shadowgraph tested to give you less wear per play and long service life.

### FULL 1 YEAR GUARANTEE ANY DIAMOND or DIAMOND-SAPPHIRE NEEDLE IN THIS LISTING

# 2.59

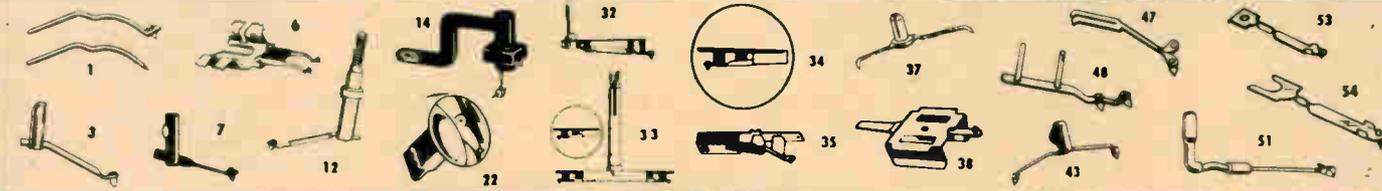

STOCK NO.	SIZE	FIG.	CARTRIDGE	REPLACES JENSEN NO.	STOCK NO.	SIZE	FIG.	CARTRIDGE	REPLACES JENSEN NO.	STOCK NO.	SIZE	FIG.	CARTRIDGE	REPLACES JENSEN NO.
<b>DIAMOND NEEDLES</b>														
<b>FOR ADMIRAL CARTRIDGES</b>					<b>FOR MAGNAVOX CARTRIDGES</b>					<b>FOR RONETTE CARTRIDGES</b>				
PS-10	LP	1	409A11, 409A300, 98A54-1	JPS-30LPD	PS-35	LP	54	560176, 560180	CRA-55LPD	PS-35	LP	53	TO-200, TO-222, TO-284, TO-400 series, RA284, DT60 series, TR88, A	CRA-55LPD
PS-16	COMB	6	409B21	JPS-33SD	PS-70	COMB	51	560161	5-66SD	PS-69	LP	54		CRA-56LPD
PS-17	LP	7	409A30	A81LPD										
<b>FOR ASTATIC CARTRIDGES</b>														
PS-20	LP	3	AC Series, 40T, 41T, 40-1, 41-1, 42-1, 90T series, 10L-3, 11L-3	A-75LPD	PS-56	COMB	43	45-9612, 76-4649, 425-0016	PH-13SD	PS-16	COMB	6	WC10, WC10D, PC2 series, PC3 series, PC4 series, PC5 series, P-72, P-75, P-78, P-75, P-76, P-77, P-80, W-21, W-21AR, W-22A, WC-24, WC-25 Series	JPS-35SD
PS-23	LP	12	40B	M-70LPD	PS-56	COMB	43	45-0009, 425-0011, 425-0014	PH-13SD	PS-10	LP	1		JPS-30LPD
PS-25	COMB	14	GCD, 409, 55-T, 55TJ, 55TM	A-71SD						PS-70	COMB	51	IP-LB-10, 2TD, 2TS, 2T-SD, 2T-LB-D, 2T-LB-S, 2T-LB-SD, 9980-S, 9980-SD, 9980D, ST, ST-LB-S, ST-LB-SD	5-46SD
PS-23	LP	12	410	M-70LPD						PS-32	COMB	51	3T, 3TS, 3TD	5-61SD
PS-17	LP	7	CAC, CO, CO-1, LOD, LOD-1, QT, QT-33, 44-T, 46-1, 48-1, 166T Series	A-81LPD	PS-44	COMB	47	P12/RG	RX550SD	PS-17	LP	7	8X	A-81LPD
PS-35	LP	54	118, 120, 124 series, 310T, 312T, 420, 422, 424TS series, 310-1, 310-TB, TS, 312-TB, TS, 414-1	CRA-55LPD	PS-45	COMB	48	PE-8, PE10	RX551SD	PS-10	LP	1	F11	JPS-30LPD
					PS-46	LP	22	P7000 (MJ, MD) (LP only)	RX552LPD					
<b>FOR MAGNAVOX CARTRIDGES</b>														
PS-51	COMB	37	560176, 560180, 560133, 560151, 560169-1, 560170	M-50SD	PS-23	LP	12	74067	M-70LPD	PS-17	LP	7	8X	A-81LPD
					PS-10	LP	1	55652, 76257, (988370-1), 75044	JPS-30LPD	PS-10	LP	1	F11	JPS-30LPD
					PS-20	LP	3	76257, (988370-2)	A-75LPD					
					PS-70	COMB	51	78748, 79807, 100653	5-46SD					
					PS-25	COMB	14	100329	A-71SD					

### STEREO DIAMOND STYLI 2.59 AT LAFAYETTE'S LOW PRICES!

(A) .7 mil diamond for G.E. GC-7 cartridge. PS-87 ..... \$2.59

(B) .7 mil diamond for Ronette turnover cartridges OV, OVI, T1 and single BF40. PS-81 ..... \$2.59

(C) .7 mil diamond for Electro Voice series 26 stereo turnover and series 21 single needle. PS-80 ..... \$2.59

(D) Combination .7 mil (stereo) diamond and 3 mil (78 RPM) sapphire for Sonotone 8T and 8TA PS-82 ..... \$2.59  
(E) Same as above but with .7 mil (stereo) diamond and 1 mil (monaural LP) sapphire. PS-83 ..... \$2.59

(F) .7 mil diamond for RCA 106770 or 106771. PS-85 ..... \$2.59

(G) .7 mil diamond for RCA 106770 or 106771. PS-85 ..... \$2.59

### CONVERSAPHONE LANGUAGE COURSES

Learning languages is fun by the amazing new Conversaphone method. In minutes, you'll be understanding and speaking a new language. Expert instructor teaches you perfect pronunciation as you follow each phrase in the lesson manual. Contains 1-10" 33 1/3 RPM record and manual. Shpg. wt., 1/2 lb.

PR-28	French	Net 2.79
PR-29	Spanish	Net 2.79
PR-30	Italian	Net 2.79
PR-31	German	Net 2.79
PR-32	Hebrew	Net 2.79
PR-33	Russian	Net 2.79
PR-34	Japanese	Net 2.79
PR-35	Portuguese	Net 2.79
PR-36	Swedish	Net 2.79
PR-37	Finnish	Net 2.79
PR-38	Norwegian	Net 2.79
PR-39	Mod. Greek	Net 2.79

### MULTILINGUA LANGUAGE COURSE

FRENCH	6.95
ITALIAN	
GERMAN	
SPANISH	

You can now learn to speak French, Italian, German or Spanish easily and pleasantly in your own home and progress at your own speed. Features the new simplified participation method that helps you to learn the lessons faster and retain them longer. It is a complete language course with 48 lessons on two 12" hi-fi long playing records. You learn with native speakers! The recorded lessons are printed in an illustrated conversation manual. Also included is a combination of grammar and dictionary book. When ordering, please specify the language desired. Shpg. wt., 4 lbs.

PR-15	List 9.95	Net 6.95
4-LANGUAGE COMBINATION COURSE	All 4 languages, French, Italian, German and Spanish, on 8-12" LP records, 192 lessons, 2 books.	
PR-16		Net 10.95

### REPLACEMENT STYLI FOR GE CARTRIDGES

**FOR GE VR II CARTRIDGES (FIG. 35)**  
Direct replacements for clip-in styli in GE VR II series models 4G-050, 4G-052, 4G-053, 4G-040, 4G-041, 4G-043, 4G-041 cartridges. Avg. shpg. wt., 2 oz.  
PS-48-1 mil diamond LP clip-in stylus. Replaces GE 4G-01D Net 2.59  
PS-346-1 mil sapphire LP clip-in stylus. Replaces GE 4G-015 Net 1.15  
PS-348-3 mil sapphire 78 clip-in stylus. Replaces GE 4G-033 Net 1.15

**MODERNIZATION ASSEMBLIES (FIG. 33)**  
Modernize your old triple-play cartridge. These assemblies replace both the old and new series "A." Once installed, you can replace one point at a time.  
DIAMOND SAPPHIRE. Replaces old RPJ-013 and new RPJ-013A. Avg. wt., 2 oz. PS-46-list 31.00 Net 2.59  
DUAL DIAMOND. Replaces old GE RPJ-012 and new RPJ-012A. PS-79-list 49.95 Net 7.95  
DUAL SAPPHIRE. Replaces old GE RPJ-010 and new RPJ-010A. PS-54S-list 5.95 Net 2.10

### STYLI FOR OLD TYPE GE CARTRIDGES (FIG. 32)

Exact replacement for all old type single needle GE cartridges. Avg. wt., 2 oz.  
PS-43-Diamond 1 mil (LP) replaces GE RPJ-004 Net 2.59  
PS-541-Sapphire 1 mil (LP) replaces GE RPJ-005 Net .99  
PS-540-Sapphire 3 mil (78) replaces GE RPJ-001 Net .99

### FOR GE SERIES A CARTRIDGES (FIG. 34)

Individual styli replacements that clip in to all GE "A" series. Avg. wt., 2 oz.  
PS-47-Diamond 1 mil (LP) replaces GE RPJ-01D Net 2.59  
PS-543-Sapphire 1 mil (LP) replaces GE RPJ-01S Net 1.15  
PS-542-Sapphire 3 mil (78) replaces GE RPJ-03S Net 1.15

### DIAMOND STYLI FOR



AS LOW AS

# 2.59



### 2.95 LAFAYETTE HIGH FIDELITY STEREO-MONAUROAL TEST RECORD

- TESTS RUMBLE EACH CHANNEL
- TESTS LEVEL EACH CHANNEL
- TESTS BALANCE
- TESTS EQUALIZATION
- STYLUS WEAR TEST
- TESTS RESONANCE
- INCORPORATES PHASE CHECK

A Lafayette exclusive to help you check both stereo and monaural systems. For stereo testing this two-sided 12" L.P. stereo record has on its stereo side two 1000 cycle bonds to check the level of each channel separately; balance check to set the level of each channel using special metronome recording; rumble test. There are stylus wear test grooves on both outer and inner edges of each side to check both stereo and monaural styli. Incorporates phase adjusting check to simplify phasing of speakers. For monaural testing it provides an RIAA equalization test

in 9 steps from 30 to 15,000 cycles, a continuous glide band from 10 to 35,000 cycles, to test for resonances of tone arm or of cabinet. The periodic use of this record to check on your equipment performance will easily pay off by catching any costly deficiencies or by diagnosing faults and errors. Also features sections of stereo sound effects of jet planes, boat whistles, etc. A terrific value and a "must" for the Hi-Fi enthusiast. Comes with complete instructions for use. Shpg. wt., 1 lb.  
PR-14 ..... Net 2.95

### 4 SPEED PHONO MOTOR WITH TURNTABLE

Quiet, dependable A-C operation assured by rubber shock-mounted friction drive motor. Speed change control through idler driving an 8" turntable. Mounting centers 4 1/2 x 3 3/8". 2 1/8" depth below base plate. Shpg. wt., 3 1/2 lbs.

ML-24 Phono and turntable. Net 5.35  
PK-149 Mounting board for motor. Net 95c

# 5.35



### WIRELESS BROADCASTER

Play your phonograph through any radio in the house without connecting wires. Talk through your radio by microphone.

Lafayette's new wireless broadcaster will extend your enjoyment of your phono-player to every room that has a radio. Connect phono to wireless broadcaster, tune in any radio to the wireless broadcaster, which broadcasts on an adjustable frequency between 700KC - 1700KC. Pick your spot. Will take crystal or magnetic cartridges and also microphones for voice broadcast. Has volume control with "on-off" switch. Size 4 1/2 x 5 1/2 x 1 1/2". Completely wired and assembled with all tubes and operating instructions. 110V AC/DC operation. Shpg. wt., 4 lbs.

LA-14 Wireless broadcaster. Net 9.75  
PA-24 Crystal microphone. Net 4.25

# 9.75



### 2-TUBE PHONO AMPLIFIER 4.50 with Tubes



A two tube phono amplifier using a 50L6 and 35Z5 tube as rectifier. Well-built, good tone and volume. Contains volume control with switch. AT A BIG SAVING! Shpg. wt., 3 lbs.  
PK-24-Two tube amplifier. 4.50

COMPLETE WITH TUBES

TR-10 OUTPUT TRANSFORMER - matches output of either PK-23 or PK-24 to 3-4 ohm voice coil. Shpg. wt. 1/2 lb.  
TR-10 singly, ea. .49 in lots of 5, ea. .45

### AC-DC Phono Amplifier 2.95



Equipped with a variable tone control and a separate volume control. Delivers two watts output. Phonograph motor connects to the amplifier. Uses 12AV6, 50C5, and 35W4 rectifier. For 110-120V, 60 cycles AC or 110-120 V, DC. Supplied with line cord and plug, but less tubes. Shpg. wt. 2 lbs.  
PK-23 ..... Net 2.95

KIT OF TUBES

Complete set of 3 tubes for above. Shpg. wt., 1 lb.  
KI-59 ..... Net 2.75

### 99c LAFAYETTE SPECIAL VALUE STYLUS PRESSURE GAUGE

With the advent of stereo records, correct stylus pressure becomes all important in obtaining the best reproduction and least stylus and record wear. Lafayette's stylus pressure gauge is an accurate device that allows you to read with the pickup in normal playing position. Range, 0-30 gm. No spring and minimum moving parts. Shpg. wt., 1 lb.  
PK-223 ..... Net 99c

### NEW! AUTOMATIC CUT-OFF

- Automatically Turns Off Hi-Fi System
- Plugs In—No Special Wiring
- May Be Used With Record Changer Employing Automatic Shut-Off



# SPECIAL PRICE 3.45

Automatically shuts off complete Hi-Fi system after last record has been played. May be used with record changer employing an automatic shut-off. Components are plugged into unit which in turn plugs into AC power outlet. Provision for automatic or manual operation. Mounts externally or internally. Size 5 1/2" x 2" x 1 1/2".  
PK-284 ..... Net 3.45

### NEW! EXCLUSIVE LAFAYETTE STYLOCHRON




- PROTECT YOUR PRECIOUS RECORDINGS.
- NO MORE GUESS WORK - KEEPS AN ACCURATE RECORD OF NEEDLE USE.

# 4.95

More precious recordings are ruined by tardy replacement of the needle than by any other cause. Now, there is no need to let this happen, especially to your doubly precious stereo recordings. Lafayette Stylochron lets you know just how long your needle has been in use so that you can replace the worn needle at the proper time, before it can do damage to your records. The Stylochron is quickly and easily mounted on your motor board or other convenient place. The moment your record changer or turntable starts, the Stylochron begins to register. It stops when the turntable stops. The 1000 hour dial will tell you at any time how long you have been using the needle. Dial is marked off in 50 hour units. You can remove your stylus for inspection at any predetermined number of hours. Diameter of the face plate is 2 1/4". Extends 1 1/2" below or behind panel. Complete with instructions. Shpg. wt., 2 lbs.  
PK-224 ..... Net 4.95

# Lafayette

## LEADS IN TAPE RECORDING VALUES!



**ALL LAFAYETTE TAPES SOLD ON MONEY-BACK GUARANTEE  
GUARANTEED FIRST QUALITY SPLICE-FREE**

**You Be The Judge!**

**NEW! MYLAR BASE RECORDING TAPE**

Lafayette's huge purchasing power makes it possible to provide you with first-quality tape at about half the price you would pay for the same tape with the manufacturer's own labels. **WE GUARANTEE ABSOLUTE SATISFACTION OR YOUR MONEY BACK.** These splice-free mylar base recording tapes are quality manufactured to assure uniformity of frequency response and complete absence of drop-outs. In addition, they are extremely durable and break-resistant and are capable of withstanding temperature and humidity changes. The wide frequency response characteristics combined with low noise level and long playing time opens new horizons of recording possibilities for the high fidelity enthusiasts as well as professional sound engineers. Av. Shpg. wt., 12 oz.

RT-12 1800 ft. on 1 mil Mylar base, 7" reel diameter. **2.50**  
Lots of 5, Ea. 2.25 Singly, Ea.  
RT-13 2400 ft. on 1/2 mil Mylar base, 7" reel diameter. **3.69**  
Lots of 5, Ea. 3.39 Singly, Ea.

**ACETATE BASE RECORDING TAPE**

These popular high quality tapes are coated uniformly with red oxide on plastic base with high output and uniform frequency response covering the entire audio spectrum, 40-15,000 cps, completely splice-free. Another Lafayette outstanding value for all hi-fi recordists, backed up by our Money Back Guarantee. Using 7 1/2 cps dual track, 1200 ft. reel provides 1 hr. of recording time while 1800 ft. reel provides 1 1/2 hr. of recording time. Avg. Shpg. wt., 14 oz.

RT-10 1200 ft. on 1 1/2 mil acetate base, 7" reel. **1.59**  
Lots of 5, Ea. 1.49 Singly, Ea.  
RT-11 1800 ft. on 1 mil acetate base, 7" reel. **1.98**  
Lots of 5, Ea. 1.88 Singly, Ea.

**NEW! LAFAYETTE TENSILIZED MYLAR  
RECORDING TAPE**

Strong and durable because it has been pre-stretched.  
Shipping weight 1 lb.  
RT-16 2400' on tensilized mylar base. **4.95**  
Lots of 5, Ea. 4.45 Singly, Ea.



**TELEPHONE  
PICKUP  
COIL**

**1.89**

This telephone pick-up coil is designed to feed into the microphone input of either a tape recorder or any high gain amplifier. The pick up can be easily attached to the telephone by the use of a rubber suction type attachment. The coil is electrostatically shielded to minimize hum pick-up. When properly positioned on telephone handset, the output of this device is more than adequate for a fully modulated tape recording. Complete with 5' shielded cable. Shpg. wt., 6 ozs.

MS-693 ..... Net 1.89



**TAPE SPLICER  
WITH WAIST-TYPE SPLICE**



QUANTITY  
LIMITED!

**98¢**

Over  
**70% Off!**

Here's a terrific value! The famous RCA Autasplicer cuts a diagonal flap joint in the tape and trims the splicing tape and tape edges with an indented trim cut. The slight "waists" formed prevent adhesive from contacting recorder mechanism and prevent layer-to-layer adhesion. No more "wow", "flutter", or erratic performance due to adhesive deposited on tape guides, etc. Consists of a tape alignment guide with self-adhesive back for fastening to any surface, cutting unit with diagonal cutter on one side and waist-type cutters on other, and protective cover for blades. Shpg. wt., 6 oz.

SP-144 ..... Net 98

**EMPTY  
PLASTIC  
REELS**



**METAL  
STORAGE CANS**

Your best protection for valuable recorded tapes and movie film. Cans are ribbed for easy storage. Precision fit makes opening and closing easy. Attractively finished in grey. 3 sizes to choose from to fit any size reel. Av. shpg. wt., 8 ozs.



**METAL TAPE  
STORAGE CHEST**

STANDARD CASE: Sturdy all steel carrying case. Holds 12 7" or 5" reels and cans. Twin snap locks for positive closure; perfect portability. Guards against exposure and accidental erase. Platinum gray hammered finish. Metal separators between reels. Includes index cards. Shpg. wt., 5 lbs.  
ML-60 ..... Net 2.99

Individually boxed plastic reels for recording tape. Avg. Shpg. wt., 4 oz. singly.

MS-692. 5" reel. In lots of 6, Ea. .26 Singly, Ea. .29  
MS-267. 7" reel. In lots of 6, Ea. .38 Singly, Ea. .45

ML-154 3" Can. lots of 6, Ea. .18 Singly, Ea. .20  
ML-155 5" Can. lots of 6, Ea. .27 Singly, Ea. .30  
ML-61 7" Can. lots of 6, Ea. .36 Singly, Ea. .39



**3.95**

**LAFAYETTE TAPE HEAD DEMAGNETIZER**


• REMOVABLE POLEPIECES

Lafayette Tape Head Demagnetizer uses removable polepieces. Three complete sets are furnished: straight, 45°, and 90° (right angle), permitting quick and easy use with any tape head. Far from being a luxury, a tape head demagnetizer is necessary for best tape recorder performance. Although unmagnetized when new, tape heads gradually become magnetized by sharp switching pulses occurring while switching the recorder from play to record or vice versa. The solution is to use a demagnetizer to re-

• EXTRA CONVENIENT

move this permanent magnetism from the head, thus reducing the noise level. Periodic head demagnetization is required for all tape recorders to insure optimum signal-to-noise ratio. Now Lafayette enables anyone with even the most modest budget to perform this necessary demagnetization with a minimum of effort. For 110 volts 60 cycles. Shpg. wt., 1 lb.  
PK-238—Tape Head Demagnetizer **3.95**

**NEW! TruTest STEREO/5 AMPLIFIER**

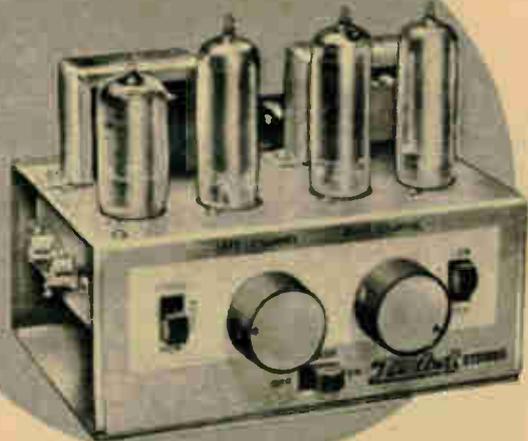

- Individual Stereo Volume-Balance Controls
- For Both Stereo and Monaural
- Fully Wired — Ready For Stereo

*Never Before Such Quality At This Price!*


**10.95**

One of the finest stereo values we have ever offered. This rugged, precision made dual channel stereo amplifier will amaze you with its fine quality... Ideal for that low cost stereo system you're planning for your home or business. Perfect for converting your present console or portable to stereo. Controls include separate left channel and right channel volume controls, stereo-monaural mode switch, tone control switch and on-off switch. Provision for crystal or ceramic cartridge. 4 ohm output terminals accept most speakers. Tube complement: 2-35C5, 1-35W4 and 1-12AX4. Size: 4 1/2" H x 5 1/2" W x 4 1/2" D. 115 volt 60 cycles. Shpg. wt., 5 lbs.

PK-441 ..... Net 10.95

**LAFAYETTE BRINGS YOU A COMPLETE STEREO  
PHONO SYSTEM AT A PRICE YOU CAN AFFORD**

**33<sup>50</sup>**  
only 2.00 Down

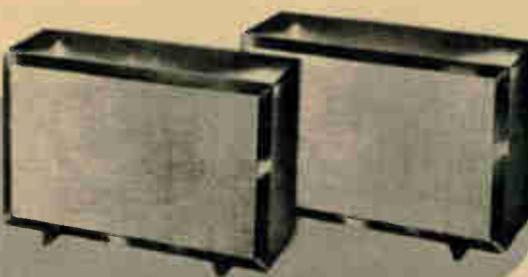

Now you can have genuine component stereophonic sound at the lowest price ever. Complete in every detail this system consists of: the TruTest Stereo/5 Amplifier (as described above), Lafayette ML-24 4-speed Turntable for 16-2/3, 33-1/3, 45 and 78 rpm records, easy to install pre-cut mounting board, Lafayette PK-171 Stereo Tone Arm with wide-range Plug-In Crystal Stereo Cartridge and

.75 mil sapphire styli for stereo and monaural records. Completing the system are 2 of Lafayette's amazing SK-109 miniature speaker systems. Housed in attractive mahogany veneer enclosures each speaker is supplied with 25 feet of hook-up cable and measures only 9 1/2" W x 7 3/4" H x 3 1/8" D. Shpg. wt., 20 lbs.

PK-443WX ..... 2.00 Down ..... Net 33.50

**TELEPHONE PICKUP  
FOR RECORDING**

**TELEPHONE  
CONVERSATIONS**



Induction telephone pickup. Telephone conversations can now be picked up with no tapping of wires or special telephone circuits. Simply place the phone base, either cradle or upright type, on the pickup platform and connect the leads to the high impedance input of any medium gain audio amplifier, or directly to any tape, disc or wire recorder. Shpg. wt. 8 ozs.

MS-16 ..... Net 1.95

**1.95**



**ROBINS TAPE THREADER**

No more awkward fumbling while threading a reel. A few turns on the crank and you're ready to play or record. Saves time and tape. Shpg. wt., 2 oz.


MS-222 ..... .79

**HIGH FREQUENCY TWEETER  
WITH ACOUSTIC LENS**

DIRECT IMPORTATION MAKES THIS PRICE POSSIBLE

- FREQUENCY RESPONSE FROM 2000 CPS TO BEYOND AUDIBILITY
- LOUVERED ACOUSTIC LENS FOR UNIFORM SOUND DISPERSION
- HANDLES 25 WATTS OF POWER
- PRICED EXCEPTIONALLY LOW

New high frequency tweeter featuring a louvered acoustic lens for uniform sound dispersion and capable of handling up to 25 watts of distortion-free power. The directional tendency of high frequency notes is overcome by the natural wide dispersion angle of the short horn and the acoustic lens which disperses and radiates the high notes smoothly throughout the entire listening area. The lens is detachable for panel mounting, with a separate base for the tweeter furnished for external mounting where desired. Aluminum voice coil has 16 ohms impedance. Size: 4 1/4" long x 3" diameter, lens extends 2 1/4". Requires a crossover network, preferably one with a level control, such as the LN-2. With full instructions. Shpg. wt., 5 lbs.



**14.95**

NW-7 ..... Net 14.95

**NEW! 2- and 3-way  
L/C CROSSOVER NETWORK**



- 2- OR 3-WAY
- CHOICE OF 4 CROSSOVER FREQUENCIES
- 6 CROSSOVER COMBINATIONS
- METAL CABINET
- BUILT-IN BRILLIANCE AND PRESENCE CONTROLS

This versatile unit can be used either as a 2-way or 3-way 6 db. per octave network, simply by loosening a few screws on the rear terminal panel and shifting several wires. You can use this network for a 2-way system now, easily and quickly convert to 3-way later. Six crossover combinations are available—2-way crossover with 2000-3000 cycle or 5000 cycle crossover, and 3-way with crossover frequencies of 350 and 3000, 350 and 2000-3000, 700 and 2000-3000 or 700 and 5000 cycles—a total of four different crossover frequencies! Suitable for 8-16 ohm speakers. The network is housed in an attractive metal case, suitable for mounting inside enclosure or leaving out in the open. Two level controls—Brilliance and Presence controls—are mounted on the front panel. If desired, these level controls may be removed, along with the beautiful gleaming copper escutcheon plate, for external mounting; controls are wired with 3-foot long leads. High quality components are used for long life and top performance.

LN-3 Lafayette L/C Crossover ..... Net 14.95

# SENSATIONAL VALUES in Stereo Turntables and Changers

WHAT THE TECHNICAL PRESS\* IS SAYING ABOUT THE PK-245

Hi-Fi Review

"... of the highest caliber..."

"A good gage of a turntable is the freedom after the motor has been stopped. Freedom of movement permits the turntable to revolve under its own momentum. The model revolves about as long as any top-quality turntable we've tested - 135 seconds."

\*The technical staff of the publication carefully inspects and tests the unit. Their evaluation as to what the unit does, how it does it, and how it sounds, is based upon use in their laboratories.

high fidelity



High Fidelity

"... an excellent buy at a much higher price."

"The workmanship in the entire assembly is excellent - all parts are snugly assembled... Speed regulation was excellent. No wow or flutter was audible on any kind of musical material. Checks with a stroboscope disc indicated that, at all speed selector settings... was precisely on speed, and maintained this speed under the heaviest loads that would be imposed by a playback pickup."

## LAFAYETTE PROFESSIONAL TURNTABLE WITH AUTHENTIC HYSTERESIS SYNCHRONOUS MOTOR PERFECT FOR NEW STEREO & MONAURAL RECORDS

PROFESSIONAL 4-SPEED TURNTABLE WITH HYSTERESIS-SYNCHRONOUS MOTOR

The LAFAYETTE TRUE HYSTERESIS-SYNCHRONOUS MOTOR. Since many so-called "hysteresis" motors have appeared and will continue to appear on the market, it is important that you know the difference between the real thing, as provided by Lafayette, and the imitations with partial hysteresis motors.

THE LAFAYETTE TRUE HYSTERESIS SYNCHRONOUS MOTOR IS PERFECT FOR THE NEW STEREO AND MONAURAL RECORDS. THE FACT THAT THE NEW STEREO RECORDS CONTAIN VERTICAL MODULATION IMPOSES STRINGENT REQUIREMENTS ON TURNTABLES. THEY HAVE TO BE FREE FROM RUMBLE, FLUTTER, WOW AND SPEED VARIATION. THE LAFAYETTE TRUE HYSTERESIS SYNCHRONOUS MOTOR MEETS ALL THESE REQUIREMENTS WITH EFFORTLESS EASE, RESULTING IN SUPERIOR REPRODUCTION OF STEREO DISCS, AS WELL AS TREMENDOUS REDUCTION IN RECORD WEAR.

ONLY LAFAYETTE'S HYSTERESIS-SYNCHRONOUS MOTOR, in its price class, is made to extremely fine tolerances (on the order of .00001 inches)! Only Lafayette's motor has 16 cores, a high permeability rotor magnet, ball thrust bearings, all-steel bearings plus felt oil reservoir, cooling fins as an integral part of the rotor and a hollow rotor core for maximum efficiency and minimum heat. Only Lafayette's motor can be oiled from above, without disassembly, through a unique oil feed system. Only Lafayette's motor has a self-aligning armature.

ONLY LAFAYETTE CAN GIVE YOU A REALLY PROFESSIONAL TURNTABLE WITH TRUE HYSTERESIS-SYNCHRONOUS MOTOR AT SUCH AMAZINGLY LOW PRICES!

Here's THE turntable—the last word in professional high-fidelity performance! A fine precision instrument in every sense. Just look at some of these OUTSTANDING FEATURES:—WOW AND FLUTTER: Less than 0.2% • TURNTABLE: Heavy, diecast aluminum. Lothe-turned for perfect balance and concentricity. 12" diameter—weighs approx. 4 lbs. and provides amazingly constant speed; the extra-heavy rim acts just like a flywheel to prevent speed variations • TRUE HYSTERESIS-SYNCHRONOUS MOTOR: For smooth, low-noise, wow- and flutter-free operation • RUMBLE AND NOISE: 50 db below average recorded level • INTEGRATED SPEED CONTROL: For all 4 speeds—78, 45, 33 1/3 and 16 2/3 rpm • 2 OVERSIZE, HEAVY DUTY IDLERS: Precision-ground; provide positive constant-speed rim drive • SINGLE BALL THRUST BEARING: Turntable rides smoothly over ball bearing floating in a thin film of oil • FREE-FLOATING, SHOCK-MOUNTED MOTOR • RUBBER CUSHION SHOCKMOUNTS • AUTOMATIC IDLER DISENGAGEMENT • RUBBER MAT • STAINLESS STEEL PRECISION SPINDLE • POWER REQUIREMENTS: For 105-130 volts, 60 cps AC; draws 16 V.A. • ACCESSORIES SUPPLIED: 45 RPM adapter, Strabe disc • SIZE: 2 1/8" above and 4" below motor board; 14 1/4" deep x 12 1/4" wide • SHIPPING WEIGHT: 16 lbs.

LAFAYETTE MODEL PK-245W ..... 5.00 Down ..... Net 64.50

### LAFAYETTE MONEY-SAVER COMBINATIONS

(Base not included—see above for selection of woodbases)

COMBINATION WITH 16" ARM					COMBINATION WITH 12" ARM				
COMB. NO.	TURNTABLE	ARM	CARTRIDGE	SPECIAL NET	COMB. NO.	TURNTABLE	ARM	CARTRIDGE	SPECIAL NET
PK-424WX	PK-245	PK-280	GE VR 225	87.95	PK-425WX	PK-245	PK-270	GE VR 225	83.95
PK-427WX	PK-245	PK-280	E-V 31MD5	87.95	PK-429WX	PK-245	PK-270	Pickering 371A	85.95
PK-428WX	PK-245	PK-280	Pickering 371A	87.95	PK-431WX	PK-245	PK-270	E-V 31MD5	85.95

Average Shipping Weight of these combinations is 18 lbs. 5.00 Down

VALUE ~~129.50~~ ONLY 64.50  
SAVE OVER 50%  
5.00 DOWN



FOR COMBINATION OFFER SEE TABLE AT LEFT

## DELUXE WOODBASES AND MOUNTING BOARDS FOR TRANSCRIPTION TURNTABLES

NET

14.95



- FINEST SELECTED HARDWOOD VENEERS
- CHOICE OF FIVE CABINETMAKER FINISHES
- FREE-FLOATING FOAM RUBBER MOUNTED MOTOR BOARD
- INDIVIDUAL ADJUSTABLE FEET FOR ACCURATE LEVELLING

These substantial woodbases are deluxe units made from the finest selected hardwood veneers by skilled craftsmen. All four sides are 3/4" thick and the top is 1/2". All have firmly secured mitered corners. The four bumper feet are individually adjustable for accurate leveling. The free floating mounting board is foam rubber mounted and the top has a finish matching the woodbase. Available in five attractive cabinetmaker finishes: mahogany, blonde, ebony, walnut and fruitwood; please specify when ordering. The elegant styling and finish add beauty to any high fidelity installation. Accommodates a turntable and a 12" or 16" tone arm. Size, 21 1/2" x 16 1/2" x 4 3/8". Shpg. wt., 15 lbs. Base and board cut for Lafayette PK-245 turntable. PK-265W ..... Net 14.95 Base and board cut for Lafayette PK-240 turntable. PK-266W ..... Net 14.95 Base and board uncut for mounting other makes of turntables. PK-267W ..... Net 14.95 Base and board for Lafayette PK-331 turntable. PK-335W ..... Net 14.95 Precut, unfinished, smoothly sanded mounting boards for Lafayette turntables. Ready for easy finishing. Size 15 1/2" x 20 1/2" x 1/2". Shpg. wt., 3 lbs. PK-268W. Cut for Laf. PK-245 turntable ..... Net 3.75 PK-269W. Cut for Laf. PK-240 turntable ..... Net 3.75

## NEW! Lafayette VISCOUS-DAMPED STEREO TONE ARM — THE PROFESSIONAL 12" PK-905



- JEWEL BEARING SUPPORT
- INSTANT PLUG-IN CARTRIDGE CHANGE
- AUTOMATIC FLUID CONTROL
- PERFECT RECORD TRACKING
- ACCOMMODATES MOST STEREO & MONAURAL HIGH FIDELITY CARTRIDGES

This Stereo/Monaural transcription arm assures dependable and stable operation, utilizing the floating-action principle of viscous-damping. The arm is supported at a single point by a pivot and jewel bearing which negligible friction. Damping is accomplished by a silicone fluid occupying the gap between a ball and socket. This damping control permits high compliance and negligible tracking error and prevents damage to either record or stylus should the tone arm be accidentally dropped. Low frequency resonance, skidding and groove-jumping are likewise minimized. The tone arm accepts all records up to 12" and accommodates virtually all Stereo or Monaural hi-fi cartridges by means of precisely engineered adapters which simplify installation and provide proper stylus pressure. The arm has a decorative glassy-black finish. Overall length is 12"; height adjustable from 1/4" to 2 1/4" above motorboard; round mounting base is 2 1/4" in diameter. Shpg. wt., 2 1/2 lbs. PK-905—12" VISCOUS-DAMPED STEREO TONE ARM Net 12.50

PK-240 ONLY 37.50



FOR COMBINATION OFFER SEE TABLE AT RIGHT

## LAFAYETTE 4-SPEED PROFESSIONAL TRANSCRIPTION PLAYER WITH 3 LB. 12" ALUMINUM TURNTABLE

- IDEALLY SUITED FOR STEREO! • BETTER THAN -50 DB RUMBLE & NOISE • VIBRATIONLESS MOTOR SUSPENSION • BELOW 0.2% WOW & FLUTTER • MAGNETIC EDDY-CURRENT BRAKE
- 3 LB. 12" BALANCED & MACHINED ALUMINUM TURNTABLE • SPEED CONTROL FOR ± 7% VARIATION OF EACH SPEED

An amazing low price for the superior quality embodied in this fine instrument. Features include heavy, rim-weighted, 3 lb. machined-aluminum 12" turntable, magnetic brake with speed control for ± 7% variation of each speed; the extremely low noise and rumble figure of -50 db below average recorded level; wow and flutter (speed variations) of less than 0.2%; new-type oversize precision-ground idler with special lubrication features; positive-locking detents on 4-speed single-knob speed selector; "off" positions between all speed positions; free-floating shock-mounted motor; automatic idler disengagement in "off" positions; precision spindle turns on single ball bearing; heavy duty 4-pole induction motor. Heavy rubber turntable mat. For 105-120 volts, 60 cps AC; draws 0.13 amperes. Size of motor plate 11" x 10" x 1 1/2"; requires 4" below motor board, 1 1/2" above. Complete with stroboscope disc, 45 rpm adapter, AC line cord. Shpg. wt., 14 lbs.

PK-240 w 12" TRANSCRIPTION TURNTABLE ..... 2.00 Down ..... Net 37.50

### LAFAYETTE SUPER-VALUE COMBINATIONS

Save on these combinations of Lafayette turntables, arms and nationally famous stereo diamond cartridges. For selection of wood bases see above

COMB. NO.	TURNTABLE	TONE ARM	CARTRIDGE	SPECIAL NET
PK-411W	PK-240	PK-270	GE VR-225	61.50
PK-412W	PK-240	PK-270	Pickering 371A	61.50
PK-413W	PK-240	PK-270	E-V 31MD5	61.50
PK-415W	PK-240	PK-280	GE VR-225	63.50
PK-416W	PK-240	PK-280	Pickering 371A	63.50
PK-417W	PK-240	PK-280	E-V 31MD5	63.50

Average shipping weight of these combinations is 18 lbs. 5.00 Down

## THE REVOLUTIONARY NEW LAFAYETTE VERTICAL-LATERAL KNIFE-EDGE 12" & 16" STEREO TONE ARMS!

- 4 HARDENED-STEEL KNIFE-EDGE PIVOTS & BEARINGS FOR COMPLETE, PRACTICALLY FRICTIONLESS, FREEDOM OF MOTION
- LIGHTWEIGHT, DIE-CAST ALUMINUM TONE ARM
- EQUIPPED WITH UNIVERSAL PLUG-IN SHELL FOR ALL POPULAR STEREO CARTRIDGES
- SELF-CONTAINED BUBBLE LEVEL FOR PERFECT, GUESS-FREE LEVELLING
- PRECISELY-ADJUSTABLE COUNTERBALANCE WEIGHT
- NON-RESONANT WITHIN THE AUDIBLE FREQUENCY RANGE
- PERFECT TRACKING WITH THE LIGHTEST STYLUS FORCE

### RUGGED CONSTRUCTION — FOOLPROOF — TROUBLE FREE

A remarkable advance in tone arm design is presented in these new Lafayette tone arms. An unusual new principle, utilizing 2 vertical and 2 lateral hardened-steel knife-edge pivots supported by hardened steel bearings, provides extremely low horizontal and vertical friction. This unusual type of bearing provides minimum waveform distortion and no undesirable motion or loose-jointed action as viewed from the stylus end. Groove tracking is smooth, with excellent tracking even with very light pickup weight, due to the absence of frictional losses. Friction in horizontal and vertical directions is low, but mechanical impedance is high at 45°, providing maximum effectiveness with 45-45 stereo cartridges. The unique knife edge bearing construction makes it possible to draw out the shielded cable from the center of the support column, eliminating "stiffness friction" due to the cable. A highly precise bubble level is provided at the top of the support column; the bubble plus 3 adjustments on the base, provide perfect levelling. Height of the arm is adjustable from 1 1/8" to 2 1/8" above motorboard. Overall length of the PK-270 12" arm is 13". Linear distance from support column to stylus tip is 10-5/16"; the PK-280 16" arm is 14 1/4" overall, effective length is 11-13/16".


PK-270 Lafayette 12" Tone Arm. Shpg. wt., 1 1/2 lbs. Net 17.50  
PK-280 Lafayette 16" Tone Arm. Shpg. wt., 2 lbs. Net 19.50

## LAFAYETTE COMPLETE STEREO TRANSCRIPTION PLAYER



- 5-CONTACT PLUG IN HEAD FOR ALL STEREO CARTRIDGES • 4-SPEED, HEAVY DUTY 4-POLE TRANSCRIPTION TYPE INDUCTION MOTOR • MAGNETIC BRAKE FOR ± 7% SPEED ADJUSTMENT • STYLUS WEIGHT ADJUSTMENT SCREW ON TONE ARM • RUMBLE AND NOISE — 40 DB • LESS THAN 0.3% WOW

This top quality manual player features a 5-contact plug in head to accommodate the latest stereo as well as monaural cartridges. The lightweight tone arm is an integral part of the mounting plate and requires no installation. The new 4-speed turntable assembly is equipped with a quiet, heavy duty 4-pole motor, with an exclusive magnetic brake for instantaneous fine adjustment of each speed. Stroboscope disc also included. Smooth operation is assured further by the 10" heavy turntable, fitted with rubber mat. Provision for easy adjustment of stylus pressure is available. Dimensions of mounting plate 12-15/16" left to right, and 10 1/2" front to rear. Requires 2 1/4" below and 3" above motorboard. For 105-120V, 60 cps. Accessories included: 45 rpm adaptor, output cable and plug in heads. Shpg. wt., 14 lbs. PK-1605W—Complete stereo transcription player, less cartridge 2.00 Down Net 26.95 PK-438W—Same as above, but with new GE VR 225 stereo cartridge with diamond stylus. 2.00 Down 39.95 PK-162W—Wood base for above, in mahogany or blonde (Please Specify). Shpg. wt., 5 lbs. Net 3.95 PK-163W—Unfinished mounting board for above. Strong durable 3/4" gumwood. (Shpg. wt., 1 lb.) Net .95

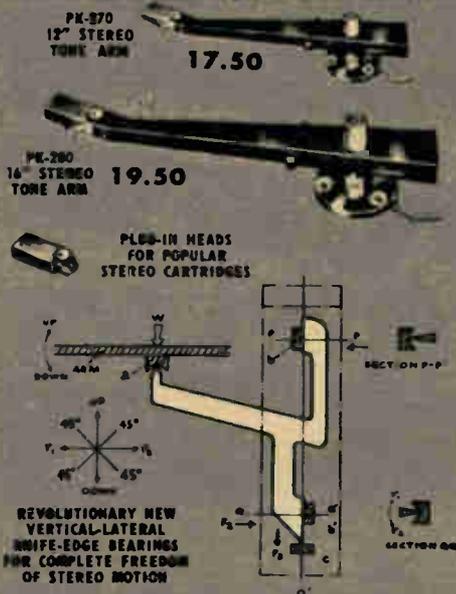

# LAFAYETTE **SCOOPS** the Tape Recorder Industry!



Never Before Such Exceptional **QUALITY** and **VALUE!**



**54.50**

**ONLY 5.00 DOWN**

- Completely Portable—Carry it Anywhere!
- Two Speeds— $3\frac{3}{4}$  or  $7\frac{1}{2}$ " Per Second
- Uses Standard 5" Reel • Frequency Response 60-8,500 C.P.S.

LAFAYETTE LEADS THE AUDIOD WORLD WITH THIS FANTASTIC TAPE RECORDER BUY. Indeed we can honestly say there has never been a tape recorder value that compares to this remarkable instrument... Perfect for home, school or office. At home, the RK-400 proves ideal for parties or recording your favorite musical performance. Use it at school for lectures, notes or voice training. In the office its small size lends itself ideally for dictation or sales presentations. Handy fool-proof operation has been provided by a single rugged function control (reverse, stop, play and record) and separate on/off volume control. Speeds are adjustable from  $3\frac{3}{4}$ " to  $7\frac{1}{2}$ " per second by a simple capstan adjustment. At  $3\frac{3}{4}$  ips the RK-400 provides up to one hour of recording time on a standard 600 ft. 5" reel of tape. Special 5" heavy duty permanent magnet speaker furnishes an exceptionally fine tonal quality. Record level indicator light facilitates recording by showing you when volume control is correctly set. Jacks are provided for microphone, phono and extension speaker (special alligator clip cord is supplied). Complete with sensitive crystal microphone. Finished in attractive scuff resistant pyroxylin material. Dimensions:  $11\frac{1}{4}$ " x  $9\frac{7}{8}$ " x  $7\frac{1}{8}$ ". For 110 volts 50-60 cycles. Shpg. wt., 20 lbs. RK-400 ..... 5.00 Down ..... Net 54.50



**600 FT. TOP QUALITY RECORDING TAPE ON HIGH-STRENGTH 5" PLASTIC REEL**

600 ft. acetate on 5" reel

**99¢**

Splice-free acetate base recording tape made by famous tape manufacturer to meet the most critical requirements. Uniformly coated with red oxide on acetate plastic base for high output and uniform frequency response.

RT-17 Shpg. wt., 8 oz. . . . Singly, Ea. .99  
Lots of 5, Ea. . . . . .90

**PORTABLE**  
YOUR ENTERTAINER AND  
COMPANION AT HOME AND ABROAD

**BATTERY OPERATED  
TRANSISTORIZED TAPE RECORDER**

**GRUNDIG**

**69.95**

BATTERIES INCLUDED



- TRULY PORTABLE — WEIGHS ONLY 5 LBS!
- 4 TRANSISTOR AMPLIFIER WITH PUSH PULL OUTPUT!
- DUAL TRACK RECORDING!
- STANDARD  $3\frac{3}{4}$ " SPEED!
- ALL THE FEATURES OF A FULL-SIZE MACHINE!

Here is a truly PORTABLE transistorized tape recorder weighing ONLY 5 lbs. yet having all the features of a full-sized recorder. Precision-built with customary Grundig craftsmanship, this machine features dual-track recording and playback, recording level control, fast rewind, volume control, microphone amplifier and push-pull output. Its light weight and compact size permit it to be carried anywhere. Ideal for

executives, professionals, salesmen, reporters, at the office, home or en route! This remarkably versatile unit is offered by Lafayette—AT THE LOWEST PRICE ANYWHERE! Size  $11$ " x  $6\frac{3}{4}$ " x  $3\frac{1}{2}$ ". Shpg. wt. 5 lbs. with batteries 5.00 Down  
RK-106WX Portable Transistor Tape Recorder Net 69.95  
EXTRA BATTERIES.  
BA-174 Eveready 1015 (2 required) Net ea. .13  
BA-157 Eveready 950 (4 required) Net ea. .13

**LAFAYETTE "TRANSCORDER" TRANSISTORIZED PROFESSIONAL POCKET TAPE RECORDER**

Record-Playback Anywhere For Only Pennies Per Hour . . . For Executives, Salesmen, Professionals, Travelers and Hobbyists

**189.50**



Weighs only 3 pounds — size  $8\frac{1}{2}$ " x  $3\frac{3}{4}$ " x  $1\frac{7}{8}$ " — take it anywhere — in your briefcase or slung over your shoulder. As simple to operate as a camera — only 3 controls; ON-OFF — PLAY — RECORD — volume. Completely transistorized. The only pocket tape recorder that operates on one battery. Records and plays back for one full hour at  $1\frac{1}{2}$ " per second tape speed. Slip in recording tape cartridge eliminates tape threading. Records and plays back with amazing fidelity and sensitive microphone picks up conversation as far as 30 feet away! Manual rewind is fast (less than 2 minutes), simple, economical and foolproof! The high-fidelity Mylar tape is erasable and can be used over and over again indefinitely. Recordings can be monitored while they are being made. Visual battery life indicator. Recording time indicator shows at a glance the remaining recording time. Play back through microphone or add the transistorized power amplifier and 2-inch speaker (separately supplied) which fits into the battery compartment. Complete with combination microphone-playback speaker—one hour tape recording cartridge and 12-hour battery. Attractive two-tone baked enamel finish. Shpg. wt., 4 lbs.

RK-425WX List 249.50 ..... 5.00 Down ..... Net 189.50

For additional "Transcorder" Accessories see pg. 85 in Lafayette Catalog 600.

**New! LAFAYETTE  
RK-103 DUAL  
SPEED TAPE  
RECORDER**

PAGE-SETTING QUALITY

AT **99.50**

5.00 Down

CHECK THESE FEATURES!

- ✓ PUSH-BUTTON CONTROLS
- ✓ DUAL SPEED —  $7\frac{1}{2}$  &  $3\frac{3}{4}$ " PER SECOND
- ✓ TWIN SPEAKERS
- ✓ TAPE LUDEX COUNTER
- ✓ SIGNAL TO NOISE RATIO BETTER THAN 40 db
- ✓ WOW AND FLUTTER LESS THAN 0.35%
- ✓ DUAL TRACK
- ✓ RESPONSE 50-13,000 cps
- ✓ POWERFUL 5 WATT AMPLIFIER

One of the finest tape recorder values Lafayette has ever offered. A perfect instrument for the entire family . . . fine for home, school or office. At home the RK-103 is ideal for parties or recording your favorite musical performances. Use it at school for lectures, notes or voice training. In the office the RK-103 is excellent for sales presentations or dictation.

Handy, fool proof operation has been accomplished by utilizing rugged push-button controls for play, record, rewind, forward and stop. Automatic interlocked switching makes it impossible to accidentally erase, spill or break tape. Dual speeds— $7\frac{1}{2}$  and  $3\frac{3}{4}$  ips are incorporated along with dual track facilities, thus providing great versatility with tape economy. Tape-index counter allows precise pinpointing of any portion of tape. Record level indicator light facilitates recording by showing you when volume control is correctly set. Fast forward and rewind—1200' in 80 seconds. Accepts 7" reel size. Twin matched speakers (one on each side of recorder) coupled with an excellent 5 watt amplifier provide amazing tonal quality from 50 to 13,000 cps dispersing sound over a 360° area. Provision for connecting to external speaker and external amplifier. Input jack for recording from your Radio-Phono or T.V. Attractively finished in black and white scuff-resistant pyroxylin material. Complete with microphone. 600 ft. of tape and extra reel. Dimensions are  $14$ " H x  $14$ " W x  $10$ " D. Shpg. wt.  $33\frac{3}{4}$  lbs. For 115 volts 60 cycles AC.


RK-103 WX ..... 5.00 Down ..... Net 99.50

# Announcing THE FABULOUS NEW Lafayette

Brought To You By Lafayette Research — Engineered To Set A New Standard Of Speaker System Excellence




PATENTS APPLIED FOR IN UNITED STATES, ENGLAND AND CANADA

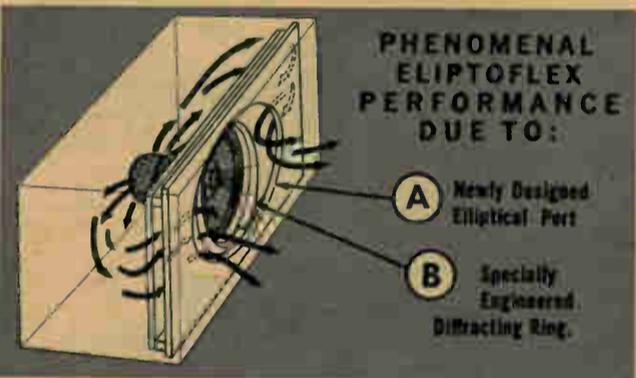

### PERFORMANCE EXPLANATION

The loudspeaker is mounted on a baffle recessed in the cabinet shell with the front plate extending partially across the front surface of the baffle forming ducts or tubes from the port openings to the outside air. The elliptical cutout changes the effective length of the duct across its area. This variation in path lengths provide an extremely smooth transition from duct to free air; broadens the frequency response and provide better transient response. A triangular shaped diffracting ring mounted on the front of the baffle board virtually eliminates undesirable cancellation effects normally produced by close coupling of front and rear cone radiation. This results in a "lens" effect, changing relative particle velocities and consequently, phase relationships so as to produce a smooth transition from front to rear radiation. Comparative laboratory and listening tests indicate that "Eliptoflex" performance is demonstratively superior throughout the audio spectrum.

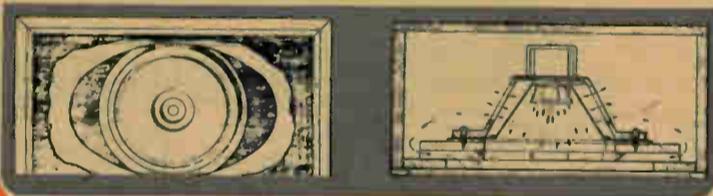

FRONT VIEW

SIDE VIEW

# 64.50

ONLY 5.00 DOWN

FINISHED ON 4 SIDES

Adapts to any room arrangement. Place horizontally on shelves or vertically on the floor.

NOW IT IS POSSIBLE TO HAVE ALL THE ADVANTAGES OF A HIGH EFFICIENCY 12" SPEAKER IN A BOOKSHELF SIZE ENCLOSURE.

- SPECIALLY DESIGNED 12" COAXIAL SPEAKER WITH SHEEPSKIN CONE EDGE SUSPENSION AND 1 1/4 LB. MAGNET PROVIDE A RESPONSE FROM BELOW 30 TO 15,000 CPS.
- ENCLOSURE BEAUTIFULLY FINISHED ON FOUR SIDES IN HAND RUBBED VENEERS.

The "Eliptoflex" is the result of an intensive research program whose 3-fold purpose was to:

- Develop a speaker system that would meet the space requirements of stereo.
- Utilize the full advantages of efficient 12" speaker performance.
- Provide optimum performance without the use of large wattage expensive amplifiers.

The Results Were Remarkable... The Eliptoflex utilizes a unique elliptical port which broadens frequency response and provides better transient response. A specially engineered diffracting ring eliminates cancellation effects between front and rear radiation. These engineering advances are coupled with the famous Lafayette free edge SK-58 12" coaxial speaker with 3" cone type tweeter, 1 1/4 lb. TSK-5 high-flux density magnet special 3/4" wide sheepskin cone-edge suspension and built-in and crossover network level control.

"Eliptoflex" achieves a degree of natural smoothness, low distortion and rich robust bass hitherto found only in large enclosure speaker systems or inefficient bookshelf speakers many times its price requiring high powered amplifiers. Due to its highly efficient design characteristics the "Eliptoflex" does not require costly high wattage amplification.

The "Eliptoflex" speaker system is beautifully finished on 4 sides in a variety of hardwood veneers for attractive room placement either horizontally or vertically. Dimensions are 14"H x 23-7/16"W x 13-5/16"D. Shpg. wt., 35 lbs.

SY-381WX "Eliptoflex" Speaker System (Mahogany).....	Net 64.50
SY-382WX "Eliptoflex" Speaker System (Walnut).....	Net 64.50
SY-383WX "Eliptoflex" Speaker System (Blonde).....	Net 64.50
SY-384WX "Eliptoflex" Speaker System (Oiled Walnut).....	Net 64.50
SY-392WX "Eliptoflex" Speaker System (Unfinished furniture grade birch)	Net 59.50
Set of attractive Wood Runner Feet attaches on horizontal or vertical sides. Adds 1" height, Shpg. wt., 1 lb.	
CAB-44W (Mahogany).....	Net 1.45
CAB-45W (Walnut).....	Net 1.45
CAB-46W (Blond).....	Net 1.45



## NEW! LAFAYETTE SK-125 HI-COMPLIANCE 3-WAY SPEAKER SYSTEM

8" Woofer - 6 1/2" Mid-Range - 2 1/2" Tweeter



COMPLETELY ASSEMBLED INCLUDES 3-WAY CROSSOVER NETWORK

# 49.50

- VARIABLE BALANCING CONTROL
- FREQUENCY RESPONSE FROM BELOW 35 TO 18,000 CPS
- SOLID VENTED, DUCTED-PORT TYPE ENCLOSURE
- FINISHED ON 4-SIDES FOR SHELF OR FLOOR PLACEMENT
- PERFECT FOR STEREO

Lafayette has succeeded in achieving a standard of performance formerly associated only with very large speaker systems. This complete 3-way speaker system, incorporates advanced Hi-Compliance speaker design in an extra rigid vented, ducted-port type enclosure, lined throughout with acoustic material. The natural, full bass, faithful mid-range and clear sparkling highs are startling from a speaker system of such small proportions. Employing a 3-way LC crossover network with a variable 10-position balancing control, it is possible to match the speaker system to individual room acoustics and listening tastes. Frequency response is from below 35 to 18,000 cps. with a power handling capacity of 25 watts. Impedance 8-16 ohms. Finished on all 4 sides in attractive hand-rubbed mahogany or walnut veneers (please specify). Dimensions are 24"W x 11"H x 10 1/4"D. Shpg. wt., 26 lbs.



SK-125WX HI-COMPLIANCE 3-WAY SPEAKER SYSTEM	2.00 Down	Net 49.50
SET OF 2-SK-125WX SPEAKER SYSTEMS FOR STEREO	5.00 Down	Net 98.00

## New LAFAYETTE ULTRA-COMPLIANCE MECHANICAL 2-WAY SPEAKER SYSTEM

- ESPECIALLY DESIGNED VENTED, TUNED, DUCT TYPE ENCLOSURE
- UNIQUE MECHANICAL 2-WAY SPEAKER WITH EXTRA HEAVY MAGNET
- BEAUTIFULLY FINISHED ON 4 SIDES
- EXCELLENT FOR STEREO
- ONLY 10 3/4" H x 18 3/8" L x 8 3/8" D

# \$17.50

OUTPERFORMS SPEAKERS DOUBLE LAFAYETTE'S LOW PRICE



COMPLETELY ASSEMBLED



SK-124WX MECHANICAL 2-WAY SPEAKER SYSTEM	Specify Finish	Net 17.50
SET OF TWO SK-124WX SPEAKER SYSTEMS FOR STEREO	2.00 Down	Net 34.00

Lafayette has indeed wrought a small miracle in engineering such acoustic excellence into so small a package. Smooth, distortion free response with a deep fundamental bass and clean pure highs that give no indication of its small size and price. The perfect speaker for that high quality installation in your home, office or restaurant—two are ideal for stereo. The speaker features unique dual cone construction with extra heavy magnets. Both tweeter and woofer "float" on flexible, corrugated edges with the outer edge of the tweeter cone attached to the mid-section of the woofer cone. This results in a mechanical crossover so that both cones operate in phase at low frequencies, but only the tweeter cone operates at high frequencies. The same type of wide-range frequency response normally found only in true coaxial or multiple speaker systems is provided. Frequency response of 40-16,000 cps. Impedance 8-16 ohms. Cabinet is finished on 4-sides in hand-rubbed mahogany and walnut for attractive horizontal or vertical placement anywhere in the room. Dimensions are 10 3/4" H x 18 3/8" L x 8 3/8" D. Shpg. wt., 15 lbs.

# AN EXCITING NEW SPEAKER DEVELOPMENT



## New! Lafayette COMPRESSION- HORN TWEETER

- RESPONSE 1500-16,000 CPS
- 20 WATTS • EXPONENTIAL HORN
- FOR 2-WAY, 3-WAY OR 4-WAY SPEAKER SYSTEMS
- WIDE-ANGLE DISPERSION OF HIGHS
- FOR TOP OR IN-CABINET MOUNTING

ONLY **8.95**

A high quality compression-driver tweeter with a frequency response of 1500-16,000 cps and a continuous duty rating of 20 watts. Vertical positioning of the mouth of the exponential horn provides widest dispersion of high frequencies at ear-height. With chrome-plated fork-type swivel base. Flux density is a high 13,500 gauss for greatest efficiency; crossover range is 2800 cps or higher, with 4000-5000 cps recommended for 3-way systems; the wide, smooth response range permits it to be used with 2-, 3-, or 4-way speaker systems. The exponential horn is a heavy, one-piece casting non-resonant within the audible frequency range. Voice coil impedance is 8-16 ohms. Chrome-plated screw terminals for easy connections. Overall height with swivel stand is 4 1/4"; width 2 1/4"; behind-panel mounting requires a rectangular cutout (long axis vertical) 1 3/4" x 4-3/16". Shpg. wt., 3 lbs. SK-105 Compression-driver Horn Tweeter .....Net 8.95

## 2 OR 3 WAY CROSSOVER NETWORK



- 4 CROSSOVER FREQUENCIES
- 1 PAD BALANCE CONTROLS
- EASY TO USE
- IMPEDANCE 16-OHMS

**8.75**

The LN-7 Crossover Network combines quality performance, beauty and versatility at an unbeatable price. It can be used in a two-way system by crossing over at 500 cps or 3300 cps, and in a three-way system by utilizing the two simultaneously. The change from a 2-way to a 3-way 6 db per octave network may be accomplished easily. Complete with two level balance controls. Size: 5 1/2" x 2 1/4" x 2 1/4". Shpg. wt., 2 1/2 lbs. LN-7 .....Net 8.75

## SPECIAL COMBINATION



### FAMOUS LAFAYETTE-GOODMAN 15" 3-WAY SPEAKER WITH HIGHBOY OR LOWBOY CABINET

AS LOW AS  
**79.50**  
5.00  
DOWN

Now you can obtain what is conceded to be the greatest performance value on the hi-fi market—and save up to 29.50. Available with either SK-111 15" 3-way speaker with 1 1/2 lb. magnet or SK-113 3-way with 3 1/2 lb. magnet. These are both highly efficient integrated 3-way speakers made by world renowned Goodmans of England. Supplied complete with genuine 12 db/octave crossover network with L-pad high frequency level control.

The enclosure is the renowned Lafayette bass reflex in either highboy or lowboy styling and in a choice of mahogany, walnut or blonde. Solidly constructed of 3/4" stock, these units have picture frame moldings, attractive plastic grilles, tapered legs, brass ferrules, internal acoustic linings, and are finished in genuine wood veneers. Size of lowboy (less legs) 28 1/2" w x 23 1/2" h x 16 1/4" d. Same size for highboy with height and width interchanged.

WHEN ORDERING, SPECIFY CHOICE OF BOTH: STYLE — HIGHBOY OR LOWBOY FINISH — MAHOGANY, BLONDE, WALNUT

SY-281WX SK-111 15" with 1 1/2 lb. magnet 3-WAY SPEAKER & ENCLOSURE COMBINATION—Net 79.50 Only 5.00 Down  
SY-338WX SK-113 15" with 3 1/2 lb. magnet 3-WAY SPEAKER & ENCLOSURE COMBINATION—Net 89.50 Only 5.00 Down

## COMPRESSION HORN TWEETER WITH 2 OR 3 WAY CROSSOVER



Versatility is the byword in this combination of the famous Lafayette SK-105 tweeter and LN-7 crossover. The Lafayette LN-7 6 db per octave crossover may be utilized as a 2-way at 500 cps or 3300 cps now—and in the future, by the addition of a mid-range speaker, it will become a 3-way, crossing over at 500 cps and 3300 cps. Rated at 20 watts of continuous power the Lafayette SK-105 tweeter will extend system response up to 16,000 cps. The very high flux density of 13,500 gauss guarantees excellent efficiency and essentially flat frequency response. Ruggedly built from a one-piece casting and carefully designed to eliminate unwanted resonance in the audio range, its attractive styling permits mounting on top of the speaker enclosure or, optionally, within the enclosure. Impedance 8-16 ohms. Shpg. wt., 5 1/2 lbs.

SY-344—Combination Tweeter and Crossover System Net 14.50

# Lafayette Presents

## THE NEW ULTRA-LINEAR SK-128

**19.50**

### FULL RANGE 8-INCH BIAxIAL SPEAKER WITH NEWLY

### DEVELOPED TWEETER BAFFLE DESIGN.




- 40 TO 16,000 CPS—FLAT WITHIN 3 DB
- HIGH EFFICIENCY
- HIGH EXCURSION WOOFER WITH UNIQUE "CONICAL STIFFENER"
- HANDLES HEAVY BASS PASSAGES WITHOUT "DOUBLING"

### *Eccentric Tweeter Mounting & Unique Elliptical Baffle Completely Eliminates Interaction Between Woofer & Tweeter*

The SK-128 combines the best features of a multiple speaker system in one compact and economical unit. It offers full, even coverage of the entire audible range, with no distortion or coloration to mar your listening pleasure. The specially treated woofer cone has a unique "Conical Stiffener" at the apex which, coupled with its high compliance, enables the cone to operate in a piston-like manner—delivering a clean, powerful bass response. The 2-inch tweeter has its own voice coil and magnetic field. Special treatment of cone and cone edge provides even distribution of the high frequencies, with no peaks or resonances. The unusual off-center mounting of the tweeter and its elliptical baffle minimizes interaction between tweeter and woofer and insures an overall response free of intermodulation distortion. Electrical crossover from the woofer cone to the tweeter unit is provided by a

built-in network. An adjustable brilliance control permits matching of sound to room acoustics. Efficiency of the speaker is such that it will operate from any amplifier with an output of 1 watt or more. Installed in a bass-reflex type of enclosure, it performs outstandingly, and is recommended for all high-quality music systems—whether monaural or stereophonic. SPECIFICATIONS: Overall Response: 20-20,000 cps (40-16,000 cps  $\pm$  3 db). Free air Resonance: 45-65 cps. Impedance: 8 ohms. Power Rating: 20 watts Integrated Program Material. Crossover: 2,500 cps. Overall Diam. 8-5/32". Overall Depth: 5-17/32". Baffle cut-out: 7-1/32". Rugged, vibration-free speaker frame with color-coded screw-type terminals for quick, easy connection of amplifier leads. Shpg. wt., 5 lbs. SK-128 Full Range 8" Biaxial Speaker .....Net 19.50

Delivery approximately Feb. 27, 1960

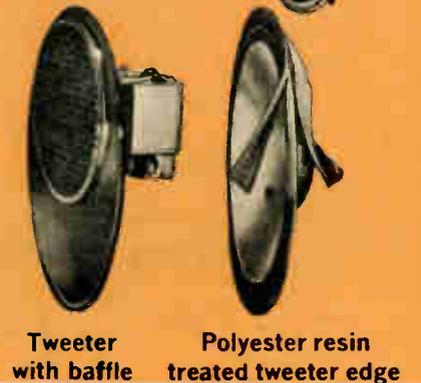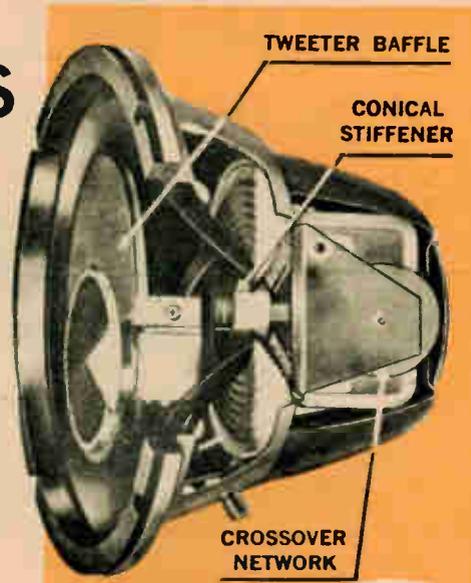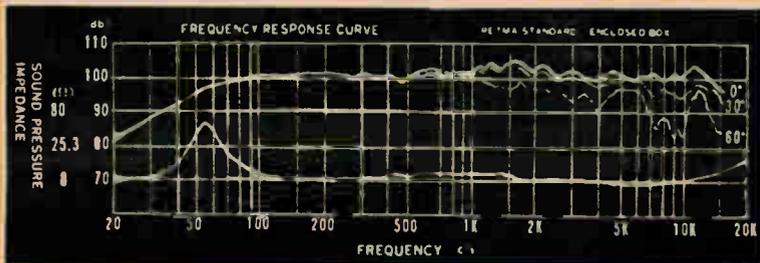

### LAFAYETTE MINI-DUCT BOOKSHELF ENCLOSURE WITH SK-128 8" ULTRA-LINEAR SPEAKER

The perfect answer for those who demand realistic sound reproduction even where space is limited. Two of these systems are ideal for stereo. Shpg. wt., 28 lbs. 2.00 Down

- SY-343WX Speaker System In Walnut .....Net 39.50
- SY-344WX Speaker System In Mahogany .....Net 39.50
- SY-345WX Speaker System In Blonde .....Net 39.50
- SY-346WX Speaker System In Oiled Walnut .....Net 39.50
- SY-347WX Speaker system in unfinished birch .....Net 37.50



# THE WIDELY ACCLAIMED SK-58 12" COAXIAL SPEAKER Now Offered Exclusively By Lafayette At Tremendous Savings

SUPERB PERFORMANCE GUARANTEED  
—OR YOUR MONEY BACK!

## THE WORLD-RENOWNED Lafayette SK-58

- RESPONSE 30-15,000 CPS
- SHEEPSKIN "FREE EDGE" CONE MOUNTING
- 1 1/4 LB MAGNET WEIGHT
- 3" COAXIALLY MOUNTED TWEETER
- BUILT-IN LC NETWORK
- RATED AT 20 WATTS CONTINUOUS POWER

COMPARABLE VALUE ~~44.50~~

**29.50**



Lafayette's exclusive 12" coaxial is a precision-made high fidelity loudspeaker, universally acclaimed by music lovers, hi-fi enthusiasts and professional experts alike as the greatest performance-value on the hi-fi market. It provides a truly faithful reproduction of sound without any "coloration" or distortion, its excellence being responsible for its use in innumerable high fidelity music systems today. The SK-58 incorporates such features as heavy, high flux density TSK-5 magnets for high efficiency; 3/4" wide sheepskin cone-edge suspension and special composition fibre cone material, specially treated for ultra-linear, distortion-free response; heavy rugged cast metal frame for freedom from resonances and for greater rigidity.

The coaxially-mounted 3" cone-type tweeter has a bell shaped mounting for maximum dispersion of high frequencies with no back radiation. With the built-in 3000 cps crossover network it contributes its share to the smooth delivery of the overall wide range response of 30-15,000 cps. Woofer resonance in free air is 40 cps. Speaker power handling capacity is 20 watts continuous sine wave, 35 watts peak program material. Impedance of the voice coil is 8 ohms, connections being made to chrome-plated screw terminals. Finished in gray-brown apaltescent enamel, the speaker is supplied complete with "brilliance" level control. Shpg. wt., 11 lbs. SK-58 12" COAXIAL SPEAKER ..... 2.00 Down .....Net 29.50

# NEW! REVOLUTIONARY HIGH-FREQUENCY SPEAKER

## THE NEW LAFAYETTE HIGH FREQUENCY SUPER TWEETER



THE MOST SIGNIFICANT ADVANCE IN TWEETER DESIGN OF THE STEREO AGE

SK-131




19.50

At long last the breakthrough in High-Frequency Speaker design. Here is a tweeter with unequalled performance, engineered for today's high compliance stereo speaker systems. The Lafayette Sphericon represents a complete departure from Electrostatic tweeters, which are extremely inefficient — indeed so much so that it is often necessary to utilize an L-pad on the woofer in order to hear the tweeter properly, thereby lowering the efficiency of the woofer to the same level as that of the Electrostatic tweeter. In the case of many high compliance low effi-

ciency units this is disastrous, as an already inefficient speaker is made even less efficient. The Lafayette Sphericon, due to its high sensitivity may be coupled to any speaker system with no loss in speaker efficiency. As a result less amplification is needed assuring lower distortion. Equipped with a built-in 3000 cycle crossover network the Sphericon produces a smooth linear response from 3,000 cps to beyond 40,000 cps; within plus or minus 1 db from 3000 cps to supersonic frequencies. A specially designed domed phenolic diaphragm delivers

phenomenally smooth, silky, faithful high radiating a pattern of 120° in all directions, vertically as well as horizontally—with no trace of stridency or harshness. Power capacity is 30 watts. May be used with any 4-16 ohm speaker. Beautifully styled with an acoustically designed gold anodized aluminum grill set in a sturdy satin black plastic case. Shpg. wt., 3 1/2 lbs. LAFAYETTE SPHERICON SUPER TWEETER — For High Efficiency Speaker Systems. Net 19.50



### ELECTROSTATIC 3 ELEMENT TWEETER

WAS 27.50 NOW ONLY 17.50



SK-150 Mahogany finish  
SK-151 Walnut Finish  
SK-152 Blonde Finish  
(Please specify finish) Shpg. wt., 7 lb. Net 17.50

### RECOMMENDED INSTALLATION ACCESSORIES

Select crossover networks and L pads to match impedance

**CROSSOVER NETWORK KITS**  
Consists of coils and condensers and detailed assembly instructions. Shpg. wt., 2 lbs.  
KT-128—8 ohm crossover kit (for AR-1, AR-2 & KLH-6) Net 2.75  
KT-129—16 ohm crossover kit (for KLH-4) Net 2.75

**LAFAYETTE "L" PAD ATTENUATORS**  
VC-49—8 ohm (for AR-2 & KLH6) Shpg. wt., 6 oz. Net 1.49  
VC-50—16 ohm. Shpg. wt., 6 oz. Net 1.49

SPHERICON DESIGNED SPECIFICALLY FOR MEDIUM AND LOW EFFICIENCY SPEAKER SYSTEM: This is essentially the same as the SK-131 (listed above),

but supplied with a built-in attenuator. This attenuator will not lower the efficiency of the woofer, yet provides precise matching of the "Sphericon" with today's popular

low and medium efficiency speaker and speaker systems. Shpg. wt., 4 lbs. SK-146 Net 22.50

## LAFAYETTE SPHERICON TWEETER AND ACOUSTIC RESEARCH AR-2 SPEAKER SYSTEM COMBINATIONS AT MONEY SAVING PRICES

SPHERICON EXTENDS THE RESPONSE OF YOUR AR SPEAKER TO BEYOND 40,000 CPS

AR-2 10" Acoustic suspension speaker and tweeter assembly; 42-14,000 cps. ±5 db; Size 13 1/2" x 11" x 24" Shpg. wt., 52 lbs. Tweeter and AR-2 Walnut Finish 5.00 Down Net 106.00

SY-298 WX—Consists of Lafayette 146 Sphericon Tweeter and AR-2 Karina (Blond) Finish 5.00 Down Net 116.00

SY-296 WX—Consists of Lafayette SK-146 Sphericon Tweeter and AR-2 Mahogany Finish 5.00 Down Net 101.60

SY-297 WX—Consists of Lafayette SK-146 Sphericon Tweeter and AR-2 Karina (Blond) Finish 5.00 Down Net 95.63



## High Compliance Dual-Voice Coil Stereo Woofers



8" 20.95  
12" 25.50

THE VERY SAME STUDIO QUALITY WOOFERS EMPLOYED IN THE LAFAYETTE CELESTIAL-SATELLITE STEREO SPEAKER SYSTEMS

Acoustical studies have shown that low frequency response is not directional... indeed the stereo effect we hear is determined by frequencies above 350 cps. This dual voice coil woofer features two electrically separate voice coils on a single woofer chassis. Each voice coil receives low frequencies from its respective stereo channel. Both of these signals are blended through the single woofer cone. This advance in woofer design now makes possible 3-channel stereo without the need of complicated costly control filters or adapter networks.

Now Lafayette offers these advanced design dual voice coil woofers for the high-fidelity enthusiast who wishes to build his own 3-channel stereo speaker system—or use it as the basis of a monaural system now and eventually work into a 3-channel stereo system.

**12" DUAL VOICE COIL WOOFER**  
● FREQUENCY RESPONSE 20-2500 CPS ● 2 LB. ALNICO V MAGNET ● 2" VOICE COIL ● HIGH COMPLIANCE CONE FLOATS ON ROLLED CLOTH EDGES ● IMPEDANCE—EACH VOICE COIL 8-OHMS ● POWER HANDLING CAPACITY 30-WATTS  
SK-133 Shpg. wt., 10 1/2 lbs. 2.00 Down Net 25.50



**8" DUAL VOICE COIL WOOFER**  
● FREQUENCY RESPONSE 25-3000 CPS ● 2 LB. ALNICO V MAGNET ● 2" VOICE COIL ● HIGH COMPLIANCE CONE FLOATS ON ROLLED CLOTH EDGES ● IMPEDANCE—EACH VOICE COIL 8-OHMS ● POWER HANDLING CAPACITY 30-WATTS  
SK-139 Shpg. wt., 8 1/2 lbs. 2.00 Down Net 20.95

FOR CROSSOVER NETWORK KIT AND "L" PAD SEE BELOW

**CROSSOVER NETWORK KIT**  
Designed for use with Lafayette Dual Voice Coil Woofer (listed above). Crossover over at 350 cycles. Employs finest quality components. Complete with detailed pictorial instructions. Shpg. wt., 3 1/4 lbs. KT161 7.26

**LAFAYETTE L PADS**  
Two necessary for controlling satellite level. Shpg. wt., 6 oz. VC-49 L pad for 8 ohm circuits Net 1.49

## Lafayette DELUXE CELESTIAL - SATELLITE SPEAKER SYSTEMS A DYNAMIC NEW DIMENSION IN STEREO

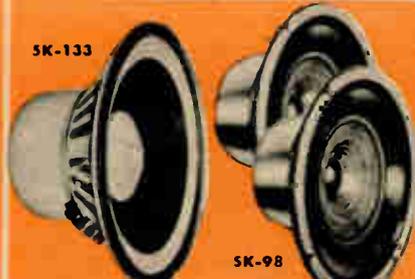

COMPLETE SYSTEM 54.50 ONLY 5.00 Down

- 12" High Compliance Dual Voice Coil Woofer With 2 lb. Alnico V magnet
- 3-Channel Wide Panoramic Sound Ends "Hole In The Middle" or "Ping Pong" Effect
- Special Crossover Network Kit
- Frequency Response 20-16,000 cps.

Lafayette research and engineering facilities have evolved a new conception in stereo speaker systems. Research has established that the low bass frequencies are nondirectional. By employing a newly designed high compliance 12" dual voice coil woofer with 2 lb. Alnico V magnet, Lafayette engineers have utilized this phenomenon. Bass frequencies below 300 cps. are directed from respective stereo channels to two electrically separate voice coils. In this manner both bass signals are blended through the single woofer cone assembly, while the two satellite speakers consisting of 2 SK-98 dual cone 8" speakers reproduce all the bass overtones, middle and high frequencies.

The Celestial-Satellite speaker system utilized with a normal 2-channel amplifier achieves 3-channel wide panoramic stereo without the annoying "hole in the middle" or "ping pong" effect so often found in conventional

stereo speaker systems. A large symphony orchestra spreads across the entire area, while a soloist or small musical group is properly located near the center. Conventional stereo speaker systems require large areas of space with the distance between speaker and location of the listening area in relation to these speakers extremely critical — Not so the Lafayette Celestial-Satellite Stereo system. Complete balance controls are provided for balancing low, middle and high frequency contours to individual listening tastes and room acoustics. Satellites may be placed in any position along the room (high or low) and may be separated by as much as 20 feet, with the Celestial low frequency bookshelf unit located any distance between Satellites as room decor permits. Power Handling Capacity 30 watts. Impedance 8 ohms. Shpg. wt., 25 1/2 lbs. Complete with necessary instructions and hook-up cable.

**CELESTIAL-SATELLITE SYSTEM WITH 8" DUAL VOICE COIL WOOFER**  
This economical 3 channel speaker system provides 3 channel wide panoramic sound from a normal standard 2 channel stereo amplifier and is essentially the same or the larger 12" Celestial-Satellite Speaker System (described above). Speakers consist of a new high compliance 8" dual voice coil woofer with 2 lb. Alnico V magnet, two SK-98 8" dual cone speakers and a special crossover network with balance controls. Frequency response 25-16,000 cps. Power handling capacity 30 watts. Impedance 8 ohms. Shpg. wt., 23 1/2 lbs. SY-393WX Only 5.00 Down Net 54.50

SK-98 8" dual cone speakers and a special crossover network with balance controls. Frequency response 25-16,000 cps. Power handling capacity 30 watts. Impedance 8 ohms. Shpg. wt., 23 1/2 lbs.

SY-394WX Only 2.00 Down Net 49.95



**Satellite Speaker Enclosure:** Specially designed sloping front 3/4" enclosure for SK-98 satellite speaker. Size: 14" W x 10 1/2" H x 7 1/2" D. Shpg. wt., 9 1/2 lbs. CAB-103WX Mahogany CAB-104WX Walnut Net 12.45 CAB-125WX Unfinished Net 10.50

**Famous Lafayette "Eliptoflex" bookshelf enclosure:** Finished on 4 sides for SK-133 12" Dual Voice Coil Woofer. Size: 14" H x 23-7/16" W x 13-5/16" D. Shpg. wt., 24 lbs. CAB-83WX Mahogany, CAB-84WX Walnut Net 36.50 CAB-126WX Unfinished Net 31.50

## NEW! 6 1/2" COAXIAL SPEAKER

● FOR EXCELLENT HI-FI SOUND ● ECONOMICAL & A SPACE-SAVER FOR STEREO  
● RESPONSE 50-16,000 CPS! ● BUILT-IN CROSSOVER NETWORK ● LARGE, HEAVY MAGNETS

An excellent speaker, with all the best features of coaxial design, especially recommended for use in stereo high fidelity systems where space and/or cost are factors. The 6 1/2" woofer is provided with extra-heavy large magnets for good power sensitivity and low distortion; the 2" tweeter is a separate speaker coaxially mounted in a housing which completely seals off back radiation and with a mesh dispersion screen to provide smooth, wide-angle-dispersed high frequency response. The built-in electrical crossover contributes to the overall smooth tonal response of 50-16,000 cps. Woofer resonance is 70 cps; voice coil impedance is 8 ohms. Color-coded, screw-type terminals. Requires 5/8" diameter cutout. Mounts with 4 equally-spaced holes. Size is 6 1/2" diam., 3 1/4" deep. Shpg. wt., 3 1/2 lbs. SK-97 6 1/2" COAXIAL SPEAKER Net 6.95 GET 2 FOR STEREO Only 12.95 Net

ONLY 6.95 BUY 2 FOR STEREO 12.95





## LATEST SHERWOOD-HI-FI COMPONENTS

S-5000 STEREO 40W. AMPLIFIER



189.50

This brand new stereo control amplifier features the most versatile controls available: Dual loudness, bass and treble controls; one knob varies both channels simultaneously—yet, pull out on the knob, and you can vary each channel independent of the other! Features presence, rumble and scratch filters, DC filaments, indicator lights to indicate mode of operation used. For playing monaural records with stereo cartridges, ingenious phasing system balances out all vertical (rumble and noise) pickup! SPECIFICATIONS: POWER: 20 watts each channel, 40 watts on monaural. RESPONSE: 20-20,000 cps  $\pm$  1/2 db at full power. INPUTS: Phono (RIAA), tape head (NARTB), 6 High level. NOISE: -80 db (-60 db for phono). OUTPUTS: dual 4, 8, 16 ohms, dual cathode followers for tape recorder. 12 TUBES: 4-6BQ5/EL84, 2-7199, 5-12AX7/ECC83, GZ34, sel. rect. 14" x 14" x 4". Shpg. wt., 29 lbs. G-265WX less case 5.00 Down Net 189.50

### S-3000 II BASIC FM TUNER



105.50

FEATURES: One of the most sensitive FM circuits ever developed—only .95 microvolt for 20 db quieting. 1.8 microvolt for 30 db. "Feather-Ray" tuning Indicator. Logging dial permits split-second tuning. Special sensitivity control for local or distant stations. SPECIFICATIONS: SENSITIVITY—.95 microvolts for 20 db quieting, 1.8 microvolts for 30 db. FREQUENCY RESPONSE: 20-20,000 cps  $\pm$  1/2 db. DISTORTION AT 100% MODULATION—1.3% 1M, 1/2% harmonic, HUM AND NOISE—60 db below 100% modulation. DRIFT  $\pm$  2 kc. with AFC,  $\pm$  15 kc without AFC. OUTPUTS—Cathode follower audio, FM multiplex, AUDIO OUTPUT—2 volts. TUBES—9 tubes and rectifier. POWER CONSUMPTION—40 watts, 110-120 V 50-60 cycles SIZE: 14" x 10 1/2" x 4". Shpg. Wt., 16 lbs. G-275WX less case 5.00 Down Net 105.50

#### CASES FOR SHERWOOD COMPONENTS

STOCK NO.	MFR. NO.	COLOR	FOR	NET
G-281W	A	Brown Flexstone	SMX-S 5 1/2" x 10 1/2" x 4 1/2"	4.00
G-282W	B	Black Flexstone	"	4.00
G-283W	A	Brown Flexstone	"	5.00
G-284W	B	Black Flexstone	"	5.00
G-285W	C	Mohog. Leatherette	14 x 13 x 4 1/2"	10.00
G-286W	J	Black Leatherette	Shpg. Wt., 8 lbs.	15.00
G-287W	T	Tan Leatherette	Large Case	15.00
G-288W	W	White Leatherette	"	15.00
G-289W	A	Brown Flexstone	5-10001IS, 5-1060S	5.00
G-290W	B	Black Flexstone	5-20001IS, 5-30001IS	5.00
G-291W	C	Mohog. Leatherette	5-4400S	10.00
G-292W	J	Black Leatherette	14 x 10 1/2" x 4 1/2"	15.00
G-293W	T	Tan Leatherette	Shpg. Wt., 6 lbs.	15.00
G-294W	W	White Leatherette	Standard Case	15.00

### NEW Scott 399 STEREO TUNER-AMPLIFIER COMBINATION



419.95

The new Scott 399 combines the famous Scott 330D FM-AM stereo tuner and 299 40-watt stereo amplifier (20-watts each channel) on one compact chassis. The Tuner section features separate silver sensitive FM front end and highly sensitive AM front-end with individual tuning controls for precise station selection. Tuner has switching provisions for FM multiplex stereo or FM-AM stereo. Amplifier section employs separate Bass and Treble controls on each channel, phase reverse switch, third channel output and DC filament supply for preamp. Complete switching facilities have been provided. Frequency response is 20-30,000 cps Harmonic Distortion: 0.8% of full power output. Hum better than 80 db below full power output. 4, 8 and 16 ohm speaker outputs for each channel. FM sensitivity 2 microvolts for 20 db of quieting. Dimensions: 16 1/2" W x 6" H x 14 1/2" D. Shpg. wt., 35 lbs. G-159WX less case 10.00 Down Net 419.95 Scott FWW Walnut Case for 399 Tuner-Amplifier. Shpg. wt., 8 lbs G-160W 2.00 Down Net 29.95

AMAZING VALUES!

Lafayette

## FM-AM STEREO TUNER

MODEL LT 77

Truly a triumph of engineering skill

... Simplicity, flexibility and superb styling have been carefully integrated in this quality instrument. Offering tremendous versatility, the LT-77 will receive the new simultaneous FM-AM stereophonic broadcasts or since the FM and AM sections are completely independent, the tuner may also be employed for FM or AM reception separately. Designed with the future in mind... a multiplex output has been included for the new stereo FM. Each unit has been hand wired and individually laboratory tested.

Controls provide for every tuner function. On-off power switch; Separate AM/FM flywheel tuning; Individual AM/FM volume controls; Choice of AM, FM, FMAFC or stereo reception. FM circuitry features Armstrong grounded grid low noise front end and triode mixer coupled with tuned dual limiters, Foster-Seeley discriminator with AFC and AFC defeat. FM Sensitivity of 1.5 uv for 20 db quieting insures long range reception. Superhet AM circuit with 3 stages AVC and ferrite loopstick antenna; Individual 3 gang tuning condenser and tuned RF stages for both AM & FM sections. Selectivity: FM 200 KC band width; 6 db down, AM 8 KC BW: 6 db down. Frequency Response: FM 20-20,000 cps  $\pm$  1/2 db. AM 20 5,000 cps  $\pm$  3 db; Harmonic Distortion under 1% on FM; under 1% on AM for up to 80% modulation. Hum Level—60 db. Image Rejection: FM, better than 40 db AM 70 db. I.F. Rejection: FM 70 db, AM 50 db Radiation meets FCC requirements. Tubes: 2-6AQ8, 4-6BA6, 2-AU6, 1 each 6BE6, 6AL5 and 6X4 plus diode detector. Antenna Input: 300 ohms. Superbly styled low silhouette enclosure finished in gold and white with easy to read black dial face. Complete with case and legs. Dimensions: 14 1/2" W x 4 1/2" H x 10 1/2" D Feet add 1/2" to height. Shpg. wt., 16 lbs. LT 77 AM-FM STEREO TUNER 5.00 Down NET 74.50

- 14 TUBE PERFORMANCE—10 TUBES (2-DUAL PURPOSE) + RECTIFIER + DIODE + 2-TUNING METERS ● ARMSTRONG CIRCUIT WITH DUAL TUNED LIMITERS AND FOSTER-SEELEY DISCRIMINATOR
- FM AFC AND AFC DEFEAT ● EXTREME SENSITIVITY AND WIDE FREQUENCY RESPONSE ● TUNED GROUNDED GRID R.F. STAGE ON AM & FM ● MULTIPLEX OUTPUT ● FLY WHEEL TUNING ● AM FEATURES BROADBAND TUNED I.F. STAGE ● 2-3 GANG CONDENSERS
- INDIVIDUAL VOLUME- BALANCE CONTROLS FOR AM & FM

WEAK SIGNAL—STRONG SIGNAL... Lafayette's separate, precision twin-tuning meters for FM and AM insure pin-point tuning accuracy every time



74<sup>50</sup>  
COMPARABLE VALUE 139.50

Due to the avalanche of orders for these Tuners, delivery will be delayed until approximately January 25, 1960. However we are filling all orders in strict chronological sequence... Order now for earliest possible delivery.

49<sup>50</sup>  
COMPARABLE VALUE 89.50



## Lafayette FM TUNER


MODEL LT 80

Remarkable... quality, performance and styling that is in every respect the equal and in many instances superior to tuners priced far above the modest cost of this instrument. The same sensitive FM circuit employed in the LT-77 AM-FM Stereo Tuner (Specifications as listed above) has been incorporated in the LT-80... designed and constructed of the finest components, with jewel like precision (each unit is hand wired) in order to insure that each tuner will maintain its excellence year after year with a minimum of maintenance. Making every attempt to anticipate the requirements of the future, Lafayette designers have included a multiplex output for the new stereo F.M. broadcasts. Controls consist of On-Off; FM; FM AFC and FM MEX. Flywheel action tuning control provides velvet-smooth tuning action. Tube compliment consists of 2-6AQ8, 2-6BA6, 2-6AP6, 1 each 6AL5 and 6X4. Handsome low silhouette enclosure will do justice to any decor. Beautifully finished in gold and white with contrasting black dial face. Complete with case and legs. Dimensions: 11 1/2" W x 8" D x 4 1/2" H Legs add 1/2" to height. Shpg. wt., 11 lbs. LT 80 FM STEREO TUNER 2.00 Down NET 49.50

Pin-point tuning accuracy is provided by this precision tuning meter; evaluates relative strength of the incoming signal... invaluable when tuning weak stations.



- ARMSTRONG CIRCUIT FOSTER-SEELEY DISCRIMINATOR AND DUAL TUNED LIMITERS
- EXTREMELY SENSITIVE—1.5 UV FOR 20DB QUIETING
- 10-TUBE PERFORMANCE—8 TUBES (2-DUAL PURPOSE)
- 20-20,000 CYCLES  $\pm$  1/2 DB ● AFC
- AFC DEFEAT ● SUPERB LOW SILHOUETTE STYLING

## Lafayette COMPLETE STEREO PHONO SYSTEM

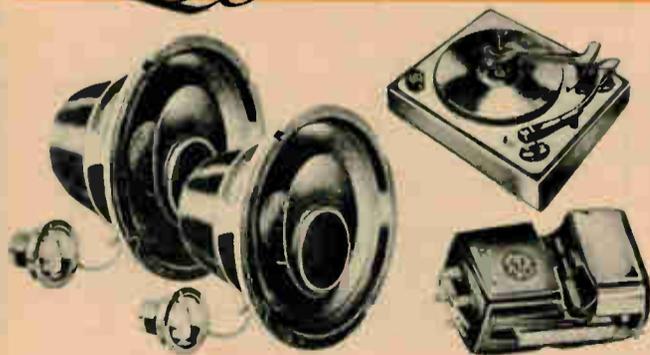

Bring the full beauty, and realism of stereo sound into your home with these matched Lafayette components—Carefully selected and matched by experts, rigidly engineered and manufactured to the most exacting specifications... each component has been completely evaluated by comparative laboratory and listening tests in order to provide the utmost in flexibility, quality and value.

- Heart of the system is the new LA-235 35 watt stereo amplifier which acts as a complete stereo control center. Designed with the future in mind all necessary inputs are provided if you wish to add stereo tape and/or stereo FM/AM later.
- The famous Garrard RC 121 4-speed automatic record changer is supplied with an attractive wood base in your choice of finisher.
- The new GE VR-227 stereo cartridge insures perfect reproduction throughout the full audio range from 20-17,000 cps.
- Two of Lafayette's new 'SK-128 Ultra-Linear full range 8-inch biaxial speakers featuring the most advanced speaker design available, complete this excellent system.

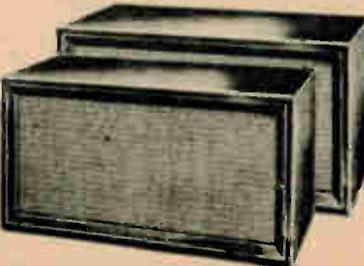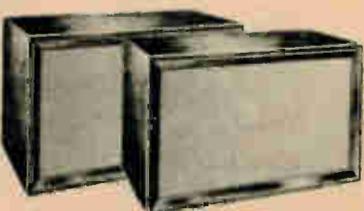

- #### COMPONENTS
- LAFAYETTE LA-235 35 WATT STEREO AMPLIFIER 69.50
  - GARRARD RC 121 4-SPEED RECORD CHANGER 41.65
  - NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE 24.45
  - WOOD BASE FOR RC121 (SPECIFY FINISH) 3.95
  - 2-LAFAYETTE SK-128 FULL RANGE 8" DUAXIAL SPEAKERS 39.00
- Regular Catalog Price 128.55

ALL MATCHED COMPONENTS  
139<sup>95</sup>  
5.00 Down

- Complete Stereo phono system as listed above. Shpg. wt., 46 lbs.
- HF-725WX 5.00 Down Net 139.95
- Same as HF-725 WX, with the addition of 2-Lafayette amazing "Mini-Duct" Bookshelf Enclosures (Specify Enclosure Finish) Shpg. wt. 92 lbs.
- HF-726WX 5.00 Down Net 182.45
- Same as HF-725WX, but with 2-Lafayette Famous SK-58 Free Edge 12" 2-way speakers. Shpg. wt., 58 lbs.
- HF-727 WX 5.00 Down Net 158.50
- Same as HF-727WX, with the addition of 2-Eliptoflex Bookshelf Enclosures (Specify Enclosure Finish) Shpg. wt., 106 lbs.
- HF-728WX 10.00 Down Net 212.95



● SELECT YOUR OWN CARTRIDGE ● You may substitute the Shure M7D, Pickering 371C, or the new Electro-Voice 31MD7 in any system shown with the GE VR-22 at no additional cost. The Shure M3D may be substituted at an additional cost of \$24.00.

# New! LAFAYETTE LA-55 15 WATT MONAURAL AMPLIFIER

- FREQUENCY RESPONSE: 15-30,000 CPS
- POWER OUTPUT 15 WATTS
- SENSITIVITY: 3 MV MAG. PHONO
- HUM 65 DB BELOW RATED OUTPUT
- HARMONIC DISTORTION LESS THAN .3%



- 5 INPUT CHANNELS
- RUMBLE FILTER
- EL84 OUTPUT TUBES IN PUSH-PULL
- BEAUTIFULLY STYLED



## The Most Extraordinary Hi-Fi Value Ever Offered

Outstanding Performance and Engineering + Beautiful Styling + Unbeatable Price—add up to make the Lafayette LA-55 truly the finest HI-FI monaural amplifier value today. . . Beautifully styled in gold and white, the LA-55 easily adapts to any room decor. Perfect for that music system in your living room, finished basement, store or office. Ruggedly constructed, this fully integrated amplifier-preamplifier employs premium quality EL84 tubes in push-pull and advanced circuitry for faithful reproduction of all monophonic sources. . . perfect for use as a second amplifier for stereo or for starting out monophonically and adding stereo at a later date. Engineered to include every practical feature making a worthwhile contribution to hi-fi reproduction. . . SPECIFICATIONS: Power Output 15 watts Institute of High Fidelity Manufacturers Rating (30 watts peak) Frequency Response 15-30,000 cps ± 1 db (at normal listening

**39.50**  
COMPARABLE  
VALUE ~~69.50~~  
2.00 DOWN

level); Sensitivity: For full power, High level inputs 0.5v. Mag. phono 3 mv. Hum and Noise: Volume control at max. High level inputs 65 db below rated output. Mag. Phono 55 db below rated output; Harmonic Distortion less than .3%. Inputs: Total 5—Aux, Tuner, Mag. Phono, Crystal Phono, Tape Head. Outputs: Tape Out, 4, 8 and 16 ohm speaker terminals; Tubes: Total of 5 plus rectifier—2-EL84, 1-6BL8, 1-AU6, 1-12AX7, and 1-6CA4/WZ81. Controls: Monitor/On-Off; Volume/Power On-Off Base; Treble; Rumble Filter. Hum balance control. Selector: 4-position, Aux, Tuner, Phono, Tape Head. Complete with removable case and legs. AC receptacle on rear of chassis. Dimensions: 13 1/2" W x 4" H x 8 3/4" D. Knobs extend 1/4" in front of panel. Shpg. wt., 20 lbs.

LA-55WX ..... 2.00 Down ..... Net 39.50

## LAFAYETTE SUPER-VALUE HIGH-FIDELITY PHONO SYSTEM



### PLAY STEREO & MONAURAL RECORDS MONAURALLY NOW — ADD COMPLETE STEREO LATER

This economical high-fidelity system is the performance value of the year. Designed for ruggedness as well as beauty, these components will satisfy even the most critical music listener.

COMPONENTS	
LAFAYETTE LA-55 15 WATT COMPLETE AMPLIFIER	39.50
NEW GE VR-22 (.7 MIL) DIAMOND CARTRIDGE FOR BOTH STEREO AND MONAURAL RECORDS	24.45
GARRARD RC-121 4-SPEED RECORD CHANGER	41.65
WOODBASE FOR RC121 (Specify Finish)	3.95
LAFAYETTE SK-124 BOOKSHELF SPEAKER SYSTEM (Finished on 4 sides in Mahogany or Walnut)	17.50

LAFAYETTE SYSTEM PRICE **99.50** YOU SAVE **27.55**

Complete phono system as listed above featuring Lafayette's famous LA-55 Amplifier and SK-124 Bookshelf Speaker System. Finished on 4 sides for horizontal or vertical placement anywhere in the room—provides a smooth distortion free response with a deep fundamental base and clean pure highs normally found only in multiple speaker systems. Shpg. wt., 53 lbs.

HF-763WX	5.00 Down	Net 99.50
Same system as HF 763 WX, with the addition of the Lafayette LT-80 FM Tuner. Shpg. wt., 64 lbs.		
HF-764WX	5.00 Down	Net 147.00


## NEW GE MODEL G-7700 56 WATT STEREO AMPLIFIER



Engineered to fulfill the need for a top quality unit at a modest cost. Dual concentric controls permit individual bass and treble adjustment. Controls: Input selector (tape head, monaural phono, stereo phono, tuner, auxiliary); speaker mode selector; loudness; contour; balance; bass; treble; rumble filter; scratch filter; speaker phasing switch. Inputs: 2 stereo cartridge, 2 stereo tape head, 1 mon. phono, 2 tuner, 2 auxiliary stereo. Outputs: Dual speaker (4, 8, 16 ohm), dual output jacks, 2 AC outlets. Power output: 56 watts (28 watts per channel), music power. Freq. response: 20-20,000 cps. ± 0.5 db. Harmonic distortion below 1% at full rated power. Hum and noise inaudible. Channel separation: 40 db minimum. For 117V, 60 cycles AC. Cabinet finished in beige vinyl. Size 15 x 12 x 5 1/2". Shpg. wt., 31 lbs.

G-326WX ..... 5.00 down ..... Net 186.15  
Model G-7710. Same as G-7700, but white vinyl finish.  
G-327WX ..... 5.00 down ..... Net 186.15


## NEW GE MODEL 7600 40 WATT STEREO AMPLIFIER

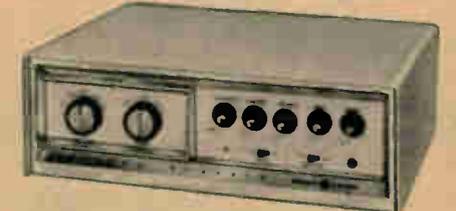

This integrated stereo amplifier combines 2 power amplifiers and 2 preamp control units on a single chassis. Features concentric bass and treble control to permit individual channel adjustment. Power output 20 watts per channel or 40 watts total. Front panel controls include: input selector, speaker mode selector; loudness; contour; balance (continuously variable); bass; treble; rumble filter on-off. Inputs: 2 stereo cartridge, 2 tuner, 2 auxiliary stereo. Outputs: Dual speaker (4, 8, 16 ohm), dual output jacks, 2 AC outlets. Hum and noise 65 db below 20 watts on phono input. Freq. response: 20-20,000 cps ± 0.5 db. Harmonic distortion: below 1% at full rated power. For 117V., 60 cycle AC. 11 tubes. Cabinet finished in saddle brown vinyl. Size 15 x 12 x 5 1/2". Shpg. wt., 30 lbs.

G-325WX ..... 5.00 down ..... Net 137.15

## NEW GENERAL ELECTRIC FM-AM TUNER MODEL FA-17

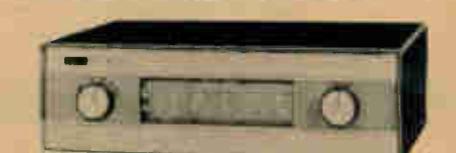


This new GE FM-AM Tuner features high sensitivity, and ability to receive weak signals with minimum distortion. Specifications: AM sensitivity—200 μv per meter for 20 db signal-to-noise ratio; FM—25 microvolts on 300 ohm input for 20 db quieting. FM Distortion—less than 1.5% harmonic at rated output—less than 2% IM. Noise—FM 55 db below 100% modulation—AM built-in ferrite rod antenna. AFC eliminates FM drift. Dual-purpose FM-AM tuning meter. Saddle brown finish. Dimensions: 15-1/32" W x 5 1/2" H x 10 1/2" D. Shpg. wt., 15 lbs. For 110-120 Volts, 60 cycles AC.

G-329WX	5.00 down	Net 127.35
FA-15 Same as FA-17, but finished in beige		
G-330WX	5.00 down	Net 127.35
FA-16 same as FA-17, but finished in white		
G-331WX	5.00 down	Net 127.35

# Lafayette

## STEREO 235 GIVES NEW DIMENSION TO MUSIC

### UNCOMPROMISING QUALITY!

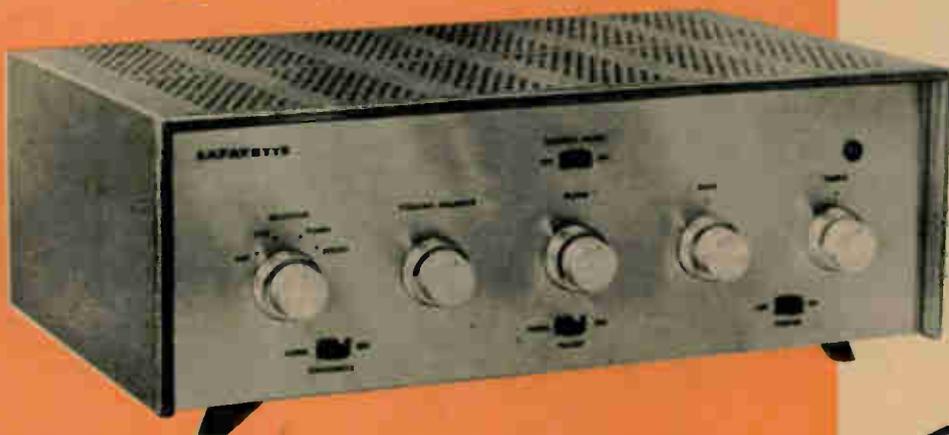

**35 WATT STEREO AMPLIFIER**  
**17 1/2 WATTS PER CHANNEL**

- FREQUENCY RESPONSE: 20-20,000 CPS ± 1 DB
- HARMONIC DISTORTION LESS THAN 1% AT RATED OUTPUT
- IM DISTORTION LESS THAN 2%
- 4 EL84 TUBES IN PUSH-PULL
- DUAL CONCENTRIC SEPARATE BASS AND TREBLE CONTROLS
- CLUTCH-OPERATED VOLUME-BALANCE CONTROLS
- HIGH SENSITIVITY FOR USE WITH NEW STEREO CARTRIDGES
- VARIABLE BLEND CONTROL ELIMINATES EXAGGERATED CHANNEL SEPARATION

**SUPER VALUE**  
**\$ 69.50** 5.00 Down  
COMPARABLE VALUE **109.50**

Superior in concept, design and performance, the new Lafayette LA-235 represents a new standard in stereophonic amplifiers. Every outstanding feature you could ask for in an amplifier has been provided—Completely versatile, this instrument may be used as a dual 17 1/2 watt stereo amplifier or as a single monophonic 35 watt amplifier. . . perfect for those on a limited budget who wish to start out with a monaural system and eventually build into stereo.


Engineered to deliver the finest performance under all conditions, an exclusive blend control has been incorporated, providing continuously variable channel separation from full monophonic to full stereo, thus insuring the correct degree of stereo separation for individual listening tastes and room acoustics. Concentric clutch-operated volume-balance controls provides individual or simultaneous level control for both channels. Bass and treble are adjusted by means of separate dual-concentric controls for independent tonal control of each channel. Function switch provides Aux, Tape (high level) Tuner and Phono. Simple slide switches are provided for Power on-off, Phase Reverse, Channel Reverse.

SPECIFICATIONS: 35 watts—17 1/2 watts per channel ± 1 db. Institute of High Fidelity Manufacturers Rating (70 watts peak) Harmonic Distortion: Less than 1% at rated output; IM Distortion: Less than 2%. Frequency Response: 20 to 20,000 cps ± 1 DB (at normal listening level); Tone Control Range: Treble ± 10 db at 10 kc; Bass ± 10 db at 50 cps. Sensitivity: For full power—High level inputs 0.5v. Mag. phono 4 mv at 1 kc. Hum and Noise: Volume control at max.—High level inputs 65 db below rated output. Mag. phono 55 db below rated output. Channel Separation: Greater than 40 db. Total: 10 inputs 2 Aux, 2 Tape (high level) 2 Tuner, 2 Mag. Phono, 2 Crystal Phono; Total 4 outputs 2 Tape Out, AC convenience outlet located on rear. Dual 8 and 16 ohms speaker outputs. Total of 9 tubes consisting of 4-EL84, 2-7199, 2-12AX7 and 1-GZ34. For 117 volts, 50/60 cps AC. Attractively styled in a rich brown vinyl cage with brass plated escutcheon and ivory and gold knobs. Dimensions: 14" W x 4 1/4" H x 9" D. Cover and legs may be removed for panel mounting. Shpg. wt., 22 lbs.

LA-235WX ..... 5.00 Down ..... Net 69.50

# STEREO-FIDELITY RECORDS FEATURING the "101" STRINGS..

## the FIRST STEREO SCORED orchestra

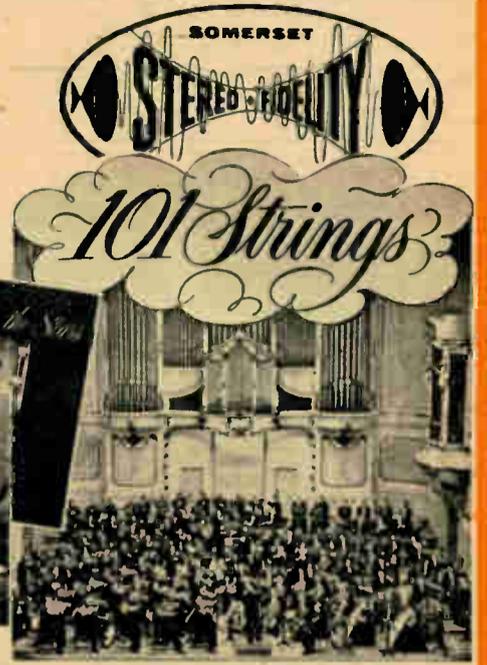

**Reg. 2.98 ONLY 1.99**  
**SAVE! ANY 5 9.49**  
 Reg. 14.90  
 Shpg. wt., 1 lb. each disc

**101 STRINGS... THE WORLD'S FIRST STEREO SCORED ORCHESTRA** — For lush magnificence and stereo depth, the world's largest recording orchestra presents 20 albums featuring the finest in music.

- SF-4300—THE WORLD'S GREAT STANDARDS** — 10 of the world's great standard songs written by the world's greatest composers of popular music. There's A Small Hotel, Day By Day, and more. **STOCK NO. PR-195**
- SF-4400—A NIGHT IN THE TROPICS** — A musical experience in which you feel the gentle warmth of latin climates in rich melodic settings. La Paloma, The Moon Was Yellow, etc. **STOCK NO. PR-196**
- SF-4500 — SYMPHONY FOR LOVERS** — New arrangements of songs and movements from the world of classical music. Selections include Barcarolle, Schubert's Serenade, Cradle Song, and others. **STOCK NO. PR-197**
- SF-5000—PAL JOEY** — 101 Strings play hit songs from Pal Joey and The Red Mill. You'll remember My Funny Valentine, The Lady Is A Tramp, I Didn't Know What Time It Was, Bewitched, etc. **STOCK NO. PR-198**
- SF-5800—101 STRINGS PLAY THE BLUES** — In tribute to W. C. Handy, the orchestra captures the heart and emotional qualities of some of the greatest blues. St. Louis Blues, Birth of the Blues, Blues in the Night, etc. **STOCK NO. PR-199**
- SF-6200 — HIJ AMERICAN WALTZES** — Moments of nostalgia and delicate relief from the most popular American waltzes. Included are Missouri Waltz, Tennessee Waltz, Beautiful Ohio. **STOCK NO. PR-200**
- SF-6600 — THE SOUL OF SPAIN** — 101 Strings recapture the tenderness and fiery excitement of Spanish music. Malaguena, Espana, and others. **STOCK NO. PR-201**
- SF-6700—CONCERTO UNDER THE STARS** — A program of specially arranged selections to recreate for you, a night of concert under the stars. Claire De Lune, Cornish Rhapsody, and more. **STOCK NO. PR-202**
- SF-6800—A NIGHT IN VIENNA** — Light hearted gaiety of music from the city of nostalgia. The old favorites include Blue Danube, Tales From Vienna Woods, Merry Widow Waltz. **STOCK NO. PR-203**
- SF-6900—SUGAR AND SPICE OF RUDOLF FRIML** — 9 of the wonderful songs written by Rudolf Friml with the orchestra conducted by the composer. Donkey Serenade, Someday, Rosemarie, and more. **STOCK NO. PR-204**
- SF-7000—THE SILVER SCREEN** — Award winning scores of some of the leading motion pictures to come out of Hollywood. Ruby, Love Is A Many Splendored Thing, Picnic, Spellbound, etc. **STOCK NO. PR-205**
- SF-7000—MY FAIR LADY/THE KING AND I** — Here are all the hit songs from these two top box office musicals. Enhanced by the truly rich and colorful arrangements of Robert Russell Bennett. Played by New World Theatre Orchestra. **STOCK NO. PR-223**
- SF-7800—PICTURES AT AN EXHIBITION** — The Nord Deutsches Symphony Orchestra presents the famous work of Mussorgsky as arranged for orchestra by Maurice Ravel. Included are Promenade, Gramus, Bydlo, Tuileries, etc. **STOCK NO. PR-215**
- SF-8200—WARSAW CONCERTO** — Favorite classical selections by David Haines and the Paris Theatre Orchestra. Also included are Chopin's Nocturne, and Tchaikovsky's Nutcracker Suite. **STOCK NO. PR-216**
- SF-8900—MEN OF THE MALL** — A brilliant program of marches of the British Armed Forces with actual sounds of Big Ben and the cavalry. Rule Britannia, Pomp And Circumstance, more. **STOCK NO. PR-224**
- SF-9400—PEER GYNT SUITES NO. 1 and 2** — The best known works of Norway's leading composer, Edvard Grieg, as played by the Hamburg Staatsoper Orchestra. In The Hall Of The Mountain King, Morning Mood, Anitra's Dance, etc. **STOCK NO. PR-217**
- SF-9700—SCHEHERAZADE** — A symphony in jazz by the Studio Symphony and the Video All-Stars conducted by Skip Martin, adapted from Rimsky-Korsakov's immortal Scheherazade. **STOCK NO. PR-225**
- SF-9900—THE SOUL OF SPAIN (Vol. II)** — More of the exciting music of the unpredictable Spaniard and his land. You'll top your toes to The Breeze and I, Le Cid, Matador, etc. **STOCK NO. PR-211**
- SF-8500—RUSSIAN FIREWORKS** — A romantic impression of old Russia painted on a canvas of melodic texture. Volga Boatman, Sabre Dance, and more. **STOCK NO. PR-207**
- SF-8600—PORGY AND BESS** — Gershwin's immortal folk opera drama interpreted by the 101 Strings. The familiar Summertime, It Ain't Necessarily So, I Got Plenty of Nothin', etc. **STOCK NO. PR-208**
- SF-8700—OPERA WITHOUT WORDS** — A program of some of the most familiar and best loved arias from the world's great operas. Un Bel Di, Musette Waltz, Celeste Aida, Habanera, and more. **STOCK NO. PR-209**
- SF-9000—THE RIVIERAS** — The 101 Strings invite you on a Mediterranean cruise to Spain, France and Italy. Listen to La Mer, Estrellita, Santa Lucia, Flamenco Fantasy, and others. **STOCK NO. PR-210**
- SF-10200 — QUIET HOURS** — The 101 Strings set a soft, warm mood for the Quiet Hours of the day and night. Selections include Green Sleeves, All Through The Night, Serenade, and others. **STOCK NO. PR-212**
- SF-11200—EAST OF SUEZ** — Capture the spices of the exotic lands in the romance and adventure of a trip east of Suez. In A Persian Market, Song of India, Arab Dance, Baghdad, others. **STOCK NO. PR-213**
- SF-11500—BACK BEAT SYMPHONY** — Rock and roll in the sound of magnificence — the majesty of the symphony with a beat. Choppin' Chopin, Rigalotta Rock, Romeo and Juliet, and more. **STOCK NO. PR-214**
- SF-12000 — FLAMENCO** — A program of Romenco as heard in cantinos throughout Andalucia. Thrill to the Curra Amaya Dancers as their repertoire exploits the singer, guitarist, castanets, dancers. **STOCK NO. PR-231**
- SF-12200—A KISS IN THE DARK** — The Mulcays, with the Hollywood Soundstage Chorus, present the warm mood of the world's greatest electric harmonicas. Melodies include Kiss Me Again, Besame Mucho, One Kiss, etc. **STOCK NO. PR-232**
- SF-12300—SOFT, WARM MOOD** — Roberto Rossini, his orchestra and chorus, in a collection of wonderful ballads that set a soft, warm mood. Dream to Blue Moon, Always, others. **STOCK NO. PR-233**
- SF-10500—EXOTIC ISLAND** — The moods and sounds of a tropical paradise with unique island instruments, birds and jungle sounds. Moon of Manakora, Taboo, Bali Hai, and more. **STOCK NO. PR-218**
- SF-2000—JOHANN STRAUSS WALTZES** — Some of the most famous waltzes from the pen of "The King of the Waltz." Played by the Danube Strings, conducted by Hans Walthem. Emperor Waltz, Voices of Spring, Blue Danube, more. **STOCK NO. PR-222**
- SF-10900—VICTORY AT SEA** — Highlights from Richard Rodgers stirring score, arranged by Robert Bennett, played by Reinhard Linz and the London Philharmonic Orchestra. Also: Armed Forces Symphony in a suite of service anthems. **STOCK NO. PR-226**
- SF-11400—STEREO DYNAMICS I** — To test your stereo equipment or score high — out of your neighbors. Includes Fire Goddess, La Paloma, etc. **STOCK NO. PR-229**
- SF-11900 — AT WESTERN CAMPFIRES** — Join the Sons of the Purple Sage in a peaceful and relaxing evening under the stars beside a western campfire. Sing Cool Water, Cimarron, others. **STOCK NO. PR-230**

RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN  
 ADD 35¢ PER ORDER FOR PACKING AND HANDLING

**BELOW HALF PRICE—SAVE OVER 53%**  
 REG. 14.94 EACH  
 2 COMPLETE  
**TCHAIKOVSKY BALLETS 6.98 EA**  
**MERCURY 3-DISC 12" LP ALBUMS**



**OL-3-103A-THE SLEEPING BEAUTY** — For the first time on discs, the Minneapolis Symphony Orchestra under Antal Dorati's dynamic baton, present a truly authentic, complete and beautifully recorded performance of Tchaikovsky's Sleeping Beauty Ballet. The 12-page booklet tells the complete story with drawings of the settings and characters. Shpg. wt., 3 lbs. **STOCK NO. PR-294**



**OL-3-102A-SWAN LAKE** — The entire score of Tchaikovsky's ever-popular ballet, Swan Lake, as he wrote it and as he intended it to be performed. Antal Dorati leads the Minneapolis Symphony in this "world premier" as the complete ballet score is recorded for the first time. And there's a 16-page booklet that guides you through the ballet story, assisted by handsome illustrations. Shpg. wt., 3 lbs. **STOCK NO. PR-295**



- LSC-9300 RCA VICTOR**  
 Contains 10 Stereo 12" LP records in a superb colored album with specially designated pockets for each record. Includes an illuminating foreword on Stereo plus detailed program notes for all of the selections. Performances are by the world's most famous orchestras, soloists and conductors.
- RECORD 1** — Beethoven SYMPHONY No. 3, IN E-FLAT, Op. 55 ("Eroica") Boston Symphony Orchestra, Charles Munch, Conductor.
  - RECORD 2** — Tchaikovsky SYMPHONY NO. 6, IN B MINOR, Op. 74 ("Pathétique") Boston Symphony Orchestra, Pierre Monteux, Conductor.
  - RECORD 3** — Dvorak SYMPHONY No. 5, IN E MINOR, Op. 95 ("From the New World") Chicago Symphony Orchestra, Fritz Reiner, Conductor.
  - RECORD 4** — HI-FI FIEDLER — Rimsky-Korsakov Suite from "Le Coq d'Or" — Rossini Overture to "William Tell" — Tchaikovsky Marche Slav. Boston Pops Orchestra, Arthur Fiedler, Conductor.
  - RECORD 5** — Copland — BILLY THE KID — Ballet Suite — BILLY THE KID WALTZ — RODEO. Morton Gould and his Orchestra.
- PR-100** 10 Record RCA Stereo Album. Shpg. wt., 10 lbs. **Net 24.95**

**RCA VICTOR**  
**Save Over 58%**  
**A FANTASTIC SCOOP!**  
 NOW ONLY  
**LIST 60.00 24.95**  
 YOU SAVE OVER 35.00!

**RCA VICTOR 10 RECORD STEREO LP ALBUM**  
**STEREO FOR THE JOY OF IT**  
 Classical Music of Today In The Sound of Tomorrow

**LIMITED QUANTITIES — ONLY 323 LEFT**  
**ORDER TODAY, DON'T DELAY!**

- RECORD 6** — Brahms CONCERTO IN D, Op. 77 — Jascha Heifetz, Violinist; Chicago Symphony Orchestra, Fritz Reiner, Conductor.
- RECORD 7** — Saint-Saens CONCERTO NO. 2, IN G MINOR, Op. 22 Franck SYMPHONIC VARIATIONS, Arthur Rubinstein, Pianist; Symphony of the Air, Alfred Wallenstein, Conductor.
- RECORD 8** — Mussorgsky-Ravel — PICTURES AT AN EXHIBITION — Chicago Symphony Orchestra, Fritz Reiner, Conductor.
- RECORD 9** — Ravel BOLERO: LA VALSE; RAPSODIE ESPAGNOLE—Debussy PRELUDE TO THE AFTERNOON OF A FAUN — Boston Symphony Orchestra, Charles Munch, Conductor.
- RECORD 10** — Prokofiev LIEUTENANT KIJE, Op. 60 — Stravinsky SONG OF THE NIGHTINGALE — Chicago Symphony Orchestra, Fritz Reiner, Conductor.

RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN  
 ADD 35¢ PER ORDER FOR PACKING AND HANDLING

# Grand Award

# RECORDS... 12" LP STEREO HI-FI ALBUMS



IN LOTS of 5

**12.99**  
24.90  
Value

Reg. 4.98

ONLY

**2.69** EACH

Shpg. wt., 1 lb. each disc

**GA-201-SD — THE ROARING 20's** — 14 great songs from the Era of Wonderful Nonsense excitingly performed by Enoch Light and the Charleston City All-Stars. Some of the 14: Barney Google, Everybody Loves My Baby, That Old Gang of Mine. **STOCK NO. PR-170**

**GA-202-SD — THE FLIRTY 30's** — Sensational and authentic performances of the most popular song hits of the era—Gat A Date With an Angel, The Object of My Affection, Three Little Fishies. **STOCK NO. PR-171**

**GA-204-SD — KNUCKLES O'TOOLE** plays **HONKY-TONK PIANO** — America's #1 honky tonk piano man brings back a souvenir of those good old days. Somebody Stole My Gal, Sweet Rosie O'Grady, I'll Get By. **STOCK NO. PR-172**

**GA-205-SD — ROMAN SPECTACULAR** — The most popular Italian songs starring Charles Magnante and his orchestra. Standards and new favorites include Oh Maria, O Sole Mio, Non Dimenticar. **STOCK NO. PR-173**

**GA-206-SD — GREAT SONG HITS OF THE TOMMY AND JIMMY DORSEY ORCHESTRAS** — Conducted by Bobby Byrne, the Alumni Orchestra performs those great song hits made famous by the fabulous Dorseys... Marie, Boogie Woogie, others. **STOCK NO. PR-174**

**GA-207-SD — GREAT SONG HITS OF THE GLENN MILLER ORCHESTRA** — Bobby Byrne and the Alumni orchestra play a tribute to the great Glenn Miller and his orchestra. In The Mood, Tuxedo Junction, Moonlight Serenade, more. **STOCK NO. PR-175**

**GA-208-SD — PAUL WHITEMAN: HAWAIIAN HITS** — Paul Whiteman and his orchestra in a new and delightful recording of the most popular Hawaiian hits: My Little Grass Shack, Pagan Love Song. **STOCK NO. PR-176**

**GA-209-SD — KNUCKLES O'TOOLE** plays **RAGTIME PIANO HITS** — The greatest all-time ragtime piano hits by America's No. 1 piano man. Old Piano Roll Blues, Nola, plus 14 more hits. **STOCK NO. PR-177**

**GA-212-SD — SPANISH SPECTACULAR** — Authentic interpretations of the most beautiful Spanish songs played by Charles Magnante and his All Star orchestra. Jalousie, Valencia, and others. **STOCK NO. PR-178**

**GA-213-SD — THE WORLD'S MOST BEAUTIFUL WALTZES** — The most delightful Viennese waltzes of Johann Strauss and Franz Lehár performed by the Strings of the Symphonia Royale. Blue Danube, Emperor Waltz, others. **STOCK NO. PR-179**

**GA-214-SD — AROUND THE WORLD IN 80 DAYS** — Exciting new instrumental arrangements of the musical score from this great film, by Enoch Light and his orchestra. Songs include Around the World Overture, Passepartout, and more. **STOCK NO. PR-180**

**GA-215-SD — GIGI** — The Fabulous Hollywood musical movie hit musical score by Alan J. Lerner and Frederick Loewe as played by Enoch Light and his orchestra and chorus. **STOCK NO. PR-181**

**GA-216-SD — MY FAIR LADY** — Songs from Lerner and Loewe's great Broadway musical hit performed by Enoch Light and his Orchestra and Chorus. Songs include The Rain in Spain, Wouldn't it Be Laverly. **STOCK NO. PR-182**

**GA-219-SD — CORRIDA** — Thrilling performances of the intense and spectacular music of the bullfight, played by La Banda Los Amantes de la Corrida. **STOCK NO. PR-183**

**GA-222-SD — I WANT TO BE HAPPY CHA CHA'S** — Enoch Light and the Light Brigade take you south of the border in cha cha tempo. Some of the toe-tapping tunes are Tea for Two Cha Cha, Sweet and Gentle, and others. **STOCK NO. PR-184**

**GA-225-SD — THE GREAT THEMES OF AMERICA'S GREATEST BANDS** — Bobby Byrne conducts the All-Star Orchestra in this recording of themes from famous bands: Moonlight Serenade, Glenn Miller; Let's Dance, Benny Goodman; and more. **STOCK NO. PR-185**

**GA-226-SD — HAMMOND ORGAN SPECTACULAR** — Featuring The Spectaculars, sensational new instrumentalists on Hammond organ, accordion, guitar and bass. Selections are Time On My Hands, Hindustan, Till The End of Time, plus others. **STOCK NO. PR-186**

**GA-227-SD — HAPPY CHA CHA'S (Vol. II)** — More of those exciting cha cha's in authentic Latin rhythms by Enoch Light and the Light Brigade. Songs include Baby It's Cold Outside Cha Cha, Pretty Baby Cha Cha, etc. **STOCK NO. PR-187**

**GA-230-SD — BACCALONI IN STEREO** — Salvatore Baccaloni, world-great bassobuffo, in a recording of popular Italian songs he loves most... Funiculi Funicula, Chella Lla, plus others. **STOCK NO. PR-188**

**GA-232-SD — THE INK SPOTS** — America's most popular and delightful quartet. Join with them in a dozen of their greatest hits made famous throughout the years—you'll recognize them all. **STOCK NO. PR-189**

**GA-235-SD — SING A SONG WITH KNUCKLES O'TOOLE** — The great "Knuckles," his Orchestra and his vocal Chorus of 18 have a wonderful time with Bear Barrel Polka, Casey Jones, and more. **STOCK NO. PR-190**

**GA-237-SD — HAWAII CALLS** — Harry Hoemele and his Island Orchestra in a new album of popular Hawaiian songs including Na Ali'i, Beyond the Reef, Hawaiian Wedding Song, and more. **STOCK NO. PR-191**

**GA-240-SD — SING A SONG WITH KNUCKLES O'TOOLE (Vol. II)** — For downright sing along fun no one can top the great "Knuckles" and his chorus... Alexander's Ragtime Band, You Made Me Love You, many more. **STOCK NO. PR-192**

**GA-241-SD — PAUL WHITEMAN: THE NIGHT I PLAYED 666 FIFTH AVE.** — "Pops" plays 25 of his favorite dance songs — medley style. Songs include From This Moment On, Bewitched, and others. **STOCK NO. PR-193**

**GA-243-SD — DIXIELAND** — Sensational Dixieland arrangements of hits popular in the Roaring 20's by the Charleston City All-Stars. Somebody Stole My Gal, Some Of These Days, Chicago, etc. **STOCK NO. PR-194**

RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN  
ADD 35¢ PER ORDER FOR PACKING AND HANDLING

## NOW! Lafayette Gives You Tremendous Savings On AUDIO FIDELITY INCLUDING SELECTED LATEST RELEASES

DISCOUNTS OVER 45% • SAVINGS AS HIGH AS \$3.17

\$6.95 STEREO

\$5.95 MONAURAL

**3.78** each

**3.25** each

Shpg. wt., 1 lb. each disc



**THE BRAVE BULLS**—Step right into the bull ring with the original Banda Taurina of the Plaza Mexico, Genaro Nunez, conductor. Includes the famous Bullfighter's Entry Music (La Virgen De La Macarena), and a musical description and picture story of the fight. (Monaural, AFLP-1801) 5.95 value. **3.25**  
**PR-130** (Stereo, AFSD-5801) 6.95 value. **3.78**  
**PR-131** **3.78**

**ROME WITH LOVE**—Jo Basile, with his accordion and orchestra, give you an intimate tour of the Italian capital in his rich, warm and dynamic style. Nostalgic and beautiful Italian melodies include Arrivederci Roma, Anima E. Core, O Sole Mio, Santa Lucia. (Monaural, AFLP-1822) 5.95 value. **3.25**  
**PR-132** (Stereo, AFSD-5822) 6.95 value. **3.78**  
**PR-133** **3.78**

**MALLET MAGIC**—Harry Brewer and his Quintet play old favorites in a new style of music-making. You'll appreciate Bumble Bee Bofero, Tulip Polka, and others. (Monaural, AFLP-1825) 5.95 value. **3.25**  
**PR-134** (Stereo, AFSD-5825) 6.95 value. **3.78**  
**PR-135** **3.78**

**JOHNNY PULEO**—The little rascal with his mischievous group display their artistic talent on the mouth organs. You'll remember Peg O' My Heart, Roses of Picardy, Peanut Vendor, Twelfth Street Rag, etc. (Monaural, AFLP-1830) 5.95 value. **3.25**  
**PR-136** (Stereo, AFSD-5830) 6.95 value. **3.78**  
**PR-137** **3.78**

**RAILROAD SOUNDS**—The sounds of a vanishing era captured in all its glory and transformed into a pageantry of sounds for the high-fidelity enthusiasts. (Monaural, AFLP-1843) 5.95 value. **3.25**  
**PR-138** (Stereo, AFSD-5843) 6.95 value. **3.78**  
**PR-139** **3.78**

**HAWAII**—Johnny Pineapple and his Islanders bid you aloha to waltzing, sensuous Hawaii. You'll recognize the familiar Lovely Hula Hands, Hawaiian War Chant, My Little Grass Shack, Kui Lei, and more. (Monaural, AFLP-1850) 5.95 value. **3.25**  
**PR-140** (Stereo, AFSD-5850) 6.95 value. **3.78**  
**PR-141** **3.78**

**VIENNESE WALTZES**—The charm of old Vienna is recreated for you by Joe Basile, his accordion and orchestra. You're invited to dance to such captivating tunes as Waltz Time in Vienna, Waltz Dream, Cafe Mozart. (Monaural, AFLP-1848) 5.95 value. **3.25**  
**PR-142** (Stereo, AFSD-5848) 6.95 value. **3.78**  
**PR-143** **3.78**

**ACCORDION D'ESPANA**—Jo Basile, his accordion and orchestra, recapture the spirit of sunny Spain—land of the bullfight, romance, lovely serenitas. Hear such favorites as Lady of Spain, El Relicario, Pamplonica. (Monaural, AFLP-1870) 5.95 value. **3.25**  
**PR-144** (Stereo, AFSD-5870) 6.95 value. **3.78**  
**PR-145** **3.78**

**AL MELGARD AT THE CHICAGO STADIUM ORGAN**—The brilliant high and dynamic lows of the theatre pipe organ—the world's largest with 40,000 pipes. Versatile Al Melgard plays Parade of the Wooden Soldiers, Battle Hymn of the Republic, and many more. (Monaural, AFLP-1886) 5.95 value. **3.25**  
**PR-146** (Stereo, AFSD-5886) 6.95 value. **3.78**  
**PR-147** **3.78**

**CHA CHA... CHA CHA CHA**—Played by the Marimba Chiapas, the foremost Marimba group of Mexico. Dance, or listen, to the infectious beat of Casita Linda, Cancero, Torero, El Monicero, and many more. (Monaural, AFLP-1900) 5.95 value. **3.25**  
**PR-148** (Stereo, AFSD-5900) 6.95 value. **3.78**  
**PR-149** **3.78**

**ITALIAN STREET SINGER**—Featuring the vibrant voice of Val Valenti. You'll thrill to the warmth and enthusiasm of the Italian Street Singer through such selections as Care 'ngrato, Mattinata, Tirilamba. (Monaural, AFLP-1902) 5.95 value. **3.25**  
**PR-150** (Stereo, AFSD-5902) 6.95 value. **3.78**  
**PR-151** **3.78**

**LEON BERRY** at the **GIANT WURLITZER PIPE ORGAN**—A highly versatile musician with a vast knowledge of the organ. Listen to his mastery of Darktown Strutters Ball, Lichtensteiner Polka, Frenesi. (Monaural, AFLP-1904) 5.95 value. **3.25**  
**PR-152** (Stereo, AFSD-5904) 6.95 value. **3.78**  
**PR-153** **3.78**

**LARRY ADLER**—Outstanding artistry... unequalled virtuosity in a display of talent never heard before. The most renowned harmonica master playing such selections as Summer Time, Blues in the Night, Genevieve. (Monaural, AFLP-1916) 5.95 value. **3.25**  
**PR-154** (Stereo, AFSD-5916) 6.95 value. **3.78**  
**PR-155** **3.78**

**DIXIELAND BANJO**—Featuring Dave Wierbach and his Dixieland hand. Hear the exciting banjo of the minstrel era, backed by the band, swing in the true dixieland manner. Limehouse Blues, Chinatown, etc. (Monaural, AFLP-1910) 5.95 value. **3.25**  
**PR-156** (Stereo, AFSD-5910) 6.95 value. **3.78**  
**PR-157** **3.78**

**HAMP'S BIG BAND**—None other than Lionel Hampton at the vibes... at his greatest. Hamp is fantastic with his big band in such outstanding jazz numbers as Air Mail Special, Night Train, Hamp's Boogie, Hey Ba Ba Re Bop. (Monaural, AFLP-1913) 5.95 value. **3.25**  
**PR-158** (Stereo, AFSD-5913) 6.95 value. **3.78**  
**PR-159** **3.78**

**EDDIE JACKSON**—The famous partner of Jimmy Durante struts out dixieland, honky-tonk, ballads and blues. Listen to the ever-livin' showman belt out Waitin' for the Robert E. Lee, Bill Bailey, and others. (Monaural, AFLP-1909) 5.95 value. **3.25**  
**PR-160** (Stereo, AFSD-5909) 6.95 value. **3.78**  
**PR-161** **3.78**

**DUKES OF DIXIELAND: CARNEGIE HALL CONCERT**—Join the enthusiastic and sellout audience of New York's Carnegie Hall for the "in-person" concert of the phenomenal Dukes. You too will acclaim their Austral Ramble, Royal Garden Blues, Moritat, etc. (Monaural, AFLP-1918) 5.95 value. **3.25**  
**PR-162** (Stereo, AFSD-5918) 6.95 value. **3.78**  
**PR-163** **3.78**

**JOHNNY PULEO: WESTERN SONGS**—Go west with Johnny Puleo and his Harmonica Gang. Hear the amazing talent of the mouth organ as the whole gang plays the all-time hits including Red River Valley, Yellow Rose of Texas, On Top of Old Smokey, and many more. (Monaural, AFLP-1919) 5.95 value. **3.25**  
**PR-164** (Stereo, AFSD-5919) 6.95 value. **3.78**  
**PR-165** **3.78**

**DEMONSTRATION AND SOUND EFFECTS RECORD**—An informative and fascinating demonstration of stereophonic reproduction of sounds including cannons, fire engines, subway trains, etc. Also includes a lecture and demonstration of stereo sound depth. (Stereo Only, AFSD-5890) 6.95 value. **3.78**  
**PR-166** **3.78**

**FIRST COMPONENT SERIES: STEREO TEST RECORD**—A must for all stereophiles, present and future. Special tests of separate bands for checking of speaker and amplifier, 30-15,000 cps frequency response, tone arm and stylus tracking, and others. Also has choice musical selections: reproduced in stereo. (Stereo Only, FCS-50,000) 6.95 value. **3.78**  
**PR-167** **3.78**

RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN  
ADD 35¢ PER ORDER FOR PACKING AND HANDLING



# RCA VICTOR



# LIVING STEREO

# With the

## WORLD'S GREATEST ARTISTS!

LIST ~~5.98~~

YOUR CHOICE  
OF ANY 5  
**13.79**

NOW **2.87** EACH

Shpg. wt., 1 lb. each disc



**LSC-2252 — VAN CLIBURN: TCHAIKOVSKY CONCERTO No. 1**—Acclaimed by the critics' poll as the "Best Concerto Recording of the Year." The pianist is accompanied by the orchestra under the Russian conductor Kiril Kondrashin. **STOCK NO. PR-235**

**LSC-1992 — HEIFETZ: BEETHOVEN VIOLIN CONCERTO**—Jascha Heifetz is joined by the Boston Symphony Orchestra, under the direction of Charles Munch, in bringing you an unforgettable interpretation of Beethoven's major violin works—Concerto in D, opus 61. **STOCK NO. PR-236**

**LSC-2265 — THE RUBINSTEIN STORY**—The master of the keyboard, Artur Rubinstein, plays two of Chopin's masterpieces—Concerto No. 2, and Andante Spianato and Grande Polonaise. With the Symphony of the Air. **STOCK NO. PR-237**

**LSC-2124 — RUBINSTEIN: BEETHOVEN'S CONCERTO No. 5 (EMPEROR CONCERTO)**—Artur Rubinstein and the Symphony of the Air, in Beethoven's most popular piano concerto, No. 5 in E flat major. **STOCK NO. PR-238**

**LSC-2318 — ROSSINI OVERTURES**—Classic performance of classic Rossini masterpieces, brilliantly recorded by Fritz Reiner and the Chicago Symphony Orchestra. Overture from William Tell, Barber of Seville, others. **STOCK NO. PR-239**

**LSC-2302 — GILBERT AND SULLIVAN OVERTURES**—These 6 overtures to Gilbert and Sullivan entertainments are triple-gala compositions because they are festive as preludes, as souvenirs, as instrumental pieces. You'll recognize The Mikado, H. M. S. Pinafore, etc. **STOCK NO. PR-240**

**LSC-2112 — VIENNA**—Fritz Reiner and the Chicago Symphony take you to beautiful Vienna for waltz-time. Emperor Waltz, Village Swallows, etc. **STOCK NO. PR-241**

**LSC-2299 — WALTZES OF FRANZ LEHAR**—An excellent library of waltz melodies comprising airs in many moods, by the London Proms Symphony. Wild Roses, Eva, Gypsy Love, more. **STOCK NO. PR-242**

**LSC-2313 — VENICE**—Venice, the dazzling operatic center, is the inspiration for this album by the Orchestra of the Royal Opera House, Covent Garden, Georg Solti conducting. Excerpts from La Traviata, La Gioconda, etc. **STOCK NO. PR-243**

**LSC-2343 — BEETHOVEN: SYMPHONY No. 5**—This widely acclaimed performance is brought to you in living stereo. Fritz Reiner conducts the Chicago Symphony Orchestra. Also includes Beethoven's Carliolan Overture. **STOCK NO. PR-244**

**LSC-2323 — CAPRICCIO ITALIEN/CAPRICCIO ESPAGNOL**—Kiril Kondrashin, famous Russian conductor, leads the RCA Victor Symphony in two works by Rimsky-Korsakoff and Tchaikovsky. **STOCK NO. PR-245**

**LSC-2195 — BILLY THE KID/RODEO** — A recording triumph. Morton Gould and his orchestra give you his rendition of Aaron Copland's two famous ballets—Billy the Kid, and Rodeo. **STOCK NO. PR-246**

**LSC-2325 — MUSIC FOR FRUSTRATED CONDUCTORS**—With this album you get a free baton, and the chance to make believe you're conducting the Mexican Hot Dance, Sabre Dance, and others. **STOCK NO. PR-247**

**LSC-2270 — POPS STOPPERS**—A collection of arrestingly brilliant music as presented by Arthur Fiedler and the Boston Pops. Show stoppers include In a Persian Market, Jalousie, Liebestraum. **STOCK NO. PR-248**

**LSC-2100 — HI-FI FIEDLER**—Arthur Fiedler conducts the Boston Pops in revitalized, re-sensitized, hi-fi versions of Le Coq D'Or, William Tell Overture, Marche Slave, and others. **STOCK NO. PR-249**

**LSC-2229 — MARCHES IN HI-FI**—The steady, ready, sturdy surge of music in motion as presented by Arthur Fiedler and the Boston Pops. Grand March from Aida, March of the Toys, Colonel Bogey, etc. **STOCK NO. PR-250**

**LSC-2294 — SLAUGHTER ON TENTH AVENUE and Other Selections**—Arthur Fiedler and the Boston Pops brings you the best in modern ballet in brilliant sound. Excerpts from Fancy Free, Interplay. **STOCK NO. PR-251**

**LSC-2295 — STEPHEN FOSTER SONG BOOK**—Some of the best from the mighty pen of Stephen Foster as presented by the Robert Shaw Chorale. Beautiful Dreamer, Old Black Joe, others. **STOCK NO. PR-252**

**LSC-2335 — VICTORY AT SEA (Vol. I)**—Richard Rodgers memorable and moving suite from the score of the NBC Television Production, arranged and conducted by Robert Russell Bennett with the RCA Victor Symphony. This suite is divided into nine movements. **STOCK NO. PR-253**

**LSC-2226 — VICTORY AT SEA (Vol. II)**—A selection of themes and melodies that is a natural sequel to the first album, which it supplements without repeating. Richard Rodgers score arranged and conducted by Robert Bennett. **STOCK NO. PR-254**

**LSC-2340 — PORGY AND BESS/WEST SIDE STORY**—Robert Russell Bennett conducts the RCA Victor Symphony in a vivid demonstration of American dramatic music from the scores of Porgy and Bess and West Side Story. **STOCK NO. PR-255**

**LSC-2308 — DOUBLING IN BRASS**—Morton Gould and his symphonic band present brilliant band music in abundance. Included are some of Mr. Gould's own compositions. Jericho, American Patrol, Yankee Doodle, others. **STOCK NO. PR-256**

**LSC-2367 — GERSHWIN: Rhapsody in Blue, American in Paris—Two Gershwin hits as played by Arthur Fiedler and the Boston Pops.** On the piano, Earl Wild—listen and you'll discover today's greatest Gershwin interpreter. **STOCK NO. PR-257**

**LSC-1032 — SOUTH PACIFIC**—The original soundtrack recording of the Rodgers & Hammerstein hit with Rossano Brazzi, Mitzel Gaynor, John Kerr and the singing voice of Giorgio Tozzi. **STOCK NO. PR-258**

**LSC-2339 — MARIO LANZA: THE STUDENT PRINCE**—The great Lanza in one of his last and finest performances of Sigmund Romberg's operetta. Deep In My Heart Dear, Beloved, more. **STOCK NO. PR-259**

**LSC-2338 — MARIO LANZA: FOR THE FIRST TIME**—Mario is more exciting than ever in selections from the original soundtrack of his hit film. For the First Time. Songs include O Sole Mio, Vesti La Giubba, Ave Maria. **STOCK NO. PR-260**

**LSC-6006 — BELAFONTE AT CARNEGIE HALL**—On April 19 and 20, 1959, before a packed Carnegie Hall, Harry Belafonte made history. You'll hear him for the first time at Carnegie Hall, you'll hear an exhilarated audience, you'll hear his spontaneous sarcery with an audience. You'll hear it live. Hits include John Henry, Day O, Jamaica Farewell, Shenandoah, Matilda. **PR-261 (2 records) Net 5.74**

RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN  
ADD 35¢ PER ORDER FOR PACKING AND HANDLING



LIST ~~4.98~~  
NOW **2.59** EA  
Shpg. wt., 1 lb. each disc

ANY 5  
**12.39**

**LSP-6005 — AN EVENING WITH LERNER AND LOEWE**—A musical spectacular from the hits of the top Broadway theater team, Lerner and Loewe. RCA Victor Symphony Orchestra and Chorus in excerpts from Gigi, Brigadoon, Paint Your Wagon, My Fair Lady. Two LP records. **Net 5.18 PR-262**

**LSP-2010 — COMO SWINGS**—The nation's No. 1 singer brings you songs with a definite beat, backed by Mitchell Ayres and his Orchestra. St. Louis Blues, Linda, Mood Indigo, more. **STOCK NO. PR-263**

**LSP-1971 — SATURDAY NIGHT WITH MR. C**—A re-creation of Perry's TV show featuring his most-requested songs. Mitchell Ayres' orchestra joins him in Love Letters, Whiffenpoof Song, others. **STOCK NO. PR-264**

**LSP-1738 — JEANETTE MacDONALD AND NELSON EDDY FAVORITES**—A brand-new recording by America's best-loved duo featuring their all-time hits: Indian Love Call, Ah Sweet Mystery of Life, Wanting You, Rosalie, and more. **STOCK NO. PR-265**

**LSP-1998 — THE AMES BROTHERS SING THE BEST IN THE COUNTRY**—You'll recognize everyone of these hit songs presented in the favorite style of the leading singing group, the Ames Brothers. Love Me Tender, Someday, etc. **STOCK NO. PR-266**

**LSP-1852 — THE MILLER SOUND**—The New Glenn Miller Orchestra perfectly recreates the sound of the swing-master. Ray McKinley directs in Greensleeves, You Smiled, The Lady is a Tramp, more. **STOCK NO. PR-267**

**LSP-1000 — MUSIC FOR DINING**—Sweet music, easy to digest, from the Melachrino Strings and Orchestra. Smooth favorites include Too Young, September Song, Domino, Tenderly, and more. **STOCK NO. PR-268**

**LSP-1905 — TWO SIDES OF WINTERHALTER**—Versatility abounds from Hugo Winterhalter and his Orchestra as they play classical favorites and popular hit tunes. Warsaw Concerto, Gigi, One O'Clock Jump, and more. **STOCK NO. PR-269**

**LSP-1978 — EXPLORING NEW SOUNDS IN STEREO**—The master of exciting orchestral color finds new melodic worlds to view. Equival in My Blue Heaven, Lozy Bones, Spellbound, more. **STOCK NO. PR-270**

**LSP-1866 — MUSIC FOR BANG, BARRROOM AND HARP**—The wildest sounds this side of Cape Canaveral yet thoroughly delightful music from Dick Schory. April in Paris, Baia, and more. **STOCK NO. PR-271**

**LSP-2125 — MUSIC TO BREAK ANY MOOD**—Dick Schory's percussion ensemble in an album which can establish or shatter a great gamut of moods. Instruments are stroked, plucked, poked or banged. Caravan, Tortilla, more. **STOCK NO. PR-272**

**LSP-1944 — MARCHING DOWN BROADWAY WITH THE BAND OF THE COLD-STREAM GUARDS**—The tingling excitement that only a crack band like the "Guards" can evoke—76 Trombones, Lida Rose, and more. **STOCK NO. PR-273**

**LSP-2070 — STICKS AND BONES**—A great musical talent of our time for percussion sounds and rhythms. Marty Gold and his Orchestra present Hall of the Mountain King, Love for Sale, etc. **STOCK NO. PR-274**

**LSP-1869 — SUPERSONICS IN FLIGHT**—A truly unique supersonic flight into space with Billy Mure's Supersonic Guitars. What Is This Thing Called Love, Symphony, 3rd Man Theme, more. **STOCK NO. PR-275**

**LSP-1900 — THE KEYS AND I**—An unforgettable trip across the 88 keys by the master, Eddie Heywood, with Joe Reisman and his Orchestra. Land of Dreams, All the Way, Hurricane, and more. **STOCK NO. PR-276**

**LSP-1868 — 37 FAVORITES FOR DANCING**—Frankie Carle and his Rhythm in a party-load of favorite songs for dancing. Try them all: Shadow Waltz, Embraceable You, Tea for Two, more. **STOCK NO. PR-277**

**LSP-1909 — ARTHUR MURRAY'S MUSIC FOR DANCING**—The dancing master presents dance music and lessons from rock-n-roll to waltzes. Deep Purple, Lisbon Antigua, Sway, and more. **STOCK NO. PR-278**

**LSP-1956 — THE MUSIC FROM PETER GUNN**—From the hit TV show Henry Mancini conducts the cool-mood swing he created. Peter Gunn, Sorta Blue, Dreamsville, Fallout, and more. **STOCK NO. PR-279**

**LSP-2040 — MORE MUSIC FROM PETER GUNN**—If you liked the first album, you'll love this one. Henry Mancini conducts the Orchestra in Walkin' Boss, My Manne Shelly, Timothy, more. **STOCK NO. PR-280**

**LSP-2103 — MISTER GUITAR**—You'll be amazed that a guitar can do so much, especially when played by Chet Atkins. Hits include Hello Bluebird, Shaw Me The Way To Go Home, Rainbow, others. **STOCK NO. PR-281**

**LSP-2058 — PIANO ROLL DISCOVERIES**—Famous songs composed for the piano, played on the piano, by famous pianists. Rhapsody in Blue, Whose Baby Are You, Nola, Smiles, and more. **STOCK NO. PR-282**

**LSP-1676 — UNDER WESTERN SKIES**—George Melachrino and his Orchestra invites you to mosey along in the big, wide, wonderful west. Try these favorites: Wagon Wheels, Cool Water, etc. **STOCK NO. PR-283**

**LSP-1911 — CAREFREE POLKAS**—It's polka time when Johnny Vadaln and his Orchestra start to play. Laughing Sailor, Ginger Polka, and more. **STOCK NO. PR-284**

**LSP-2028 — POPS AND PRADO**—Perez Prado and his Orchestra in a new collection of favorites. Isle of Capri, Manhattan, to name a few. **STOCK NO. PR-285**

**LSP-1894 — CUGAT IN SPAIN**—Combine the fine rhythm of Xavier Cugat and his Orchestra with the fiery music of gay Spain for an album of musical favorites. Selections include Malagueña, Ritual Fire Dance, others. **STOCK NO. PR-286**

**LSP-1617 — TOP PERCUSSION: TITO PUENTE**—An album of Latin percussion and terrific sounds containing the efforts of some of the greatest percussionists in this country. Elaquana, Bragada, Ti Man Bo, Mon-Ti, and more. **STOCK NO. PR-287**

**LSP-2087 — THE DANCING BEAT OF THE LATIN BANDS**—The catchy Latin American beat of six favorite Latin bands—Puente, Cugat, Prado, Garcia, Arcaraz. Tunes include Baia, Carioco, Adias, more. **STOCK NO. PR-288**

**LSP-1757 — STRAUSS WALTZES**—The Melachrino Orchestra in a collection of famous Strauss waltzes to start you up in 3/4 time. The Blue Danube, Wine, Women and Song, Emperor Waltz, etc. **STOCK NO. PR-289**

**LSP-1926 — MEMORIES OF POPULAR OPERAS**—George Feyer in a delightful new interpretation of arias. Deft, tasteful piano "Feyer-works." Excerpts from Carmen, La Boheme, La Traviata, etc. **STOCK NO. PR-290**

**LSP-2150 — JAMES MICHENER'S FAVORITE MUSIC OF HAWAII**—These well known Hawaiian tunes will be your favorites too. Aloha Oe, Hawaiian War Chant, Sweet Lili-ani, Wedding Song, more. **STOCK NO. PR-291**

## TOSCANINI CARUSO

RCA VICTOR MONAURAL  
2-RECORD ALBUMS

YOU SAVE **3.98** EACH  
SALE PRICE **5.98**  
LIST ~~9.96~~



**LM-6009 — TOSCANINI: BEETHOVEN SYMPHONIES 1 and 9**—Arturo Toscanini, his golden baton, and the NBC Symphony in the definitive interpretation of Beethoven Symphonies 1 and 9. With the voices of Eileen Farrell, Jan Pearce, Robert Shaw Chorale. Shpg. wt., 2 lbs. **STOCK NO. PR-292**



**LM-6036 — THE BEST OF CARUSO**—The best recordings of Enrico Caruso, tenor—the greatest singer of his time, perhaps of all time. These recordings tell you why his hold on the public is undiminished a generation after his death. Celeste Aida, La Donna E Mobile, more. Shpg. wt., 2 lbs. **STOCK NO. PR-293**

RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN  
ADD 35¢ PER ORDER FOR PACKING AND HANDLING

# Mercury STEREO RECORDS ... INCLUDING MANY NEW RELEASES at LESS THAN HALF-PRICE!



★ CLASSICALS ★ POPS ★ NOVELTIES  
★ INSTRUMENTALS ★ SHOW TUNES

Reg. 5.98

**2.89**  
EACH

Shpg. wt., 1 lb. each disc

SET OF FIVE  
**13.49**  
Reg. Value 29.90

Leave it to Lafayette to give you this wonderful opportunity to stock your own personal record collection with these much-wanted Mercury 12" Stereo LP's. AT LESS THAN HALF-PRICE! The LARGEST and BEST assortment of Mercury stereo discs to satisfy every musical taste. These are BRAND NEW FACTORY-FRESH wanted recordings by TOP NAME ARTISTS. Lowest priced at \$2.89 each, you can SAVE STILL FURTHER by selecting FIVE for \$13.49. Get your order in fast while stocks are complete. Please indicate second choices. Include postage with your order — allowing 1 lb. per disc.

**SR60000 — RICHARD HAYMAN CUBAN FAVORITES** — 9 selections include Tropical Merengue, Love and the World Loves With You, Caminito, Rhapsodero, La Camparso. . . . . STOCK NO. PR-110.

**SR60001 — LET'S DANCE, DAVID CARROLL & ORCH.** — A dozen delightful tunes including Cuddle Up a Little Closer, The Trouble With Harry, Let's Dance, The Glow Worm, Armen's Theme, Puerto Rican Pedlar. . . . . STOCK NO. PR-111.

**SR60021 — WE COULD HAVE DANCED ALL NIGHT** — Dance treats by Griff Williams and his orchestra, includes I Got A Kick Out of You, I Know That You Know, Isn't This A Lovely Day, Let's Fly Away. . . . . STOCK NO. PR-112.

**SR60055 — POLKA TIME** — 40 minutes of accordionist Dick Contino in Pennsylvania Polka, Beer Barrel Polka, Hand Clap Polka, Hot Pretzels and Liechtensteiner Polka. . . . . STOCK NO. PR-113.

**SR-60029 — REPERCUSSION** — David Carroll and his Orchestra present something new in percussions—each selection features one category of percussion instruments. The Peanut Vendor, La Paloma, etc. . . . . STOCK NO. PR-296.

**SR-60061 — HARMONICHA CHA CHA** — The Harmonicas go cha cha with their harmonica. Old favorites in cha cha time include Peg O' My Heart, Perfidia, Chaitanaga Cha Cha, Frenesia, etc. . . . . STOCK NO. PR-297.

**SR-60090 — SQUEEZE ME!** — Dick Contino and his accordion in contagious, exciting music as he tries original approaches to these great standard melodies: Yesterday, Dream, Blue Moon, more. . . . . STOCK NO. PR-298.

**SR-60103 — CARAMBA** — Richard Hayman and his Orchestra take you to the land of the matador—Spain. You'll hear original Spanish music including Jalousie and the famous Bullfighter's Entry Music (La Virgen de la Macarena). . . . . STOCK NO. PR-299.

**SR60056 — JOHN CALI, THE BANJO MINSTREL MAN** — Banjo, barber shop quartet, trombones and tuba accompany this artist in By The Light of The Silvery Moon, Somebody Stole My Gal, Waiting For The Robert E. Lee, and others. . . . . STOCK NO. PR-114.

**SR60065 — SONGS FROM GREAT SHOWS** — Clebonoff Strings play 12 favorites including I've Grown Accustomed to Her Face (My Fair Lady), Bali Hai (South Pacific), They Say It's Wonderful (Annie Get Your Gun) and others. . . . . STOCK NO. PR-115.

**SR60068 — OLDIES BUT GOODIES** — Griff Williams plays old and new favorites — Tea For Two, Moonlight Serenade, Oh You Beautiful Doll, Brazil, Three Little Wards, and many others. . . . . STOCK NO. PR-116.

**SR60082 — JAN AUGUST** — A dozen piano Cha-Cha selections including You're The Cream in My Coffee, Boogie Woogie Cha Cha, etc. . . . . STOCK NO. PR-117.

**SR-60110 — THE MAGIC OF SARAH VAUGHAN** — Sarah has the voice! She employs that God-given instrument on a potpourri of pops and minor jazz classics. Songs include That Old Black Magic, Mory Conroy, Careless, more. . . . . STOCK NO. PR-300.

**SR-60115 — BREEZIN' ALONG** with the BREEZE — With impeccable taste and superb piano artistry, Eddie Heywood captures the magic of the wind in all its enchantment from breezes of Spring to winds of Autumn. The Breeze and I, Whispering Wind, etc. . . . . STOCK NO. PR-301.

**SR-60152 — LET'S DANCE AGAIN!** — David Carroll and his Orchestra provide music for dancing pleasure or just plain listening. Pretty Baby, Play A Simple Melody, Adios, and more. . . . . STOCK NO. PR-302.

**SR-60162 — MORE SONGS FROM GREAT FILMS** — The first melding of the famed Clebonoff strings with brass in an array of songs that speak for themselves. All The Way, Secret Love, Anna, more. . . . . STOCK NO. PR-303.

**SR90001 — CARMEN SUITE** — Music from Carmen and the L'Arlesienne Suites No. 1 and 2 with Paul Paray conducting the Detroit Symphony Orchestra. . . . . STOCK NO. PR-118.

**SR90002 — RHAPSODY IN BLUE** — Eugene List in Gershwin's immortal Rhapsody and Concerto in F. Eastman-Rochester Symphony Orchestra under direction of Howard Hanson. . . . . STOCK NO. PR-119.

**SR90005 — BOLERO** — The famous Ravel Work plus Ravel's Mather Goose Suite and Chabrier's Bourree Fantasque, directed by Paul Paray. . . . . STOCK NO. PR-120.

**SR90009 — MUSIC OF LEROY ANDERSON, VOL. 1** — Frederick Fennell arranges and conducts the Eastman-Rochester POPS orchestra in Sleigh Ride and Bugler's Holiday, Sandpaper Ballet, Irish Suite, Serenade, Forgotten Dreams and many others. . . . . STOCK NO. PR-121.

**SR-60177 — THE SOUND OF MUSIC** — Richard Hayman and his Orchestra play Rodgers and Hammerstein's latest Broadway triumph, The Sound of Music. Songs include Maria, Do-Re-Mi, more. . . . . STOCK NO. PR-304.

**SR-60179 — ORIGINAL TV MUSIC FROM WAGON TRAIN** — Each selection successfully sets the mood of the scene for which it was written, as well as stands by itself as a musical composition. . . . . STOCK NO. PR-305.

**SR-80015 — MAX ROACH with the BOSTON PERCUSSION ENSEMBLE** — Max Roach, jazz' foremost drummer, combines with the Boston Percussion Ensemble to provide an exciting excursion into the world of Percussion. Music Inn Suite, etc. . . . . STOCK NO. PR-306.

**SR-90043 — MUSIC OF LEROY ANDERSON (Vol. II)** — Frederick Fennell and the Eastman-Rochester "Pops" Orchestra perform a dozen of Anderson's amiable and inventive pieces. Syncopated Clock, Blue Tango, more. . . . . STOCK NO. PR-307.

**SR90016 — GAITE PARISIENNE** — Antal Dorati and Minneapolis Symphony Orchestra in Offenbach's Ballet and the ballet from Strauss' Graduation Ball. . . . . STOCK NO. PR-122.

**SR90049 — GRAND CANYON AND MISSISSIPPI SUITES** — Symphonic tone poems by Ferde Grofe played by Epstman-Rochester Orchestra, conducted by Howard Hanson. . . . . STOCK NO. PR-123.

**SR90105 — MARCHING ALONG** — Stirring rendition of a dozen famous marches, including The Stars and Stripes Forever, The U. S. Field Artillery, El Capitan, On The Mall, Washington Post, American Patrol and others. . . . . STOCK NO. PR-124.

**SR90109 — BOARDWALK PIPES** — Robert Elmore at the world-famous Atlantic City Convention Hall organ. Numbers include Stars and Stripes Forever, Liebesfreud, Squirrel, Caprice Viennois, Marche Champetre, Stars in My EYES, Old Refrain, Fantasy on Nursery Themes and many others. . . . . STOCK NO. PR-125.

**SR-90134 — FIESTA IN HI-FI** — Howard Hanson conducts the Eastman-Rochester Orchestra in folk songs and dance rhythms from Mexico, Virginia and the Kentucky mountains. Mexican Rhapsody, Savannah River Holiday, etc. . . . . STOCK NO. PR-308.

**SR-90160 — SUPPE OVERTURES** — Six of Franz von Suppe's sparkling overtures are served up in this collection by the Halle Orchestra under Sir John Barbirolli. Poet and Peasant, Light Cavalry, Jolly Robbers, and others. . . . . STOCK NO. PR-309.

**SR-90172 — AARON COPLAND** — Antal Dorati conducts the Minneapolis Symphony Orchestra in three of the best of Copland. Rodeo, Four Dance Episodes, El Salon Mexicano, Danzon Cubano. . . . . STOCK NO. PR-310.

**SR-90203 — BOUQUET DE PARAY** — Paul Paray conducts the Detroit Symphony Orchestra in four of his favorite musical flowers. William Tell Overture, Danse Macabre by Saint-Saens, more. . . . . STOCK NO. PR-311.

**SR90122 — BORODIN** — Palavetian Music from "Prince Igor" performed by Minneapolis Symphony Orchestra and large chorus under direction of Antal Dorati Paired with Rimsky-Korsakov's Le Coq D'Or Suite. . . . . STOCK NO. PR-126.

**SR90156 — VERDI** — Five overtures and preludes played by London Symphony Orchestra, conducted by Antal Dorati. Forza del Destino, Vespri Siciliano, Nabucco, Traviata. . . . . STOCK NO. PR-127.

**SR90170 — MARCH TIME** — Eleven Marches played by Eastman Symphonic Wind Ensemble conducted by Frederick Fennell including Guadalcanal March, Illinois March, March Grandioso, Americans We, The Mad Major. . . . . STOCK NO. PR-128.

**SR90195 — RIMSKY-KORSAKOFF** — Scheherazade, Symphonic Suite Op. 35 played by Minneapolis Symphony Orchestra with Rafael Drubin violin interpretations and conducted by Antal Dorati. . . . . STOCK NO. PR-129.

**SR-90211 — VIVE LA MARCHÉ!** — Paul Paray and the Detroit Symphony Orchestra prove that the march is the province of the orchestra, not the band. Caranlian March, La Marseillaise, more. . . . . STOCK NO. PR-312.

**SR-90217 — MOUSSORGSKY: PICTURES AT AN EXHIBITION** — Antal Dorati conducts the Minneapolis Symphony Orchestra in ten pictures from Moussorgsky's famous works. Also includes Prelude and Dance of Persian Slaves from Khavanshchina. . . . . STOCK NO. PR-313.

**SR-90219 — COUNTRY GARDENS** and other favorites by PERCY GRAINGER — Frederick Fennell conducts the Eastman-Rochester "Pops" in some of the most loved hits of Percy Grainger—Children's March, Mack Morris, and more. . . . . STOCK NO. PR-314.

**SR-90222 — POP-OVERS** — Frederick Fennell and the Eastman-Rochester "Pops" assemble an appealing sampler of indestructible masterpieces of a "pops" orchestra repertory. Liebestraum, Hora Staccato, Clair de Lune, etc. . . . . STOCK NO. PR-315.

RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN  
ADD 35¢ PER ORDER FOR PACKING AND HANDLING



## "LIVING PRESENCE" HI-FIDELITY RECORDS!

LIST 4.98 Shpg. wt., 1 lb. each disc  
**ONLY 2.47 EACH**  
COMPLETE SET OF FIVE **11.85**

**MG-50075 — LATIN-AMERICAN SYMPHONETTE** — Howard Hanson conducts the Eastman-Rochester Symphony Orchestra in works by Martin Gould and Samuel Barber. Adagio for Strings, and more. . . . . STOCK NO. PR-316.

**MG-50080 — MARCHES: JOHN PHILIP SOUSA** — Frederick Fennell conducts the Eastman Symphonic Wind Ensemble in a widely varied selection of marches headed by eight masterpieces by John Philip Sousa. Sempar Fidelis, Cheerio, more. . . . . STOCK NO. PR-317.

**MG-50118 — TCHAIKOVSKY: AURORA'S WEDDING/BLACK SWAN SCENE** — Antal Dorati with the Minneapolis Symphony Orchestra in two selections from Tchaikovsky's famous ballets: Sleeping Beauty, Swan Lake. . . . . STOCK NO. PR-318.

**MG-50144 — HI-FI A LA ESPANOLA** — The Old and New World meet in this colorful program by the Eastman-Rochester "Pops" Orchestra under the baton of Frederick Fennell. Brazilian Sleigh Bells, Malagueña, and more. . . . . STOCK NO. PR-319.

**MG-50166 — BRAVO HI-FI** — The inspiration for the three exciting scores recorded by Howard Hanson and the Eastman-Rochester Symphony stems from Cuba (Cuban Overture), (Mexico Mexican Rhapsody), Argentine (Latin American Symphonette). . . . . STOCK NO. PR-320.

RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN  
ADD 35¢ PER ORDER FOR PACKING AND HANDLING

RCA VICTOR LM-6074  
**AMAZING OFFER OF RCA VICTOR RECORDS 1.69** 5.98 Value

60 YEARS OF "MUSIC AMERICA LOVES BEST"  
This special 2 record monophonic set contains a fabulous cavalcade, featuring outstanding performances by these musical immortals.

CARUSO	TOSCANINI	ARTIE SHAW
RUBINSTEIN	JAN PEERCE	TOMMY DORSEY
MARIO LANZA	HEIFETZ	PERRY COMO
PADEREWSKI	STOKOWSKI	AMES BROTHERS
JOSE ITURBI	BENNY GOODMAN	DUKE ELLINGTON
PAUL WHITEMAN	GLENN MILLER	HARRY BELAFONTE
	AND OTHERS	

PR-102 2 Record Set — Shpg. wt., 2 lbs. . . . . Net **3.38**

1812 OVERTURE AND BOLERO STEREO RCA VICTOR LSC-2345  
ORCHESTRA AND BAND WITH CANNON AND BELLS CONDUCTED BY MORTON GOULD  
A new exciting stereo recording rich in sonic splendor. The record surface contains a new, revolutionary antistatic ingredient which repels dust.  
PR-101 1812 Shpg. Wt., 1 lb. . . . . Net **1.69**

**3.38** 2 RECORDS

RCA VICTOR LSC-2345

RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN  
ADD 35¢ PER ORDER FOR PACKING AND HANDLING

# MICROPHONES *Fine Quality Save from 50% to 75% !!!* At History Making Prices!

## HIGH QUALITY TOP NOTCH CRYSTAL MICROPHONE



COMPARE IT WITH ANY MIKE AT 2 TO 3 TIMES THE PRICE

3.95 each singly, ea.  
In lots of 3 4.25

Lafayette makes history with a high quality CRYSTAL MICROPHONE at a price that is 60% less than any comparable Crystal Microphone on the market today. Excellent for PA systems, home recorders and general applications. Frequency response 30 to 10,000 cycles. Output level—52 db. Provides ample output for use with low gain amplifiers. Uses quality moisture sealed crystal. Die cast case in rich green baked enamel finish, with chrome grill. Completely equipped with 5 feet of shielded cable. Mike may be used on any stand with 3/4"-27 thread. Grill diameter 2 1/4", depth 4/4", height 4 1/2". Shpg. Wt. 3 1/2 lbs.

PA-24—In lots of 3, each 3.95  
Singly, each 4.25

## STUDIO CRYSTAL MICROPHONE

- DUAL CRYSTAL CARTRIDGES
- ALL DIRECTIONAL
- FINE QUALITY
- HIGH OUTPUT



5.75

Here is a microphone with a 360° pickup, and the added power and sensitivity of two individually shock mounted and phased crystal cartridges. This arrangement assures you of maximum pickup from all sides. Swivel mounted to give fuller flexibility. Case is chrome plated. Standard 3/4"-27 thread. Overall size 7" H x 3" W complete with 4 ft. cable. Shpg. wt. 4 lbs.

PA-17 Net 5.75

## NEW! TOP QUALITY CRYSTAL MIKE




2.95

A new, attractively styled crystal microphone for all general applications such as public address and home recording—at a history making low price! Frequency response 30-10,000 cycles. Output level—52 db. Tilting head, attractive plastic case. Can be used on any stand with 3/4"-27 thread. Completely equipped with 5 ft. plastic covered shielded cable. Grill diam. 2 1/4", depth 3 1/2", height 4". Shpg. wt., 2 lbs. One of the best buys in the country!

PA-42 Net 2.95

## NEW CONTACT MICROPHONE 1.95

Easily Attaches to All String Instruments



This low priced, high quality contact microphone is ideal for amplification of single for amplification of single for stringed instruments such as guitars, banjos, mandolins, cellos, ukuleles, etc. Provides rich, natural reproduction of the actual tone with sufficient amplification to be heard in a large hall. The clamp bar on the mike slides directly under the sounding board cutout to give a secure fit. Comes equipped with 8 ft. cable for connection to public address amplifiers, tape recorders or radios. Frequency response 40-9,000 cps. High impedance. Size: 1 1/2" L, 1 5/16" W, 5/16" D. Shpg. wt., 12 ozs.

PA-41 Net 1.95

## SLIM CRYSTAL MICROPHONE



A slim crystal microphone for desk top or hand-held use that is uniquely designed for universal application, smartly styled and attractively finished. Changes in temperature and humidity do not affect its efficiency, nor does increasing the cable length increase noise or change frequency characteristics. Ingenious swivel mounting permits horizontal and vertical rotation for most convenient angle of use. Microphone easily removed from base for holding in hand. Microphone, base, grill and all fittings are chrome finished. Has a wide range smooth frequency response and an omni-directional polar pattern. Built-in locking type on-off slide switch. Microphone is only 5" long x 1" max. dia. Shpg. wt., 2 lbs.

PA-45—Microphone Complete with Stand.....Net 3.95

## NEW "DYNA-SLIM" MICROPHONE

- HIGH IMPEDANCE — 50,000 OHMS
- ON-OFF SWITCH
- "QUICK-SLIP" ADAPTER

6.95

New dynamic, high output microphone with all the features of "mikes" costing 3 times Lafayette's price! Output level—55 db. Smooth response from 60 to 10,000 cycles. Omnidirectional head. External on-off switch. Slips on or off stand adapter in a wink. Standard 3/4"-27 adapter permits tilting mike for multi-angle use. Satin black and chrome finish. Complete with detachable cable and connector. 8" long, 1 1/4" max. dia. tapered barrel 7". Shpg. wt., 2 lbs.

PA-43.....Net 6.95

## 3 WAY SLIM CRYSTAL MICROPHONE



- May be hand-held, stand mounted or suspended by lavalier cord
- Frequency 60-10,000 CPS
- On-Off Switch

A tremendous value! Unique design, only 4 1/4" L x 1 1/4" diam. Comes complete with swivel adapter to fit all standard mike stands, and lavalier cord and bracket which leaves both hands free. Smooth wide range response. Locking type on-off slide switch. Detachable 7 ft. cable and connector. Shpg. wt. 2 lbs.

PA-31 Net 3.95  
Singly, Each 3.95

## LAPEL MICROPHONE

- Full — 55 db. OUTPUT LEVEL
- IDEAL GENERAL PURPOSE MIKE

1.95



Ideal general purpose mike. Specially engineered crystal Microphone. Attaches to lapel. Only 1 3/4" in diameter. Exceptional frequency response. Output level — 55 db. Chrome plated case and clip for attaching to lapel. Includes 5 ft. of shielded cable. Shpg. wt. 1 lb.

PA-9 Net 1.95

## NEW! HAM, CITIZEN BAND and recording crystal mike



3.95

Extremely versatile, high output crystal microphone featuring ultra smart design with attractive chrome grille. Exceptionally lightweight metal case in metallescent finish. Has push to talk switch and is ideal for ham, short wave and citizen band transceivers as well as for intercom and recording. Has removable bracket to facilitate hanging microphone on side of equipment; fits snugly in palm of hand. Response 60-9000 cps. Output, —55 db. high impedance. 5 ft. microphone shielded cable. 3 1/4" x 2 1/4" x 7/8". Shpg. Wt., 1 lb.

PA-76 Net 3.95

## NEW! CRYSTAL THROAT MICROPHONE

- HIGH SENSITIVITY—HIGH OUTPUT • FOR USE WITH ANY AMPLIFIER OR TRANSMITTER WITH CRYSTAL MIKE INPUT • IDEAL FOR AIRCRAFT, AMATEUR, INDUSTRIAL COMMUNICATIONS, AUCTIONS, PITCHMEN, CARNIVALS, SALESMEN
- COMPLETE WITH NECKSTRAP—LEAVES HANDS FREE!

A crystal throat microphone with a myriad of uses! Its high sensitivity and high output permits its use with any standard high impedance crystal microphone input. Its relatively wide frequency range provides a high degree of intelligibility for voice in public address or communications work. Requires no special power supply as do carbon-type throat mikes. Complete with flexible neckband and flexible 5 1/2' cable (less connector). Shpg. wt., 1/2 lb.

PA-14.....Net 1.95

## SLIM DYNAMIC MICROPHONE

- DUAL IMPEDANCE 50,000 AND 250 OHMS
- HIGH OUTPUT
- 50-11,000 CYCLES
- USE ON STAND OR AS HAND MIKE

The latest design in slim type microphones. A high-output dynamic mike of exceptional quality. Has very smooth response from 50-11,000 cycles. Built-in external switch gives you choice of either high impedance (50,000 ohms) or low impedance (250 ohms). Omni-directional tiltable head. Bracket has standard 3/4"-27 thread for use on stand. This bracket is instantly removable so mike can be hand-held. Has cast satin-chrome finish and acoustically correct grille head. Ruggedly constructed. Size: 8" long, 1 1/4" diam. barrel. Shpg. wt., 2 lbs.

PA-29 In lots of 3, Each 9.25  
Single, Each 9.95

## NEW DYNAMIC MICROPHONE FOR DESK-TOP, HAND HELD, OR LAVALIER USE



- Reg. Value 29.50—NOW! only 6.95
- HIGH IMPEDANCE—50,000 OHMS
- RESPONSE—40-9,500 cps

Beautifully designed and attractively finished high impedance, light weight dynamic microphone with swivel head that permits horizontal and vertical rotation for most convenient angle. Microphone quickly and easily released from felt-lined base clamp for holding in hand for clamping to neck band for use as lavalier microphone or for clamping to desk with chrome finished base, grille and fittings. Ruggedly constructed to withstand plenty of handling. 3" long x 1 1/4" diam. housing with 5 ft. shielded cable.

PA-48—Shipping wt., 2 lbs.....Net 6.95

## NEW HI-IMPEDANCE CRYSTAL MIKE


- EXCEPTIONAL PERFORMANCE AT AMAZINGLY LOW PRICE
- IDEAL REPLACEMENT MIKE FOR TAPE RECORDERS



An attractive high quality microphone that is outstanding for tape recorder as well as countless applications requiring a reliable hi-impedance crystal microphone. Has a frequency response of 30-10,000 cps and an output level of —51db. Can be used as very neat desk microphone or can be conveniently held in hand. Housed in neat plastic case and is supplied with 8 feet flexible, single shielded conductor cable. 3" x 2 1/4". Shpg. wt., 1 lb.

PA-73.....Net 2.95

## HARMONICA CONTACT MICROPHONE



This is a fine quality, sensitive, crystal contact microphone with a high output that is especially designed to fit harmonicas. When the relatively weak sound of a harmonica is amplified, the results are astonishing. The audio section of a phonograph, or radio. Installation is simple. The microphone bracket slips under the screw on the bass end of the harmonica and the other end connects to the amplifier system. It is sturdy but leads measure only 1 1/2" L x 3/4" W x 3/8" D. Shpg. wt. 1/2 lb. Complete with 7 ft. shielded cable.

PA-35.....Net 1.49

## Lafayette SPECIAL VALUES!



MIKE STAND  
Ergonomical desk stand. Chrome plated; heavy cast base finished in gray wrinkle. 4 3/4" diam., 7" h. Feet pad 1/2" —27 thread; adjustable collar. Shpg. wt., 2 lbs.

PA-34.....Net 1.29



POPULAR MIKE CONNECTORS  
Standard single contact, card mounted, nickel plated brass, knurl grips, 3/4"-27 thread.

MS-467 Female connector 22¢  
MS-468 Male connector 16¢


## NEW! Electro-Voice 729 CERAMIC CARDIOID

The Model 729 is the lowest priced cardioid ever built. Random noise, reverberation and feedback possibility reduced by a factor of 67%. Front pickup range near twice that of pressure microphones. Designed for public address, paging, amateur radio, home stereo recording, and general communications. Output —55db. Response 60 to 8,000 cps. High impedance only. May be used in any climate. Available with or without "on-off" switch. Metalure gray front with medium gray back. Supplied with attractive desk stand and floor stand. Shpg. wt., less cable and stand, 13 oz.

MA-47 Net 14.41  
MA-48 Net 15.58

## NEW STUDIO DYNAMIC MICROPHONE

IDEAL FOR HOME, OFFICE OR STUDIO USE

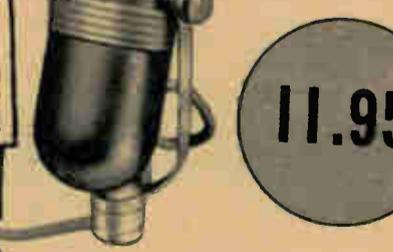

- FREQUENCY RESPONSE—50-11,000 cps.
- HIGH IMPEDANCE—50,000 OHMS.
- HIGH OUTPUT

A revelation in microphone value, this high quality omni-directional dynamic microphone provides features found in microphones selling for many times the price. Employing a unique swirl ridged aluminum diaphragm completely sealed and gasketed against high humidity and temperature conditions, the PA proves itself ideal for a wide variety of applications, such as tape recording, church, choral groups and theatrical use. The 360° stirrup shaped bracket provides for mounting with any 3/4"-27 thread floor, desk stand or boom mount. Finished in an attractive gunmetal grey the microphone is supplied with 4 1/2' shielded cable. Shpg. wt., 1 lb.

PA-49 STUDIO DYNAMIC MICROPHONE.....Net 11.95

11.95

REG. VALUE 49.50  
ONLY 11.95

## NEW! DUAL IMPEDANCE SLIM DYNAMIC MICROPHONE

- RUGGEDLY CONSTRUCTED
- ON-OFF SWITCH
- 600 & 50,000 OHM IMPEDANCES SELECTED BY SIMPLE ROTATION OF PLUG

Beautiful, professional-looking dynamic with solidly-cast, tapered, slim case with satin-chrome finish. Heavy duty slide-type on-off switch. Built-in transformer supplies dual unbalanced impedances—low Z is 600 ohms, high Z is 50,000 Ohms. Swivel mount fits all standard 3/4"-27 threaded stands. Blast filter eliminates unpleasant "pops" with voice use. Omnidirectional when used vertically—cardioid pattern when tilted. Engineering design and finish are of the highest quality, making this microphone excellent for any application. Complete with 5 ft. plug-in cable. Shpg. wt., 2 1/2 lbs.

PA-46 Net 11.95

## ARGONNE ALL-PURPOSE DYNAMIC MICROPHONE

- DUAL IMPEDANCE—250 & 50,000 OHMS
- USABLE RESPONSE 50-18,000 CPS
- FOR HAND-HELD, DESK OR FLOOR STAND USE
- IDEAL FOR TAPE RECORDING, PAGING, COMMUNICATIONS

Here is a flexible dynamic microphone with characteristics suitable for almost any application. Ruggedly constructed, with tapered, cast-metal body and removable base for desk use. Mounts to the base by means of a 360°-swivel adjustable ball joint and fitted with an adapter for standard 3/4"-27 floor stand. SPECIFICATIONS: FREQUENCY RESPONSE—Practically flat 80-10,000 cps; ± 5 db 70-13,000 cps. OUTPUT—70 db below 1 volt/micrabar at 1,000 cps. DUAL IMPEDANCE: Low (250 ohms), High (50,000 ohms) unbalanced. Size 9" high (with base), 2" diam. at head, tapering down to 3/4". Base diam. 4-13/16", 1 1/4" high. Shpg. wt., 6 lbs.

AR-3—Dynamic microphone, complete with base, floor stand adapter, and 1' cable.....Net 15.95

15.95

# UNEQUALED QUALITY AND SAVINGS IN LAFAYETTE HI-FI KITS

## KT-310 36 WATT (18 WATTS PER CHANNEL) STEREO BASIC POWER AMPLIFIER KIT

- 36-WATT STEREO AMPLIFIER - 18-WATTS EACH CHANNEL
- EMPLOYS 4 NEW PREMIUM-TYPE 7189 OUTPUT TUBES
- 2 PRINTED CIRCUIT BOARDS FOR NEAT, SIMPLIFIED WIRING
- RESPONSE BETTER THAN 35-30,000 CPS  $\pm$  1/2 DB AT 18 WATTS
- LESS THAN 1% HARMONIC OR INTERMODULATION DISTORTION



2.00 down

**47.50**

Save lots of money without sacrificing high-fidelity performance by assembling this carefully engineered basic amplifier kit. Designed for both stereo and monaural applications—circuit provides 18 watts on each stereo channel or can deliver a hefty 36 watts when operated monaurally. TRUE HIGH-FIDELITY RESPONSE with coverage from 35 to 30,000 cps  $\pm$  1/2 db at 18 watts. Four premium-type 7189 output tubes are your assurance of true, undistorted reproduction of all program material. Less than 1% IM or harmonic distortion. CONTROLS include two input volume controls, a channel-reverse switch (AB BA), and a monaural/channel mode switch. DUAL OUTPUT IMPEDANCES of 4, 8, 16 and 32 ohms, the latter tap permitting

the parallel (monaural) operation of two speaker systems of up to 16 ohms impedance. INPUT SENSITIVITY is 0.45 volt per channel for full output. PRINTED CIRCUIT BOARDS make it easy for even the beginner to assemble his own amplifier. The illustrated instruction manual which comes with the kit outlines each step clearly and completely. The kit includes all parts, the perforated metal cage shown in the photograph, tubes, and instruction manual. Over-all measurements are: 9-3/16" deep (10-9/16" with control knobs), 5 1/4" high, and 13 1/4" wide. Shipping weight is 22 lbs. KT-310WX ..... 2.00 Down ..... Net 47.50 LA-310WX Same as above, but completely wired and tested. .... 5.00 Down ..... Net 72.50

## 70-WATT DELUXE BASIC AMPLIFIER KIT

- Frequency Response 10-100,000 cps  $\pm$  1db at 1 watt
- Power Response 20-20,000 cps  $\pm$  1db at 70 watts with less than 2%
- Inverse Feedback
- Variable Damping
- Metered Balance and Bias Adjust Controls
- Famed Chicago Wide-Range Linear Output & Power Transformers.



KT-400

5.00 down


**69.50**

Here's ultra-stability in a 70 watt basic power amplifier employing highest quality components conservatively rated to insure performance and long life. Features matched pair KT 88's and wire range linear Chicago output transformer, variable damping control, meter for bias and balance and gold finish chassis. Frequency response 10-100,000 cps  $\pm$  1 db. Hum and noise 90 db below full output. IM distortion less than 1 1/2% at 70 watts, less than 0.3% below 30 watts. Harmonic distortion less than 2% at 70 watts from

20 to 20,000 cps  $\pm$  1 db. Output impedance 4, 8 and 16 ohms. Handsome decorative cage perforated for proper ventilation. Size 14 1/2" x 10 x 7 1/4" including cage and knobs. Shpg. wt., 40 lbs. KT400WX - Lafayette 70 watt Deluxe Basic Amplifier Kit complete with cage and detailed assembly instructions. 5.00 Down ..... Net 69.50 LA-70WX - Same as above completely wired and tested with cage and instruction manual 5.00 Down Net 94.50

## KT-300 MASTER AUDIO CONTROL CENTER KIT

- HIGHLY FLEXIBLE — CANNOT BECOME OBSOLETE ● SELF-POWERED
- DC ON ALL FILAMENTS ● 24 POSITIONS OF EQUALIZATION
- TAPE HEAD INPUT, HIGH IMPEDANCE
- DUAL CATHODE FOLLOWER OUTPUT STAGES
- PERFECT FOR CONVERTING TO STEREO

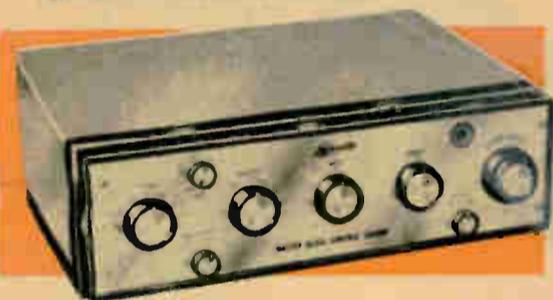

2.00 down

**29.50**

The KT-300 is not only an outstanding monaural preamp, but it has been functionally designed to keep pace with the conversion of your present Hi-Fi system to stereo. A special dual volume control provides for the output adjustment of a second preamplifier. Features include DC on all tube filaments, negative feedback in every stage, dual cathode follower output stages and latest printed circuit construction. Less than 0.09% IM distortion and less than 0.07 harmonic distortion at 1 volt. Hum and noise level better than 80 db below 3 volts. Uniformly flat

frequency response over entire audible spectrum. 7 inputs for every type of phono, tuner or tape. Size 12 3/4" x 9 1/2" x 3 3/4". Shpg. wt. 10 1/2 lbs. Lafayette Master Audio Control Kit. Complete with cage and detailed assembly instructions.

KT-300 ..... 2.00 Down ..... Net 29.50

Same as above, but completely wired and tested with cage and instruction manual. LT-30 ..... 2.00 Down ..... Net 49.50

## KT-315 STEREO CONTROL CENTER KIT

- TWO LOW NOISE 7025 DUAL-TRIODES
- POSITIVE CONTROL 50 FEET OR MORE
- BRIDGE BALANCING CIRCUIT
- OUTPUT FOR "THIRD CHANNEL"
- CLUTCH-TYPE VOLUME CONTROL



2.00 down

**27.50**

This self-powered electronic adapter offers exciting features unique even in the fast moving stereo field. Inclusion of low-impedance "plate follower" outputs permits remote operation 50 feet or more from the controlled amplifier. Unusual bridge circuit assures precise balancing of the stereo system by means of audible "null." Objectionable "hole-in-the-middle" effect can be eliminated by cross-feeding variable amounts of audio from each channel. Includes controlled third-channel output for driving third amplifier and speaker, if desired. Individual or simultaneous control of each channel. Phase reversal with or

without channel reversal. Selective monaural operation. Frequency response 10 to 25,000 cps  $\pm$  0.5 db; gain 6 db; cross channel rejection better than 50 db.

Premium type 7025 dual triodes. Printed circuit boards for easy error-free assembly. Complete, profusely illustrated manual included. Adapter with cage measures 6 1/2" wide x 4 1/2" high x 7" deep (not including knobs and projections). Shipping weight 7 1/2 lbs.

KT-315 Electronic Stereo Adapter Kit (with cage) ..... Net 27.50

# DO-IT-YOURSELF PROFESSIONAL STEREO HI-FI SYSTEMS

Build it yourself... enjoy the finest in stereophonic sound by assembling these Lafayette components in kit form. Lafayette's crystal clear instruction manuals and pictorial diagrams insure easy assembly even if you have no previous technical experience. Best of all — Lafayette kit systems offer you the best in stereo equipment at tremendous savings.



KT-600WX



KT-310WX




Glaser-Steers GS-77



SK-113WX



NEW GE VR-22



OPTIONAL SPEAKER ENCLOSURES

HIGHBOY

### COMPONENTS

LAFAYETTE KT-600WX STEREO PREAMP KIT	79.50
LAFAYETTE KT-310WX 36 WATT STEREO POWER AMP. KIT	47.50
GLASER-STEERS GS-77 DELUXE CHANGER	59.50
NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE	24.45
2-LAFAYETTE-GOODMANS SK-113WX 3-WAY 15" SPEAKERS @ 79.50	159.00
Regular Catalog Price <del>349.95</del>	

You Save 55.05

LAFAYETTE SYSTEM PRICE **314.90**

Only 10.00 Down

Complete stereo system as described above. Shpg. wt., 112 lbs. MF-660WX ..... 10.00 Down ..... Net 314.90

Same as MF-660WX but with the addition of 2 — Lafayette Highboy speaker enclosures. Choice of CAB-19 in Mahogany or Blonde and CAB-21 in Walnut (Please Specify). Shpg. wt., 188 lbs. Dimensions 20"W x 23"H x 16"D. MF-661WX ..... 10.00 Down ..... Net 404.90

Model GSB Woodbase for GS-77 in ebony with satin brass trim. Shpg. wt., 5 lbs. PK-350W ..... Net 9.60

● SELECT YOUR OWN CARTRIDGE ● You may substitute the Shure M7D, Pickering 371C, or the new Electro-Voice 31MD7 in any system shown with the GE VR-22 at no additional cost. The Shure M3D may be substituted at an additional cost of \$24.00.

### COMPONENTS

LAFAYETTE KT-600WX STEREO PREAMP KIT	79.50
2-LAFAYETTE KT-400WX 70-WATT AMPLIFIER KITS @ 69.50	139.00
LAFAYETTE PK-245WX PROFESSIONAL TURNTABLE (Less Base)	64.50
LAFAYETTE PK-270W 12" TONE ARM	17.50
NEW GE VR-22 (.5 MIL) STEREO	27.39
2-LAFAYETTE-GOODMANS SK-115WX 3-WAY 15" SPEAKERS @ 82.00	164.00
Regular Catalog Price <del>491.89</del>	

You Save **52.39**

LAFAYETTE SYSTEM PRICE **439.50**

Only 10.00 Down

Complete stereo system as listed above. Shpg. wt., 195 lbs. MF-716WX ..... 10.00 Down ..... Net 439.50

Wood base for Lafayette PK-245WX. Specify finish. PK-265W ..... Net 14.95

Same as MF-716WX, but with Lafayette PK-280W 16" Tone Arm instead of PK-270 Tone Arm. Shpg. wt., 196 lbs. MF-717WX ..... 10.00 Down ..... Net 441.50

Same as MF-716WX, but with the addition of 2 Lafayette Highboy speaker enclosures. Choice of CAB-19 in Mahogany or Blonde and CAB-21 in Walnut (Please Specify). Shpg. wt., 271 lbs. Dimensions 20"W x 23"H x 16"D. MF-715WX ..... 10.00 Down ..... Net 529.50

**NEW!**

# The OUTSTANDING "Stereo 250" KIT

## LAFAYETTE'S 50 WATT STEREO AMPLIFIER

### For Those Who Want, and Expect, the Finest!




- ✓ DELUXE FEATURES YOU'LL FIND IN UNITS COSTING 189.50
- ✓ UNSURPASSED PERFORMANCE FOR SUPERLATIVE STEREO
- ✓ ADVANCED AUDIO CIRCUITRY
- ✓ TREMENDOUS RESERVE POWER



Model KT-250A

IN  
EASY-TO-BUILD  
KIT FORM  
**74.50**  
ONLY 5.00 DOWN

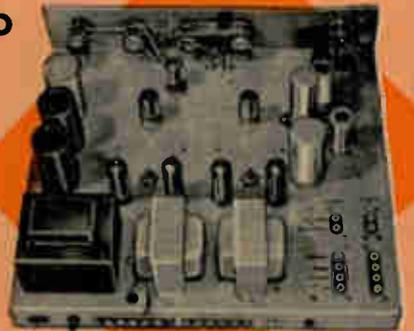

### 50 WATT INTEGRATED STEREO AMPLIFIER

- Two 25 Watt Channels, 50 Watt Monophonic Output
- Response 15 to 40,000 cycles
- Third Channel Output
- New 6CW5/EL86 Output tubes
- Full Range of Controls and Inputs
- New Distinctive Styling
- Individual Bias and Balance Adjustments

#### SPECIFICATIONS

**CONTROLS:** Total of 12 individual controls (3 dual concentric and 6 single); **SELECTOR SWITCH:** 4 position—Phono-Aux-Tuner-Tape Head. **SEPARATION CONTROL:** Continuously variable with power on-off switch. **BASS CONTROL:** Dual concentric, 14 db boost or cut at 50 cps. **TREBLE CONTROL:** Dual concentric, 14 db boost or cut at 10 Kc. **VOLUME-BALANCE CONTROL:** Dual concentric, clutch-operated for independent or simultaneous level control of both channels. **MODE SWITCHES:** 2 slide switches, provide Normal Stereo-Reverse Channel—Mon A—Mon B. **LOUDNESS SWITCH:** On-Off. Provides loudness contour compensation for volume control. **PHASE SWITCH:** Provides electronic phase reversal.

**POWER OUTPUT & DISTORTION:** 50 watts (100 watts peak)—25 watts per channel ± 1 db at less than 1% Total Harmonic Distortion at 1 KC. Less than 0.25% Total Harmonic Distortion at 1 KC at normal listening level (1 watt); less than 0.5% THD distortion at normal listening level. **FREQUENCY RESPONSE:** 15-40,000 cps ± 0.5 db at normal listening level; 20-50,000 cps ± 1 db at rated output. **HUM & NOISE:** Zero Volume Hum 77 db below rated output; max. volume hum high level inputs 70 db below rated output; Mag. Phono inputs 50 db below rated output. **SENSITIVITY:** For full output high level inputs 0.5V; Mag. phono 3.5 MV at 1 KC. **CHANNEL SEPARATION:** Greater than 55 db at 1 KC; greater than 45 db from 20-20,000 cps. **SPEAKER AUXILIARY OUTPUT:** 1 switched. **TUBE COMPLEMENT:** 4-6CW/EL86, 2-7199, 3-12AX7, 3 silicon diodes. **POWER:** 200 watts; 110-125V AC 50-60 cps. Attractive beige vinyl laminated steel cabinet. Handsomely designed brass anodized aluminum front panel. Sienna brown molded legs, matching knobs with polished brass inserts. Size: 14 1/2" W x 12 3/4" D x 5 1/2" H (with legs and knobs). Shpg. wt., 26 lbs.

**MODEL KT-250AWX—50 Watt Integrated Stereo Amplifier Kit, complete with deluxe cabinet and legs, all necessary parts and detailed assembly manual** ..... 5.00 Down ..... Net 74.50

#### NO TECHNICAL SKILL REQUIRED

Designed for ease of construction, the KT-250A can be assembled in a minimum of time. Assembly manual contains detailed step-by-step instructions ... guides you every step of the way. Large full-scale pictorials show you where every wire and component goes — eliminate any chance of error or confusion. You build an amplifier comparable in every way to a factory-wired unit — and save real money too!

The new Lafayette KT-250A offers remarkable versatility, high quality of reproduction and new distinctive styling in one convenient low-cost unit — another example of Lafayette's constant effort to provide the audio enthusiast and music lover with audio components that represent the finest quality value in their class.

Designed and engineered for ease of assembly, the KT-250A is a fine stereo preamplifier and 50 watt stereo amplifier combined — with all the controls and features to enable you to enjoy the utmost in listening pleasure in any situation. Whether you use it as a stereo amplifier delivering 25 watts per channel or as a powerful 50 watt monophonic amplifier, you are assured of true high fidelity reproduction — free from hum, noise and distortion. Check the features below — see why the KT-250A is worthy of a place in your stereo music system.

#### DELUXE FEATURES

**Unique Separation Control**—A new stereo control which provides continuously variable channel separation—from full monophonic to full stereo. Lets you select the amount of separation you want.

**Clutch-Operated Volume Balance Control**—Gives you a choice of independent or simultaneous control of both channels—you can use it as a master volume control without disturbing previously selected settings on each channel.

**4 Independent Tone Controls**—Independent Bass and Treble adjustment for each channel. Concentric mounting for convenience—inner knob controls one channel, outer the other channel.

**Mode Switching**—Two slide switches provide Normal Stereo—Reverse Channel—Mon A (Channel A reproduced through both channels)—Mon B (Channel B reproduced through both channels).

**Input Selector**—4-position switch lets you select instantly any one of your connected monophonic or stereo sources—special non-shortening arrangement on one position permits recording and playback using a permanently connected tape recorder.

**Loudness Switch**—Provides the frequency response changes required by the ear at low listening levels and permits the Volume-Balance control to function as a compensated loudness control.

**Phase Switch**—Reverses the phase of one channel electrically—corrects for speakers connected out of phase or for reversed phase recordings sometimes found commercially.

**3 Pairs of High Level Inputs**—For connection of Crystal or Ceramic phono, Tuner, and auxiliary equipment.

**2 Pairs of Low Level Inputs**—For connection of magnetic phono and Tape Head.

**Main Speaker Outputs**—Dual 4, 8 and 16 ohm terminals may be paralleled for 4 or 8 ohm operation at 50 watts.

**Tape Output**—Provides an output for Tape recording—unaffected by Volume and Tone Controls.

**Bridged Output**—A monophonic blend of both channels which can be fed to a third single channel power amplifier and speaker for a greater sound spread in stereo. May also be used for listening in another room.

#### ADVANCED AUDIO CIRCUITRY INCLUDES:

- DC applied to all preamplifier and tone control tube heaters for hum-free operation
- RIAA equalization on phono inputs
- NARTB tape equalization on tape head inputs
- Individual bias and balance controls
- Hum balance Control
- Excellent DC power supply regulation provided by silicon diodes
- Total of 9 tubes, plus 3 silicon diodes—uses premium 6CW5/EL86 output tubes.

## TOP QUALITY STEREO-PHONO SYSTEM With the Outstanding "Stereo 250" Kit

### LAFAYETTE SYSTEM PRICE 219<sup>75</sup>



Lafayette KT-250A




Glaser-Steers G5-77



New GE VR-22 (.7 Mil) Stereo Cartridge With Diamond Stylus

FINISHED ON 4 SIDES



2-Lafayette Eliptaflex Series Bookshelf Enclosures



2-Lafayette-Goodmans SK-110WX

#### COMPONENTS

- Lafayette KT-250A 50 Watt Integrated Stereo Amplifier Kit
- Glaser-Steers G5-77 4 Speed Stereo Record Changer (Less Base)
- New GE VR-22 (.7 MIL) Stereo Cartridge with Diamond Stylus
- 2-Lafayette-Goodmans SK-110WX 12" 3-Way Speakers with 1 1/4 lb. Magnets.

Enjoy the latest stereo records with superb high fidelity system. Truly breathtaking sound reproduced realistically in your home. And you enjoy tremendous savings by buying these components as a system and assembling the amplifier. You can also add, at any later date, a stereo tape deck and/or stereo FM/AM tuner to complete your music center. The new Lafayette KT-250A 50 watt integrated stereo amplifier kit offers 25 watts per stereo channel, or 50 watts if used monophonically. Advanced features such as separate bass and treble controls for each channel and concentric clutch-operated control for individual or simultaneous level adjustment are incorporated. Full flexibility and smart styling keynote this new integrated stereo amplifier. The Glaser-Steers G5-77 stereo changer is featured because of its proven quality. The new GE VR-22 stereo cartridge with diamond stylus provides low tracking force and wide frequency range. The speakers for this outstanding system are the widely acclaimed Lafayette-Goodmans SK-110WX 12" 3-way speakers with 1 1/4 lb. magnets. System supplied with all interconnecting cables and simplified instructions for easy assembly.

Complete Stereo system as described above. Shpg. wt. 79 lbs.	
HF-662WX	10.00 Down Net 219.75
PK-350W Model G58 Woodbase for G5-77. Shpg. wt., 5 lbs.	Net 9.60
Same as HF-662WX plus 2-Lafayette Eliptaflex Series Bookshelf Enclosures finished on 4 sides. (Specify finish). Shpg. wt., 150 lbs.	
HF-663WX	10.00 Down Net 282.75
Same as HF-662WX but with 2-Lafayette-Goodmans SK-115WX 15" speakers with 6 1/4 lb. magnets instead of Lafayette-Goodmans SK-110WX speakers. Shpg. wt., 119 lbs.	
HF-664WX	10.00 Down Net 294.75
Same as HF-664WX plus 2-Lafayette CAB-19WX Series Universal Bass Reflex Enclosures. (Specify finish). Shpg. wt., 227 lbs.	
HF-665WX	10.00 Down Net 384.75





# LAFAYETTE STEREO KITS

and ACCLAIMED by ENGINEERS, MAGAZINES,

## Lafayette . . . . STEREO TUNER KIT



# KT-500

THE LAFAYETTE STEREO-TUNER IS UNIQUE AND INCOMPARABLE


- Use it as a Stereophonic FM-AM Tuner
- Use it as separate Monaural FM & AM Tuners
- Use it as straight Monaural FM or AM Tuner

THIS STEREO-TUNER IS YEARS AHEAD

KT-500  
**74.50**  
IN KIT FORM

LT-50  
**124.50**  
COMPLETELY WIRED AND TESTED

ONLY \$5.00 DOWN  
• THE MOST FLEXIBLE TUNER EVER DESIGNED!

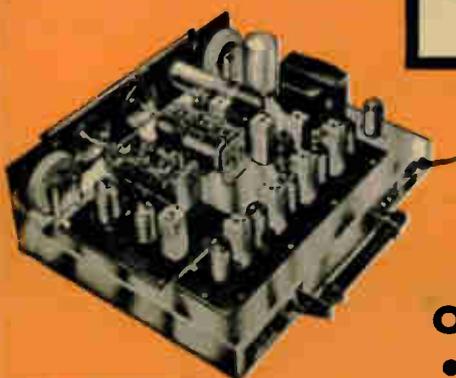

More than a year of research, planning and engineering went into the making of the Lafayette Stereophonic Tuner. Designed against obsolescence, it incorporates every practical and worthwhile feature that is considered necessary for your complete satisfaction of all present and future types of broadcasting. Already, breathtaking stereophonic programs are being transmitted via FM and AM. It will certainly become more and more the popular method of high fidelity broadcasting. The tuner also provides an output for multiple FM stereophonic reception, enabling you to enjoy the ultimate in high-fidelity sound reproduction. Since the FM and AM sections are completely independent of each other, this tuner can be used furthermore as a dual-monaural tuner. In this way, the music lovers are able to listen to concert programs on the FM channel in one room, while the younger-set can listen to a different program on AM in another room. In addition, on a monaural program which is broadcasted simultaneously via FM and AM, this tuner will enable you to listen in both channels and reproduce them through individual amplifier-speaker systems. The improvement of quality will be immediately noticeable because the sound source is now distributed and at the same time, the hole-in-the-wall point source effect is completely eliminated. Of course, the unit can also be used as an ordinary type of FM-AM tuner, providing you with unsurpassed quality of reception.

Apart from its unique flexibility, this is, before all else, a superior high-fidelity tuner, employing many features found only in the highest priced units. An inspection of the tubes and parts used will reveal that this tuner is engineered without compromise of any kind. With the Lafayette Stereo-Tuner you are assured of noise-free, drift-free, distortion-free performance. You will not only hear this quality, but also sense it even in the mechanical details; in the "feel" on the velvet-smooth easy flywheel tuning, in the professional appearance of the tastefully selected colors that will blend with any decor. The just-right shade of gold-brass with the dark moroan background, and is set off by matching moroan knobs with gold inserts. The design of the cabinet has the simplicity of modern styling, touched by a stroke of traditional elegance. Carefully designed for easy installation in console if desired. Deluxe features include separate FM and AM sections, each tuned with its own 3-gang tuning capacitor, and with its own individual low impedance cathode follower output. This means that long output cables can be used to connect tuner to amplifier or control center without fear of high frequency loss. Also, separate volume controls are provided for each channel so that, when used for stereophonic reception, a proper balance between channels can be achieved. Without this important feature, the wonderful realism of stereophonic sound would be destroyed. Convenient front panel switch changes from stereo to monaural use. Simplified accurate knob-tuning is provided by magic eye which operates independently on FM and AM. Automatic frequency control "locks in" FM stations permanently. Ferris rod antenna with loading ring is supplied to bring in weak AM stations for quality reproduction. Designed for easy assembly, the kit is built around two printed circuit boards and prealigned IF's, making construction and wiring simple, even for first time users.



### THE MOST FLEXIBLE TUNER EVER DESIGNED!

- MULTIPLEX OUTPUT FOR NEW STEREO FM
- TWO PRINTED CIRCUIT BOARDS AND IF'S PREALIGNED
- FM AFC AND AFC DEFEAT
- 17 TUBE PERFORMANCE - 11 Tubes (4 dual-purpose) + Tuning Eye & Selenium Rectifier
- ARMSTRONG CIRCUIT WITH DUAL LIMITERS AND FOSTER-SEELEY DISCRIMINATOR
- 12 TUNED CIRCUITS AND DUAL CATHODE FOLLOWER OUTPUTS
- EXTREME SENSITIVITY AND WIDE FREQUENCY RESPONSE

**SPECIFICATIONS:** RANGE: FM 88-108MC, AM 530-1650KC. FM CIRCUIT: Armstrong, low noise front end with triode grounded grid amplifier and triode mixer. Double tuned dual limiters, Foster-Seeley discriminator, AFC and AFC defeat. AM CIRCUIT: Superhet with 3 stages AVC, 10kc whistle filter, ferrite antenna. **DISTORTION:** Under 1% harmonic on FM; under 1% on AM for up to 80% modulation. **HUM LEVEL:** 60 db below 100% modulation. **SENSITIVITY:** FM—full limiting on signals as low as 1  $\mu$ v, 2  $\mu$ v for 30 db quieting; AM Terminal Sensitivity 5  $\mu$ v. **SELECTIVITY:** FM 200kc bandwidth; 6 db down, AM 8kc BW; 6 db down. **FREQUENCY RESPONSE:** FM 20-20,000 cps  $\pm$  1/2 db, AM 20-5,000  $\pm$  3 db. **FM DRIFT:**  $\pm$  5kc Maximum. **IMAGE REJECTION:** FM 40 db; AM 30 db. **I.F. REJECTION:** FM 70 db, AM 50 db. **RADIATION:** MEETS FCC REQUIREMENTS. **OUTPUT LEVEL:** FM 2 1/2 V for 100% modulation, 1V for 30%; AM average 1V. **CONTROLS:** 5 controls; FM VOL, AM VOL, FM Tuning, AM Tuning, and five position function selector switch. **TUBES:** 3-6BA6, 2-6AU6, 1 each 6BK7B, ECC85, 6AL5, 6BE6, 12AU7 and 6U5 tuning eye. Selenium rectifier. **OUTPUT IMPEDANCE:** Low impedances cathode follower. Output jacks for FM, AM or Stereo. **ANTENNA INPUT:** 300 ohms. Size, 13 3/4" W x 10 1/2" D x 4 1/2" H. Shpg. wt., 18 lbs. Kit comes complete with all parts and metal cover, a step-by-step instruction manual, schematic and pictorial diagrams.

MODEL KT-500WX Stereo Tuner Kit ..... 5.00 Down ..... Net 74.50  
 LT-50WX Same as above, completely factory wired and tested 5.00 Down Net 124.50

Use It as a Stereophonic FM-AM Tuner

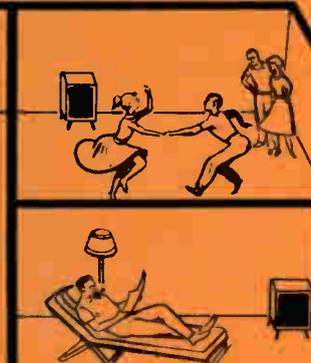

Use It as simultaneous Monaural FM & AM Tuners

Use It as separate Monaural FM or AM Tuner

## hi-fi music AT HOME

"The assurance of success lies in the excellent design of this tuner, the thoughtful manner in which it was planned for assembly from a kit of parts, the use of RF and IF printed-circuit boards in the FM sections, and the very complete illustrations and instructions. You will have reason to be proud and pleased with the results."  
 July-Aug. 1958

## A few COMMENTS from the PROFESSIONALS

### Radio-Electronics

"The KT-500 tuner has a number of interesting construction and design features not usually found in moderately priced tuner construction kits."  
 Oct., 1958

### audiocraft

"... low distortion on the FM channel and excellent sensitivity of the tuner as a whole combines with simplicity of construction to make the KT-500 a pleasure to build and use."  
 July, 1958

## LETTERS! Here are a FEW of the THOUSAND

"Instructions superb. As an electronics advisor on the staff of one of the Bell system companies, I find this an excellent unit, comparable to units at three times the price."  
 B. Spring  
 Portland, Oregon

"I am enjoying my KT-500 more and more each day. It works beautifully and meets, if not exceeds, all your specifications. A friend of mine, after seeing and hearing my KT-500, has decided to order one for his Hi-Fi unit."  
 Charles Bell  
 St. Louis, Mo.

"I thoroughly enjoyed building this kit. It proved to be worthy of all my expectations. I am very pleased with its performance. Keep up the good work!"  
 John Kinney  
 Santa Monica, Calif.

"Instructions good ... the kit's tops."  
 Dominic Grande  
 Cambridge, Mass.

"Instructions were very good. Performance is wonderful. Best all around design ..."  
 S. B. Heberlig  
 Glendora, New Jersey

"This kit was a well engineered model and your instructions made it easy to construct."  
 Edwin Lambert, Jr.  
 Quincy, Mass.

"Instructions and diagrams were very good. AM is tremendous, very good tuner."  
 F. Hathaway  
 Pompey, New York

"... this kit is excellent all the way around. It would be difficult to improve upon."  
 Robert Meier  
 Washington, D.C.

# TRIED, TESTED, APPROVED STEREOPHILES, and KIT-BUILDERS




## Lafayette PROFESSIONAL STEREO PRE-AMPLIFIER MASTER CONTROL CENTER

# KT-600

THE LAFAYETTE KT-600 SOLVES EVERY STEREO/MONAUROUS CONTROL PROBLEM

With All The Versatility Of A  
Broadcast Studio Control Console

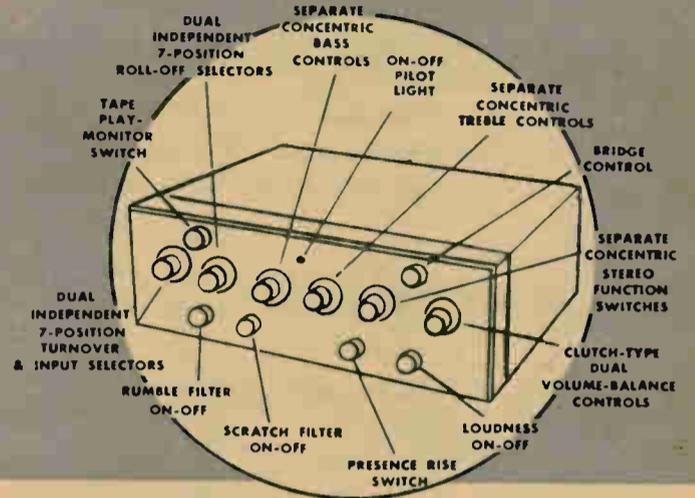

Patents applied for a Bridge and Null Balance circuitry.

**MODEL  
KT-600**  
IN EASY-TO-BUILD  
KIT FORM  
**79.50**  
\$5.00 DOWN

**LA-600**  
COMPLETELY WIRED  
AND TESTED  
**134.50**  
\$5.00 DOWN

- A GIANT FORWARD STEP IN PREAMPLIFIER DESIGN!
- UNIQUE STEREO & MONAUROUS CONTROL CENTER FACILITIES & OUTSTANDING PERFORMANCE SUPERIORITY!
- WITH AMAZING NEW BRIDGE CIRCUITRY & CONTROL FOR VARIABLE 3d-CHANNEL OUTPUT FOR 3-SPEAKER STEREO SYSTEMS!
- VARIABLE CROSS-CHANNEL SIGNAL FEED FOR ELIMINATION OF "HOLE-IN-THE-MIDDLE" EFFECTS WITH STANDARD 2-SPEAKER STEREO!
- HIGHLY PRECISE "NULL" BALANCING & CALIBRATING SYSTEM PROVIDES MORE ACCURATE STEREO BALANCE THAN METERS!

### PERFORMANCE SPECIFICATIONS FOR SUPER-STEREO

- RESPONSE 5-40,000 CPS  $\pm$  1 DB
- TAPE HEAD PLAYBACK EQUALIZATION FOR NEW 4-TRACK STEREO
- LOW LEVEL SENSITIVITY 2.2 MILLIVOLTS FOR 1 VOLT OUT
- HIGH LEVEL SENSITIVITY 94 MILLIVOLTS FOR 1 VOLT
- SWITCHED 12 DB/OCTAVE RUMBLE & SCRATCH FILTERS
- LESS THAN .03% IM DISTORTION
- DUAL TAPE MONITOR JACKS & SWITCH FOR RECORD & PLAYBACK
- DUAL INPUTS FOR STEREO/MONAUROUS CERAMIC, CRYSTAL OR CAPACITIVE PICKUPS WITH FULL USE OF EQUALIZATION SELECTORS
- SIGNAL-TO-NOISE BETTER THAN -80 DB AT HIGH LEVEL & -62 DB AT LOW LEVEL INPUTS FOR 2 VOLTS OUT
- "PRESENCE" SWITCH SOLO PROJECTION
- BASIC CONTROLS ALL CONCENTRIC
- "PLATE FOLLOWER" OUTPUTS FOR LOW IMPEDANCE WITH LOWEST DISTORTION
- 7-TYPE 7025 LOW-NOISE DUAL TRIODES
- 4-AUXILIARY AC OUTLETS

The KT-600 represents one of the most brilliant audio achievements since the advent of stereo. This "no compromise" stereo preamplifier and control unit offers unlimited versatility... includes every feature necessary for the very finest reproduction — truly a masterpiece of audio design. Already in use professionally, the LA-600 has been overwhelmingly acclaimed by those who own it as the finest stereo preamplifier available — at any price! It has a total of 12 input jacks (6 stereo pairs) for program sources of any type and any level — all of which may be selected by a front panel control. Separate Turnover and Roll-Off switches provide 24 positions of correct equalization — independently adjustable on each channel. A dual concentric Stereo Function selector provides extreme flexibility in the control of your selected program sources — there is practically no mode of operation which cannot be provided by these two switches. A unique Bridge Control provides continuously variable channel separation from full monaural to full stereo, or it can optionally be used to regulate the 3rd channel output. A clutch-operated Volume Balance control pro-

vides independent or simultaneous level adjustment of channels. Additionally, this control may be used to balance channels by means of an audible "null" — far more accurate than meters! Low impedance cathode follower outputs are provided for connection to two basic amplifiers (or stereo amplifier) and in addition to the 3rd channel output, there are two tape output jacks for recording purposes. Other features include: 4 dual concentric input level controls, Presence Rise switch; Individual Bass and Treble controls for each channel, Rumble Filter, Scratch Filter; Loudness switch; Tape Play-Monitor switch

Tape Head inputs 1.8 mv for 1 volt out. HUM AND NOISE: High level inputs better than 80 db below 2.0 volts, low level inputs better than 62 db below 2.0 volts. INPUT IMPEDANCES: High level—250K ohms; Mag—96K ohms, Ceramic—96K ohms in series with .88µmf, Tape Head—470K ohms. OUTPUT IMPEDANCES: Main Outputs—1500 ohms; Tape Outputs—2700 ohms, Bridged Output—1100 ohms. TONE CONTROL RANGE: Bass—15 db at 30 cps, Treble—15 db at 10 Kc. RUMBLE FILTER: 12 db octave slope, down 15 db at 30 cps. SCRATCH FILTER: 12 db octave slope, down 15 db at 15 Kc. CROSSTALK: Greater than 55 db separation between channels. AUXILIARY AC OUTLETS: 4, 1 unswitched. TUBES: 7-7025, 2-Selenium Rectifiers. POWER REQUIREMENTS: 35 Watts, 105-125 volts AC, 50/60 cycles. SIZE: 14" W x 4-13 1/2" H x 11 1/2" D, net including projections. Shpg. wt., 16 lbs.

### SPECIFICATIONS

FREQUENCY RESPONSE: 5-40,000 cps  $\pm$  db. DISTORTION: Less than 0.05% IM of 2 volts out; Less than 0.1% Harmonic, at 2 volts out. SENSITIVITY: Low level 2.2 mv for 1 volt out; high level 94 mv for 1 volt out.

Stereo Preamplifier Kit	5.00 Down	Net 79.50
KT-600 WX		
Stereo Preamplifier, wired and tested	5.00 Down	Net 134.50
LA-600 WX		

## AL CRITICS and the TECHNICAL PRESS



"... is a skillfully engineered unit incorporating almost every mono and stereo function due that has yet appeared." May, 1959



"... so complete and detailed, there's little chance of making a mistake in putting the unit together." Nov., 1959



"It incorporates just about all the features one could hope to find on a single chassis." May, 1959



"The Lafayette KT-600 is unquestionably one of the most flexible stereo control units available today. Its flexibility is complemented by overall performance comparable to manufactured units selling for far more than its modest price. For all practical purposes may be considered a distortionless device." Oct., 1959

## IDS we get from our SATISFIED CONSUMERS!

"As an Electrical Engineer by profession, my sincere admiration goes to the engineers who performed the background work in developing the layout and assembly instructions for this kit assembly."  
**H. C. Pendergast**  
Boise, Idaho

"Everything excellent!!"  
**Carl Jensen**  
Randolph, Mass.

"... the instructions were terrific! I am convinced that Lafayette has the best..."  
**Peter Leyden**  
Brooklyn, New York

"The KT-600 is simply wonderful."  
**Felipe Reyes**  
New York, New York

"The KT-600 is the most remarkable electronic instrument I have ever seen..."  
**Howard Kindig**  
Akron, Ohio

"I wish to commend the staff who designed this kit. I think it is one of the best planned, best organized kits I have ever seen."  
**Robert Fitz**  
Columbus, Ohio

"... one of the finest stereo preamps available... I congratulate you on the fine achievement..."  
**Bill Mitchell**  
Santa Rosa, Calif.

"It was a real pleasure putting the KT-600 together. Your etched circuit board set-up is the finest I have seen."  
**I. E. Ricketts**  
Glendale, Calif.

# Lafayette POPULAR TRANSISTOR KITS

## New 6 TRANSISTOR SUPERHET RECEIVER

WITH LATEST NPN-PNP TRANSISTORS

- GE 2N188A AUDIO OUTPUT TRANSISTORS
- 100% SUBMINIATURE PARTS — NO COMPROMISES!
- LABORATORY DESIGNED — SENSITIVE, SELECTIVE, STABLE!
- CLASS B PUSH-PULL AMPLIFICATION — PLENTY OF POWER.
- FOR GROUP AND PRIVATE LISTENING
- NEW 28 PAGE INSTRUCTION MANUAL

**Superb Performance! Incomparable Value!**

FOR GROUP AND PRIVATE LISTENING

Transistor-wise Lafayette proudly presents its newly revised 6 Transistor Superhet Receiver Kit KT-119A. This Improved model uses the latest GE NPN-PNP Transistors in an ingeniously engineered, laboratory tested circuit providing superb performance and an amazing superior commercial quality. The circuit features a specially matched set of 3 IF transformers, Oscillator Coil, High-Q Loop, Class B Push-Pull Audio Amplification and optimum Transformer Coupling in audio and output stages. Has efficient 2 1/4" speaker for exemplary reproduction and earphone jack for private listening. Complete with all parts, transistors, pre-punched chassis, but less battery and leather case. New 28 page easy-to-follow step-by-step instruction book. Size 6 x 3 1/2 x 1 1/2. Shpg. wt., 3 lbs.



26.50 LESS CASE AND BATTERY

- KT-119A — Complete Kit—Less Case and Battery.....Net 26.50  
 BA-180 Battery 9 V Burgess 2N6.....Net 1.30  
 MS-339A — Sturdy attractive brown leather case with carrying strap for KT-119A. 6 x 3 1/2 x 1 1/2". Shpg. wt., 1 lb.....Net 2.95  
 MS-591 — Sensitive matching earphone.....Net .79

## 5 TRANSISTOR AUDIO AMPLIFIER KIT KT-104

13.95

- CLASS "B" Push-Pull
- Bass and Treble Controls with Preamplifier for Cartridge and Microphone Input
- Excellent as second amplifier for stereo phono conversion

An advanced 5-transistor audio amplifier with a well-designed pre-amplifier stage. Has more than enough volume for average sized room. 3 Inputs: Crystal, ceramic and most hi-output magnetic phono cartridges; AM, FM and Transistor Radio Tuners; most magnetic microphones, and crystal microphones when used with a matching input transformer. Employs circuitry for minimum distortion. Has Bass and Treble controls for more enjoyable listening. Transformer coupled in driver and class "B" push-pull output stages, for clean output and optimum performance. Complete with all parts, pre-punched chassis, attractive front panel, knobs, and easy-to-follow step-by-step instructions. 5 1/2" x 4" x 1". Shpg. wt., 3 lbs.

- KT-104 for 3.2 ohm speaker, less battery.....Net 13.95  
 KT-105 for 8 ohm speaker, less battery.....Net 13.95  
 BATTERY FOR ABOVE  
 BA-180 BURG. 2N6 or eq. 9 v. Shpg. wt., 5 oz. Net 1.30

## 3 TRANSISTOR SUPER-HET POCKET RADIO KIT KT-116

• CONVERTER, 2 IF STAGES, DIODE AND AUDIO OUTPUT

DESIGNER'S DREAM IN A TRUE POCKET SUPERHET RECEIVER! NO EXTERNAL ANTENNA! NO EXTERNAL GROUND!

A highly sensitive, super-selective true pocket superhet receiver that will surprise you with its performance over the complete broadcast band. Just place it in your shirt pocket, place the earphone to your ear, and you're in for a treat! Best of all! No pesky external antenna and ground leads to worry about! The circuit uses 2 high frequency converter and IF Transistors, 2 specially matched IF transformers for maximum power transfer, an efficient crystal diode for detection and a dependable Audio Transistor in a single-ended audio output stage. The components are housed in an attractive professional-looking plastic case. Comes complete with ON-OFF knob and stylish station dial that adds considerable class to the receiver's appearance. Complete with all parts, transistors, case, dial and easy-to-follow step-by-step instructions. Less Battery 4 1/2" x 2 1/4" x 1-1/16". Shpg. wt., 1 lb.

- KT-116 — Complete Kit Less Battery.....Net 13.95  
 MS-260 — Super power dynamic Earphone.....Net 2.95  
 or, MS-368 — SENSITIVE ECONOMY DYNAMIC EARPHONE.....Net 1.44  
 BA-400 Battery 9 V. RCA VS309A.....Net 1.53



13.95

## 1 AND 2 TRANSISTOR POCKET RADIO KITS

ONE TRANSISTOR POCKET RADIO KIT — KT-97

• WITH NEW SUPER-SELECTIVE FERRI-LOOP • PREPUNCHED CHASSIS FOR EASY ADVANCEMENT TO 2 TRANSISTOR KIT

An ideal, neat and low-cost transistor pocket radio kit for students, hobbyists and experimenters interested in a practical and basic knowledge of transistor circuits. Employs the new tapered variable Ferris-Loop and a specially designed miniaturized 365 uF variable capacitor for super selective tuning. Includes a Crystal Diode detector and a reliable transistor in a grounded emitter amplifier stage for maximum output. Will give good reception up to 50 mile radius with approx. 50 ft. antenna and a good ground. Complete with transistor, crystal diode, plastic case, variable capacitor, tapered Ferris-Loop, resistor, capacitors, a neat prepunched metal chassis that makes advancement to the 2 Transistor Kit easy-as-pie. With simple, detailed How-To-Do-It Instructions. Size: 3 1/2" x 2 1/4" x 1". Shpg. wt., 1 lb.

- KT-97 — Complete Kit (less earphone and less battery).....Net 3.95  
 BA-154 Battery 1 1/2 V. BURGESS #7.....Net .10

TWO TRANSISTOR POCKET RADIO KIT — KT-98

The 1 Transistor Pocket Radio Kit plus an additional resistance coupled transistor stage for increased sensitivity and greater output. Can receive even the weaker stations with an approx. 50 ft. antenna and ground. Includes all the KT-97 parts plus one transistor, 2 resistors, one capacitor and transistor socket. Complete with simple, detailed instructions. Size: 3 1/2" x 2 1/4" x 1-3/16". Shpg. wt., 1 lb.


- KT-98 — Complete 2 Transistor Kit (less earphone and less battery).....Net 4.95  
 MS-111 Crystal Earphone for KT-97 and KT-98.....Net .89  
 BA-154 Battery 1 1/2 V. BURGESS #7.....Net .10



## TRANSISTOR CODE PRACTICE OSCILLATOR KIT

COMPLETE WITH TELEGRAPH KEY & TRANSISTOR

2.99

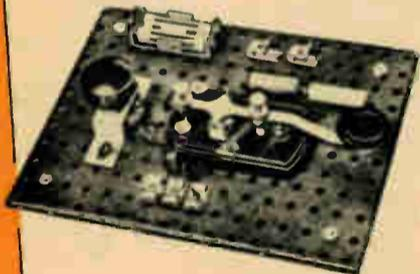

For those interested in mastering the international code, an audio tone oscillator is essential. The circuit of this transistorized feedback oscillator has the simplicity of the neon glow, the signal strength of service, vacuum tube, and requires only two penlite cells for weeks of service. It may be used for solo practice, or two may send and receive with the same unit. Kit comes complete with Tennantor, Telegraph Key, Resistor, Condensers, Masonite Board, etc., and Schematic Diagram.

- KT-72 LESS BATTERY.....Net 2.99  
 ME-33 Cannon AM-15-1—Single headset.....Net 1.18  
 BA-154 Battery Burg. #27 or eq. (2 required) wt., ea. 1/2 oz. Net ea. .10

## 4 TRANSISTOR TELEPHONE PICK-UP AMPLIFIER KIT

- FOR FAMILY AND BUSINESS GROUP LISTENING
- HI-GAIN AMPLIFIER FOR PHONO AND MIKE

17.95




Lafayette's new Super-Sensitive 4 Transistor Telephone Pick-up Amplifier with class "B" push-pull output for efficient speaker operation. Permits the whole family to enjoy phone conversations. Invaluable on long distance calls, as well as for group listening on business calls and conferences. No need for extension phones! Just place the pickup coil under the telephone cradle base, or in case of metallic base, near phone receiver and you'll marvel at how loudly and clearly the two-way conversation comes through the speaker. Uses transformer coupling for optimum performance. The kit comes complete with all parts including 4 transistors, 3 transistor audio transformers, speaker, volume control, an attractive ripple-finish metallic cabinet, a pre-cut metallic chassis that makes mounting and wiring of parts a "snap", wire and solder, less battery and pick-up coil. Includes easy-to-follow illustrated instructions. Size 4 1/2" H x 4 1/4" W x 4 1/4" D. Shpg. wt., 3 lbs.

- KT-131 Complete Kit Less Battery & Pickup Coil.....Net 17.95  
 BA-180 Battery 9 v. Burg. 2N6 or eq. wt., 5 oz. Net 1.30  
 MS-16 Telephone Pickup Coil Shpg. wt., 4 oz. Net 1.95

## 3 TRANSISTOR HI-FI PREAMPLIFIER KIT

With Volume, Bass and Treble Controls

16.95



Lafayette 3 Transistor Hi-Fi Preamplifier Kit KT-117 provides the voltage gain necessary for the operation of even the lowest level magnetic cartridges and microphones. It may be used with Hi-Fi equipment to provide stable, low noise preamplification with extremely low power consumption, zero hum and without any microphonics inherent in vacuum tube preamplifiers. It is ideal as a remote preamplifier since it is battery operated and can be connected by cable up to 175 ft. from associated equipment. It has its own Bass and Treble controls for improved quality of reproduction, and uses 3 quality audio transistors. Frequency Response is 20 to 20,000 cycles. 40 db maximum gain. Zero hum level. Noise level—approx. 48 db below 10 millivolts input for high impedance cartridge, better than 52 db below 2 millivolts for low impedance cartridges. Four Inputs: Three phono inputs—high output cartridges, high impedance variable reluctance cartridges and low impedance low output cartridges; Microphone Input. From 0.5 to 1 volt output; Controls—Phono—Microphone, Hi-Low Level, Power, Volume, Bass and Treble. Complete with all parts, transistors, prepunched chassis, and detailed step-by-step instructions. 1 1/2" x 3 3/4" x 1 1/2".

- KT-117—Complete Kit Less Battery.....Net 16.95  
 BA-178 Battery 9V BURGESS 2U6.....Net .95


## LAFAYETTE 10-IN-1 LAB KIT

• EDUCATIONAL • PRACTICAL

You Build:

1. RADIO RECEIVER
2. PHONO-MICROPHONE AMPLIFIER
3. PHONO OSCILLATOR
4. BROADCAST STATION
5. CODE PRACTICE OSCILLATOR
6. SIGNAL TRACER
7. CAPACITY OPERATED RELAY
8. ELECTRONIC TIMER
9. ELECTRONIC SWITCH
10. PHOTOCELL RELAY

12.95

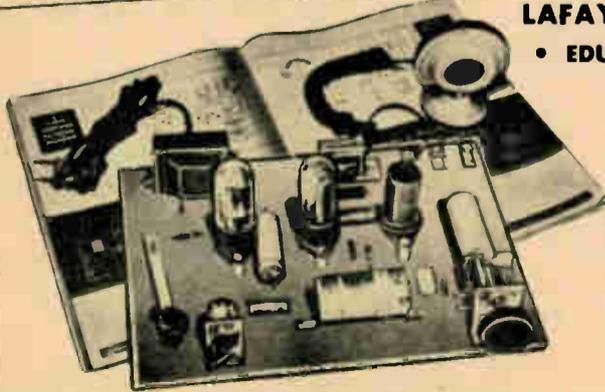

Here is a new laboratory tested experimenters kit designed to provide maximum instruction and entertainment and which is ideal for both the beginner and advanced experimenter. Features practical and interesting circuits which enable you to do many novel and interesting things while learning how these circuits function. You can broadcast your voice or play a phonograph through your radio from anywhere in the house, send code through a headpiece or radio, or use light or body capacitance to activate electrical circuits. Safe, low voltage is utilized. Kit is complete with perforated mounting board, 3 vacuum tubes, microphone and all parts necessary for construction. A detailed 12 page instruction manual contains simple-to-follow pictorial and schematic diagrams for each project. Less headphones, photoelectric cell and socket, wire and solder. Shpg. wt., 5 lbs.

- KT-36A.....Net 12.95  
 PHOTOELECTRIC CELL TYPE 848. TUBE Shpg. wt., 8 oz. Net 3.75  
 AMPHENOL 77MIP4 SOCKET FOR ABOVE Shpg. wt., 1 oz. Net .08  
 ME-33 CANNON AM-15-1 1000 OHM SINGLE HEADPHONE. Shpg. wt., 1 lb. Net 1.18

## NEW! "SUNFLEX" 2 TRANSISTOR REFLEX RADIO RECEIVER KIT

- FOR SOLAR OR FLASHLIGHT BATTERY OPERATION
- NPN-PNP COMPLEMENTARY SYMMETRY CIRCUIT SUPER-REFLEXED FOR 3 TRANSISTOR PERFORMANCE
- BUILT-IN "HI-Q" FERRITE ANTENNA

An efficient and economical miniature receiver kit for earphone operation. Uses one NPN transistor one PNP transistor and a crystal diode in an ingenious reflexed complementary symmetry circuit for 3 transistor performance. Gives surprisingly good reception of local stations in most locations without external antenna or ground connections. Antenna plug-in lead supplied for reception of distant stations. Current drain is less than 1 milliamper. Operates on 2 inexpensive penlight flashlight batteries (3 volts) or will give lifetime performance in sunlight or under artificial light with use of amazing new silicon solar battery (not supplied). Ideal for the beach, ball games and other outdoor uses as well as for indoors. Complete with all parts, transistors, diode, perforated chassis, two-tone plastic case, wire, solder and easy to follow instructions. Size 4 1/2" x 3-5/8" x 1-5/8". Shpg. wt., 1 lb. KT-132—KIT (less earphone).....Net 11.95  
 MS-260 — Super power dynamic earphone Shpg. wt., 3 oz. Net 2.95  
 MS-420 Solar battery wt. 2 oz. Net 7.75  
 BA-155 Penlight cells (2) wt., ea. 1 oz. Net ea. .10

## MIGHTY SUBMINIATURE "HELIODYNE" SOLAR SILICON BATTERY

- LATEST, MOST EFFICIENT TYPE OF SUN BATTERY
- USED BY ARMED SERVICES TO POWER ELECTRONIC EQUIPMENT

The most efficient type of solar battery yet developed to generate electrical energy from sunlight or from light rays from other sources. Rated 3.2 volts at 2 milliamper. Ideal for operating Lafayette "Sunflex" Radio Receiver Kit or any other receiver drawing up to 2 ma at 3 volts. 1-1/16" L x 3/32" W. Shpg. wt., 2 oz.



7.75

- MS-420—"HELIODYNE" SILICON SOLAR BATTERY.....Net 7.75



# Save 33 1/3 to 50% on MINIATURE-TRANSISTOR & R/C Equipment

## NEW! Lafayette's SUPER-TROL R/C EQUIPMENT



**(A) RADIO CONTROL TRANSMITTER:** Assembled-tested-guaranteed. No license examination required for operation. Crystal controlled for stability and to meet F.C.C. regulations. Uses powerful 3A5 tube for range of approximately one mile. Will operate any 27.265 mc R/C receiver. Overall dimensions only 8 1/2" x 2 3/4" x 1 1/4" — just a handful! Includes antenna — tube — crystal — and instructions. Less Batteries. Shpg. wt., 2 1/2 lbs. Just fill out enclosed FCC forms for station license.

**F-249** Net 14.95  
Batteries required: BA-124 Burgess U30 (3 needed) 1.75 ea. BA-157 Burgess #2 (1 needed) .13 ea.

**(B) RADIO CONTROL RECEIVER:** Completely wired and tested receiver — extremely sensitive and stable. Completely enclosed — ideal in boats — or case may be removed if desired! Ingeniously constructed to withstand vibration and shock. Features external fine tuning — antenna "snap" lead — plug for power and actuator connections. Ideal Companion for F-249 Transmitter and F-327 Servo shown elsewhere on this page. Requires one 1.5V battery and one 67.5 Volt battery. Size determined by use. Measures only 3" x 2 3/4" x 1 1/4". Complete with tube and instructions. Less batteries. Shpg. wt., 8 oz.

**F-208** Net 8.95  
Batteries required: BA-130 Burgess UX45 (1 needed) 2.07 ea. BA-157 Burgess No. 2 (1 needed) .13 ea.

### SPECIAL COMBINATION OFFER

**F-259** — Combination Consists of R/C Transmitter (F-249), and R/C Receiver (F-208) ..... 2.00 Down ..... Net 22.90

## NEW! LAFAYETTE 27.255 MC CITIZEN BAND REMOTE CONTROL TRANSMITTER KIT KT-127

- WAY OVER 1 MILE LINE OF SIGHT TRANSMISSION!
- SUPER STABILITY FOR FOOLPROOF CONTROL OF MODEL PLANES, BOATS AND CARS.

Once again Lafayette spurts into the lead with its new amazing RC CITIZEN BAND TRANSMITTER. You'll marvel at the neatness and simplicity of its layout and at the dependability of its crystal controlled circuit. Fits comfortably in the palm of your hand — yet is so stable that it is unaffected by hand capacitance or motion. Has new attractive wide-scale meter for visually tuning transmitter for optimum foolproof performance. Has wide, non-critical tuning. Uses one B & W prewound coil — no tedious winding of coils! Tuning for maximum output and antenna loading adjustment easily performed from exterior of cabinet. Complete with approved telescoping antenna, meter, cabinet, chassis, tube, crystal, alignment tool, all parts and easy step-by-step instructions. Just fill out enclosed FCC forms for station license.



**KT-127**, Less Batteries ..... Net 15.95  
1 BA-157 Burgess No. 2 (RCA VS036) Battery ..... Net .13  
2 BA-133 Burgess P45 (RCA VS218) Battery @ 2.17 ..... Net 4.34

### DYNAMIC EARPHONES

- FOR TRANSISTOR AND SUBMINIATURE RECEIVERS
- FOR SILENT RADIO AND TV LISTENING

A sensitive all-purpose earphone designed with both your listening pleasure and pocketbook in mind. Excellent range and excellent tone combine to provide excellent reproduction. Lightweight, equipped with a practically invisible ear support, that slips comfortably over either ear, from which the earphone can slip out or fall. Ideal for use with TV and radio sets, amplifiers, miniature and transistor receivers, etc. Attractive unit with shiny chrome finish. Complete with a 3 ft. cord. A super value at this price. Shpg. wt., 5 oz.



**MS-591** 6 ohm impedance with subminiature phone plug ..... Net .79  
**MS-365** 6 ohm impedance, with phone tip plugs. For silent radio or TV listening ..... Net .98  
**MS-367** 2000 ohm impedance, with phone tip plugs ..... Net 1.15  
**MS-368** 3000 ohm impedance with subminiature phone plug and matching phone jack ..... Net 1.05



## "JEWEL" REMOTE CONTROL RELAY

2.75

A natural for remote control receivers, it is highly sensitive, and built to withstand severe crashes. The smallest commercial job available, it weighs less than 1/2 oz. Factory adjusted to pull in at 1.4 MA. drop out at 1.2 MA D.C. Single pole, double throw. Used in outstanding R/C receivers. 5,000 ohm coil. **IMPORTED TO SAVE YOU MONEY.**

**F-260** — Relay ..... Net 2.75

## SERVICEMAN'S SPECIAL! MINIATURE REPLACEMENTS FOR JAPANESE 6 TRANSISTOR RADIOS



**FIG. A IF TRANSFORMERS** — Specially constructed for extra efficient performance in Japanese 6 transistor printed circuit superheterodyne radios. Adjustable core easily accessible from top. Size: 31/64" x 13/32" x 13/32" less terminals. Shpg. wt., 3 oz.  
**MS-764** 1st IF Transformer ..... Net .59  
**MS-751** 2nd IF Transformer ..... Net .59  
**MS-752** 3rd IF Transformer ..... Net .59

**FIG. B OSCILLATOR COIL** — Excellent for above transformers as well as for most Japanese superhet receivers. 31/64" x 13/32" x 13/32" less terminals. Shpg. wt., 3 oz.  
**MS-753** ..... Net .59

**FIG. C ANTENNA COIL** — Highly efficient ferrite antenna coil for Japanese superhet receivers. 437 microhenrils, Q is 200 at 1000 kc. 2 3/4" x 1/2" x 3/16". Shpg. wt., 4 oz.  
**MS-754** ..... Net .59

### REMOTE CONTROL ESCAPEMENT

- AT THE LOWEST PRICE ANYWHERE!



A sturdy 2 arm self-neutralizing escapement. Completely wired (not a kit). Converts electrical impulses from remote control receiver to mechanical motion for varying movement of plane, boat, or car. Four 90° rotations — two by armature activation, two by neutralization. Has ratchet governor for maintaining foolproof rotating speed. Weighs only 7/8 oz. Size: 1-3/8" L x 2" W overall. Shpg. wt., 5 oz.

**F-255** ..... Net 2.45

### REMOTE ENGINE CONTROL ESCAPEMENT

Lafayette's exciting new air-bleed self-neutralizing remote engine control. Varies engine speed of your model. Neutral position of one arm is low speed, neutral position of 2nd arm is high speed, and maintained activated position of either arm (armature activated) stops motor. Perfect mate for Lafayette F-256. Compact and weighs only 3/4 oz. Requires 1-1/2 volt battery. Low current drain. Size: 1-5/8" x 1" x 3/4". Shpg. wt., 5 oz.

**F-257** ..... Net 3.45

### COMPOUND REMOTE CONTROL ESCAPEMENT

- LAFAYETTE'S AMAZING VALUE IN A 4-ARM SELF-NEUTRALIZING COMPOUND ESCAPEMENT!
- NO NEED TO WORRY ABOUT LOSING YOUR MODEL!



You have no sequence of operation to worry about! Simple as A B C! One pulse always gives right turn; two pulses always gives left turn. Three pulses closes the circuit for the supplementary control such as motor (F-257) or elevator, if used. The rudder always returns to neutral position after any turn as soon as transmitter keying button is released. With ratchet governor for foolproof operation. Sturdy construction — low current drain. Uses 1-1/2 volt battery. Weighs 1-1/8 oz. Size: 2-7/8" L x 1-9/16" overall. Shpg. wt., 6 oz.

**F-256** ..... Net 3.95

### NEW! COMPLETE TRANSISTOR BROADCAST RECEIVER COIL KIT

- MINIATURE 2-GANG POLY-VARI-CON TUNING CONDENSER
- 3-455KC IF'S ● OSCILLATOR ● FERRITE LOOP ANTENNA
- MATCHED MICRO-MINIATURE COILS



A complete set of matched micro-miniature coils for use in subminiature transistorized radio receiver circuits. Shielded IF and Oscillator coils measure only 7/16" high above chassis and are 3/8" in diameter! Correct impedances are provided for maximum gain in transistor circuits; high "Q" coil design and impregnation for maximum stability make these units hard to beat at any price!

The oscillator coil has an inductance of 261 μh, variable ± 20% by means of a tuning slug. The 1st IF coil (converter output) primary impedance 15,000 ohms; secondary 350 ohms; center frequency 455KC. The 2nd IF (interstage) the same but secondary 500 ohms. The 3rd IF (detector) also the same except secondary 5,000 ohms. The ferrite loop antenna is flat type, 2 1/2" long x 9/16" w x 1/4" thick. Includes famous Poly-Vari-Con 2-gang tuning condenser. Shpg. wt. of kit is 1 lb.

**MS-450** ..... Net 3.95

### SUBMINIATURE TRANSISTOR RECEIVER COIL KIT

Includes same set of high "Q" miniature components as MS-450 except for the tuning condenser.

**MS-440** Same as above, less tuning capacitor ..... Net 2.49

### POWER TRANSISTORS EACH UNIT FACTORY TESTED TO MEET SPECIFICATIONS



EQUIVALENT TO: CBS 2N256, SYLVANIA 2N307, MOTOROLA 2N554

Reg. Value 1.35  
**77¢**

**SP-147** Power Transistor ..... Net .77

### GENERAL PURPOSE DIODES



EXCELLENT DETECTOR FOR TRANSISTOR AND VACUUM TUBE RADIO RECEIVERS

EQUIVALENT TO: 1N34, 1N34A, 1N38A, 1N48, 1N56, 1N69

**29¢** 10 for **2.59** Each

**SP-148** General Purpose Diode ..... Net .29 each 10 for 2.59

### 27.255 R/C CRYSTAL



Reg. 2.95  
**1.95**

Specially manufactured for Lafayette. Designed specifically for use in R/C model planes, boats, cars, etc. Low-drift — high output — dependable frequency control. Tolerance .04%. 13/16" wide x 7/16" deep x 1/8" high above pins. Pins on 1/2" centers.

**MS-446** ..... Net ea. 1.95



**MATCHING CRYSTAL SOCKET:** Made of special low loss phenolic. Easily mounts flush or stand-off. Small — light — rugged.

**MS-447** ..... Net ea. .15

### miniature TELESCOPING ANTENNA



**.59**


RETRACTS to 9 INCHES with PLASTIC CASE

3-section antenna of chrome-plated brass. Plugs into Jack supplied. 38" fully extended and retracts to 9". Comes in a flexible plastic case with slip-under protecting flap.

**F-343** Telescoping Antenna ..... Net 59¢

### LAFAYETTE PNP AUDIO TRANSISTOR SPECIAL!

AS LOW AS **37¢**



General audio type PNP transistor for experimenters and hobbyists, for code practice oscillators and similar small signal devices. In new JETC 30 welded case.

**SP-146** ..... Net, singly, each 59¢  
10 for 4.50, 50 for 19.50, 100 for 37.00

### ANOTHER LAFAYETTE FIRST!

TOSHIBA, HITACHI AND NEC HIGH QUALITY REPLACEMENT TRANSISTORS FOR POPULAR JAPANESE TRANSISTOR RADIOS.

#### SERVICEMEN'S SPECIALS!



EACH TRANSISTOR MEETS TOP SPECIFICATIONS

STOCK NO.	USE	TOSHIBA	HITACHI	NEC	NET
SP-151	Conv.	2N52	HJ23	ST37D	1.39
SP-152	1st IF	2N48	HJ22	ST28C	1.39
SP-153	2nd IF	2N45	HJ21	ST28C	1.39
SP-154	Driver	2N44	HJ15	ST30B	1.39
SP-155	Output	2N38	HJ17	ST342	1.19

Average shpg. wt., 2 oz.

\*Same as 1st IF. Use SP-152  
†2 Units used in Push-Pull output.  
NKC — Nippon Electric Co.  
All 2N's Types within each category completely interchangeable. HITACHI HJ215, HJ217, HJ221 and HJ221 equivalents of HITACHI HJ15, HJ17, HJ22 and HJ23 respectively.

### PLASTIC CASE FOR MINIATURE EQUIPMENT



Beautiful pocket sized modern streamlined case with rounded corners and removable snap-on cover. This is an ideal case for that transistorized receiver — or other miniature or subminiature preamplifier, amplifier, oscillator or transmitter. Two pre-drilled apertures, a 2 3/8" diameter opening ideal for Poly-Vari-Con tuning capacitor and a 5/16" opening ideal for volume control and switch. In addition, there are two small openings on the side for such internal leads as antenna or earphone. Experimenters, builders and hobbyists will want to stock up on several of these cases at this low bargain price. Size: 4 1/2" x 2 1/2" x 1 1/4". Shpg. wt., 6 oz.

**MS-302** ..... Net 95¢

### NEW! Lafayette Super-Value Sun Battery

QUANTITY LIMITED! Sensational buy enables Lafayette to offer this famous selenium photocell at a small fraction of its normal price! Approx. 8 MA current output at 100 ft. candles with 55 ohms load! .5 volts open circuit voltage in av. sunlight. 30 MW power output at 100 ft. candles with 1000 ohm load! Truly a super buy for the experimenter, kit builder, etc. With colored pigtail leads. 1 1/4" diam.



**MS-543** ..... Net 1.47

### TRANSISTOR OUTPUT TRANSFORMER



Only 3/4" x 7/8" x 1-1/16". 2000 ohm primary to 10 ohm voice coil. Matches most transistor outputs. Shpg. wt., 8 ozs. .... Net 69¢

### SUPER MICRO-MOTORS

- HALF THE WEIGHT— TWICE THE POWER!
- HIGHER SPEED—LOWER DRAIN!
- PERMANENTLY LUBRICATED!
- DOUBLE PERMANENT FERRITE MAGNETS!



Expertly designed, miniature, D.C. permanent magnet motors. Ruggedized construction for industrial use. Highest power and speed to weight ratio of any miniature motor makes these a "natural" for models and remote control applications. Ferrite magnets preclude possibility of demagnetization and offer minimum weight. Unique, precision formed device permanently centers commutator in precise position. Utilizes phosphor-bronze brushes and brass sleeve bearings. May be mounted by means of motor mount supplied or by means of tapped hole in motor case. Avg. Shpg. wt., 4 oz. Complete with leads. Shaft diameter 3/32"

Stock No.	Volt. Range	Ordn. Ma.	RPM	H.	W.	L.	Wt.	NET EA.	LOTS 3 EA.
F-403	1.5-4.5	200-300	5000-6000	1"	1 1/4"	1 1/2"	1 1/2 oz.	.69	.62
F-404	3-6	250-300	6000-7000	1 1/4"	1 3/4"	2 1/4"	2 1/2 oz.	1.10	.98
F-405	1.2-1.6	90-140	8000-9000	1 1/2"	1 3/4"	1 3/4"	2 1/2 oz.	1.39	1.25

## NEW! EICO STEREOHONIC



### DUAL PREAMP KIT

Self-powered preamp-control center offering complete switching and control facilities for any stereo program source.

**SPECIFICATIONS** (both channels):  
Frequency response 5-200,000 cps  $\pm 0.3$  db; IM distortion (60 & 7000 cps) .03% @ 1 v. RMS output; Harmonic distortion (20-20,000 cps) .1% @ 3 v. RMS output; Tone-control range  $\pm 15$  db @ 50 and 10,000 cps; RIAA phono and NARTB tape head (15, 7.5, and 3.75 ips) equalization; Output-to-main amplifier impedance, 8000 ohms. Tubes: 5-12AX7/ECC83's, 1-6X4. Size: 3 3/4" high, 12" wide, 8 1/2" deep. Shpg. wt., 10 lbs. Cover supplied.

HF85K Stereo Dual Preamp Kit  
G-492 2.00 Down Net 39.95  
HF85 Same, Factory wired and tested  
G-493 5.00 Down Net 64.95

## EICO Model HF-81K STEREOHONIC



### DUAL AMPLIFIER- PREAMP

Only 69.95

A handsome complete hi-fi stereophonic control center with 2 matched Williamson type push-pull EL84 power amplifiers, all on one chassis. Output Power - rated 28 watts (continuous) for monaural, 14 watts for stereo. Freq. Response -  $\pm 5$  db, 10 to 100 kc at 2 w out. IM Distortion (60 and 6000 cps at 4:1) - 0.5% at 10 watts out. Harmonic Distortion - less than 1% from 40-10 kc at 20 w output. Sensitivity for rated output - mag phono: 4 mv; tape head: 2 mv; mic: 6 mv; tuner and auxiliaries: 0.5 v. Hum and Noise Level (below 14W): - 56 db on low level input, - 75 db on high level inputs. Bass -  $\pm 15$  db at 50 cps. Treble -  $\pm 15$  db at 10 kc. Speaker Connections - 4, 8, & 16 ohms. Tubes - 4 ECC83/12AX7, 2 ECC82/12AU7, 4 EL84, 2 EZ81. Size 15 x 10 1/2 x 4 1/4". Shpg. wt., 24 lbs.

Model HF-81K. Kit complete with cover  
G-490WX 5.00 Down Net 69.95  
Model HF-81 as above, but factory wired.  
G-491WX 5.00 Down Net 109.95



### FM TUNER HFT-90

newly-designed, extremely sensitive, low-noise "front end" supplied in a cast housing completely pre-wired, pre-aligned, ready to use. Employs the broad-band detector circuitry used in \$169 FM tuners now on the market. Also features new DM-70 traveling tuning eye. Input 300 ohms, IF bandwidth 260 kc, detector separation of 600 kc. Freq. resp. 20-20,000 cps  $\pm 1$  db. Audio output 1 V for 10 v input with 75 kc deviation. Hum 60 db below 1 V. Cathode follower and multiplex outputs. Flywheel slide-rule tuning, AGC, stabilized low limiting threshold for excellent performance from weaker signals, broad-band ratio detector for improved capture ratio and easier tuning, full-wave rectifier and heavy filtering, very low distortion. Uses 1-ECC85/6AQ8, 3-6AU6, 1-6AL5, 1-6CA, 1-DM70, 1-6X4. Flexible "low silhouette" design adaptable to any panel thickness for console installation; optional cabinet. HWD: 3 3/4" x 12" x 8 1/4". Operates from 110-125 VAC, 60 cps line. Shpg. wt., 10 lbs.

HFT 90K FM TUNER KIT (less cover)  
G-422 2.00 Down Net 39.95  
HFT 90 Factory wired and tested tuner.  
G-423 5.00 Down Net 65.95  
E-5 Cover for above  
G-431W Net 3.95

## EICO 12-WATT WILLIAMSON- TYPE HI-FI AMPLIFIER . . . PREAMP . . . CONTROL SECTION



Compact, attractively styled amplifier with complete front end facilities and true high fidelity performance. Direct tape head and magnetic phono inputs with NARTB (tape) and RIAA (phono) feedback equalizations. Dual triode circuit for variable turnover bass and treble feedback-type controls. Power output: 12 watts continuous, 25 watts peak. Intermodulation distortion 1.5% at 12 watts, 0.55% at 6 watts, 60 to 6000 cps. Frequency response: 12-50,000 cps  $\pm 0.5$  db at 1 watt; 25-20,000 cps  $\pm 0.5$  db at 12 watts. 4 Controls: Selector switch, level control, bass and treble controls. Speaker connections for 16, 8, and 4 ohms. Tubes: (2) ECC83/12AX7, ECC82/12AU7, (2) EL84, EZ81. Size: 3 3/4" H, 12" W, 8 1/2" D. Shpg. wt. 13 lbs. With instructions.


HF 12K-Complete Kit.  
G-424 2.00 Down Net 34.95  
HF 12-As above, factory wired.  
G-425 5.00 Down Net 57.95

## NEW EICO MODEL HF87K 70-WATT STEREO HIGH FIDELITY DUAL POWER AMPLIFIER KIT

This superb dual 35 watt amplifier kit utilizes a cathode-coupled phase inverter-driver circuit. Frequency response:  $\pm 0.5$  db 5 cps 100 kc. Harmonic distortion less than 1%. From 20 to 20,000 cps within 1 db at 70 watts. Damping factor: above 11. Sensitivity: 0.38v for full output. Channel separation: 55 db. Controls—Level Ch. 1, Level Ch. 2, "Service Selector" switch, On-Off switch. Speaker connections: 4, 8, 16, 32 ohms. Tubes—1-ECC83/12AX7, 2-6SN7GTB, 4-EL34, 2 silicon diode rectifiers—215 watts, 117v, 60 cps. Size 15x11x6". Shpg. wt., 32 lbs.

G-496WX Kit 5.00 Down Net 74.95  
HF87 Same as above, but factory wired  
G-497WX 5.00 Down Net 114.95

## EICO 20 WATT HIGH FIDELITY



### AMPLIFIER KIT MODEL HF20K

High quality equalizer and control section plus 20 watt Ultra-Linear Williamson-type power amplifier. Low distortion feed-back equalization; 5 equalizations provided for LP's and 78's including RIAA. Variable turnover, low distortion feed-back tone controls.

Six inputs: 4 high level switched inputs—Tuner, TV, Tape, Auxiliary (crystal/ceramic phono or second tuner); 2 low level inputs (not switched)—provides proper pick-up loading and attenuation for all leading magnetic, FM and high quality crystal cartridges without changing resistors. Hum balance control for balancing out 60 cycle residual hum. Power Consumption: 110-120 volts, 60 cps, 100 watts. Tubes: 2-12AX7, 2-12AU7A, 2-EL84, 1-5U4GB. Hand-somely styled to eliminate the necessity for cabinetry. Size: 8 1/2" H, 15" W, 10" D. Shpg. wt., 24 lbs.

G-502WX HF-20—KIT . . . 2.00 Down Net 49.95  
G-503WX Factory Wired 5.00 Down Net 79.95  
G-428W ENCLOSURE FOR HF20 . . . Net 4.50


## EICO 30-WATT HI-FI INTEGRATED AMPLIFIER KIT with PREAMPLIFIER EQUALIZER AND CONTROL SECTION



Combines exceptional power supply reliability of the power amplifier section with an extremely versatile preamplifier control section. Has 3 low level inputs for magnetic phono tape head and microphone and 3 high level inputs for TV or tuner, crystal or ceramic cartridge or tape; 4 phono equalizations and NARTB tape head equalization with equalization circuit of extremely low distortion. IM DISTORTION: 2% at 30 watts, 0.5% at 10 watts. HARMONIC DISTORTION: Below 1% 20 cps-20KC 1 db below 30 watts. FREQUENCY RESPONSE: At 30 w  $\pm 0.5$  db 15 cps - 50KC;  $\pm 1.5$  db 15 cps - 100KC;  $\pm 0.1$  db 15 cps - 30KC at any level from 1 mw to 30 w. SQUARE WAVE RESPONSE: 20 cps to 30 KC essentially undistorted. SPEAKER CONNECTIONS: 4, 8 and 16 ohms. SENSITIVITY (input for rated output): Mag Phono-5 mv, Tape Head - 2 mv, Mic - 4 mv, High level - 2 mv. TUBES: 2 - ECC83/12AX7, 2 - EC90/6CA, 4 - EL84, 2 - EZ81. POWER REQUIREMENTS: 117V, 60 cps; 140 watts consumption. Size: 15" x 4 3/4" x 10 1/2". Shpg. wt., 28 lbs.

G-420WX HF32K KIT . . . 5.00 Down Net 57.95  
G-421WX HF32 Factory Wired 5.00 Down Net 89.95  
G-504 HF30K basic power amplifier Kit, less cover. Shpg. wt., 17 lbs. . . . 2.00 Down Net 39.95  
G-505 HF30 Factory Wired. 5.00 Down Net 62.95  
G-506 E-4 Matching Cover . . . Net 3.95

## NEW! EICO BASIC AMPLIFIER KITS

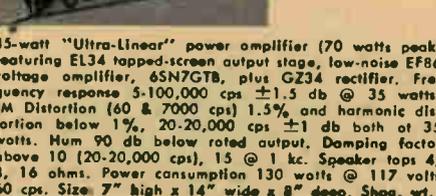

35-watt "Ultra-Linear" power amplifier (70 watts peak) featuring EL34 tapped-screen output stage, low-noise EF86 voltage amplifier, 6SN7GTB, plus GZ34 rectifier. Frequency response 5-100,000 cps  $\pm 1.5$  db  $\pm 35$  watts. IM Distortion (60 & 7000 cps) 1.5% and harmonic distortion below 1%, 20-20,000 cps  $\pm 1$  db both at 35 watts. Hum 90 db below rated output. Damping factor above 10 (20-20,000 cps), 15 @ 1 kc. Speaker taps 4, 8, 16 ohms. Power consumption 130 watts @ 117 volts 60 cps. Size: 7" high x 14" wide x 8" deep. Shpg. wt., 25 lbs.

G-412WX HF-35K Amp. Kit. 2.00 Down Net 47.95  
G-413WX HF-35 Factory Wired. 5.00 Down Net 72.95  
G-414 E-2 Matching Enclosure . . . Net 4.50

Five-tube "Ultra-Linear" hi-fi amplifier rated 22 watts continuous, 44 watts peak. Low-noise EF86 direct-coupled to 6SN7GTB drives push-pull 6L6GB tapped-screen output stage. Will handle 4, 8, 16 ohm speakers, including electrostatics. Frequency response  $\pm 1.5$  db, 5-100,000 cps @ 22 watts. IM distortion (60 & 7000 cps) 1%, harmonic distortion below 1% from 20-20,000 cps  $\pm 1$  db, both at 22 watts. Hum 85 db below rated output. Sensitivity 0.6 volt for 22 watt output. Damping factor above 12 (20-20,000 cps), 21 @ 1 kc. Power consumption 90 watts from 117 v, 60 cycle source. Size: 7" high x 14" wide x 8" deep. Shpg. wt., 25 lbs.

G-415WX HF-22K Amp. Kit 2.00 Down Net 38.95  
G-416WX HF-22 Factory wired. 5.00 Down Net 61.95  
G-414 E-2 Matching Enclosure . . . Net 4.50

Williamson-type 14 watt (28 watts peak) power amplifier at low cost for both stereo and monaural installations. Frequency response  $\pm 0.5$  db, 10-10,000 cps @ 1 watt. Harmonic distortion less than 1% (50-10,000 cps) and IM distortion (60 & 7000 cps) 2%—both @ 14 watts. 20 db inverse feedback. Damping factor above 8 (20-15,000 cps). Hum 90 db below rated output. Tubes: 1-ECC83/12AX7, 2-EL84, 1-EZ81. Speaker taps 4, 8, 16 ohms. Size: 3 1/4" high x 12" wide x 4" deep. Shpg. wt., 10 lbs.

G-417 HF14K Amp. Kit. 2.00 Down Net 23.50  
G-418 HF14 Factory wired. 2.00 Down Net 41.50  
G-419 E-6 Matching Enclosure . . . Net 4.50

## EICO HIGH FIDELITY AM TUNER KIT HFT94K

The new HFT94K is a basic AM tuner kit designed for hi-fi applications. The DM-70 traveling eye indicator is pre-wired. Sensitivity: 3 mv. at 30% mod. for 1 v. output. Selectivity: Frequency response: 20-9000 cps (wide), 20-5000 cps (narrow). Output: low impedance plate follower. Extra recording output. Controls: Bandwidth Selector, Level/Power, Tuning. For 110-125 V., 60 cps. Size: 3 1/2 x 12 x 8 1/2". Shpg. wt., 12 lbs.

G-500 Kit 2.00 Down Net 39.95  
HFT94 Same as above, but factory wired.  
G-501 5.00 Down Net 65.95

## EICO MODEL AF-4K



### COMPLETE STEREOHONIC DUAL AMPLIFIER KIT

The Model AF-4K kit consists of two highly fed-back, four watt amplifiers preceded by complete facilities for stereo/monophonic operation. Controls include: Selector (AM, FM, FM Multiplex, Aux., High-level Phono), Mode (Amp 1, Amp 2, Norm., Reverse, Mon. Phono, Mon. Aux.), Independent, concentric level and tone controls, On-Off switch. Frequency response  $\pm 0.5$  db 30-20,000 cps. Harmonic distortion, less than 1% at 4 watts. Sensitivity (for 4 W. output/channel): .26 V. (phono), .113V (other inputs). Hum: - 74 db below full output. Speaker connections: 4, 8, 16, 32 ohms. Tubes: 2 - 12DW7, 2-EL84, 1-EZ81. Size: 3 1/2 x 12 x 8 1/4". Shpg. wt., 13 lbs.

G-498 Kit 2.00 Down Net 38.95  
AF-4 Same as above, but factory wired.  
G-499 5.00 Down Net 64.95

## PACO MODEL SA-40 STEREO PREAMP AMPLIFIER KIT

SA-40 combines a dual 20 watt amplifier and versatile preamplifier in one easy-to-build kit. PERFORMANCE SPECIFICATIONS - RESPONSE: 30-90,000 cps,  $\pm 1$  db. DISTORTION: Less 0.2% harmonic and 1% intermodulation per channel. INPUTS: 14 total. OUTPUTS: Dual tape, Separate Preamp, Dual Speaker. HUM AND NOISE LEVEL: Up to 80 db below rated output. SPEAKER TAPS: 4, 8, 16, 32 ohms. SENSITIVITY: Tuner and Aux. 0.75 v., Mag. Phono-1.5 mv., Mag. Phono-2.5 mv., or 0.3 v. Ceramic TAPE OUTPUT LEVEL: 2 v., unaffected by Loudness or Tone settings. 9 tubes plus 2 silicon and 1 selenium rectifier. For 117 v. 50-60 cycles AC. 15 1/2" W x 11 1/2" D x 5 1/2" H. Shpg. wt., 23 lbs. Complete with case and step-by-step assembly-operation manual.

G-590WX 5.00 Down Net 79.95  
G-591WX SA-40, Factory Wired 5.00 Down Net 129.95

## DYNAKIT PAS-2 STEREO PREAMPLIFIER KIT



The PAS-2 stereo preamplifier includes two independent preamplifier-control channels with complete stereo facilities. Inputs: 3 stereo low level and 4 stereo high level. Outputs: low impedance audio output and tape output. Frequency response:  $\pm 0.5$  db 6-60,000 cps. Distortions: less than .05%. Noise: less than 3  $\mu$ v. equivalent noise input an RIAA. Gain: 60 db at 1000 cps on RIAA, 20 db on high level. Tubes: 4 12AX7/ECC-83, 6X4, selenium rectifier. Size: 13x8x4". Shpg. wt., 11 lbs.

G-453WX Kit 5.00 Down Net 59.95  
Dynakit PAS-2 Stereo Preamp. Same as above, but completely wired. Shpg. wt., 11 lbs.  
G-454WX 5.00 Down Net 99.95

## NEW DYNAKIT STEREO 70 70-WATT STEREO AMPLIFIER KIT

The stereo 70 has 2 independent power amplifiers capable of 35 watts for each channel or 70 watts of power for monophonic use. Frequency response:  $\pm 0.5$  db 10-40,000 cps. IM distortion: less than 1% at 35 watts. Sensitivity: 1.3 volts rms input for 35 watts output. Output impedance: 4, 8, 16 ohms. Minimum channel separation: 55 db. Size: 13x9 1/2x6 1/2". Shpg. wt., 32 lbs.

G-455WX Kit 5.00 Down Net 99.95  
Dynakit Stereo 70 Stereo Amplifier. Same as above, but completely wired.  
G-456WX 5.00 Down Net 129.95

## DYNAKIT PAM-1 HI-FI PRE- AMPLIFIER KIT

A quality preamp-control unit incorporating factory-wired printed-circuit module for easy assembly. Inputs: Low-level magnetic input, tape head, or mike. Outputs: Tape and audio output. Controls: Selector-equalization, bass, treble, volume, tone monitor, loudness, hum-balance. Phone Equalization: RIAA, 78 rpm. IM Distortion: Less than .05%. Response:  $\pm 0.5$  db 6-60,000 cps. Tubes: 2-ECC/12AX7 plus selenium stack. Power Requirements: 200-400 watts d.c. @ 3-4 mo. 6 volts a.c. @ .75 amps. Size: 2 1/2" high x 12" wide x 6" deep. Shpg. wt., 7 lbs. Choice of bone white or charcoal brown vinyl finish.

G-465 Kit 2.00 Down Net 34.95  
G-466 As above, but wired. 5.00 Down Net 59.95

## NEW DYNAKIT MARK III 60 WATT POWER AMPLIFIER KIT

Compact 60 watt basic amplifier. Accurate and simple bias setting independent of meter accuracy. Frequency response better than  $\pm .5$  db from below 6 cps to above 60 kc. IM distortion less than 1% at 60 watts, .5% below 50 watts and .04% at average listening levels. Less than 1% harmonic distortion within 1 db of 60 watts from 30 cps to 20 kc. 4, 8, and 16 ohm outputs. Utilizes 1 6AN8, 2 KT88 (or 6550), 1 GZ34 and selenium rectifier. All parts, tubes and protective cover included in kit. Shpg. wt., 28 lbs.

G-457WX Kit 5.00 Down Net 79.95  
G-458W As above, but wired 5.00 Down Net 99.95  
G-459WX Kit with 70.7 volt output for P.A. use 5.00 Down Net 84.95

## DYNAKIT MARK IV 40 WATT POWER AMPLIFIER KIT



The Mark IV is a 40 watt basic power amplifier. Power output: 40 watts continuous, 80 watts peak. Frequency response:  $\pm 0.5$  db 10-40,000 cps. IM distortion: less than 1% at 40 watts, less than .05% at 1 watt. Hum and noise: better than 90 db below 40 watts. Output impedance: 4, 8, 16 ohms. Sensitivity: 1.3 volts rms input for 40 watts output. Tubes: 2 EL-34, 7199, GZ-34, selenium rectifier. Finish with nickel chassis, and vinyl coated charcoal brown cover. Power consumption: 115 watts. Size: 5 x 14 x 6 1/2". Shpg. wt., 20 lbs.

G-449WX Kit 5.00 Down Net 59.95  
Mark IV 40 Watt Amplifier. Same as above, but completely wired. Shpg. wt., 20 lbs.  
G-450WX 5.00 Down Net 79.95

## DYNAKIT ACCESSORIES

P5-1 Dual Power Supply Kit. Shpg. wt., 4 lbs. Net 8.95  
G-460 Kit . . . Net 14.95  
G-461 As above, but wired . . . Net 14.95  
PM-1 Panel Mounting Kit for Preamp PAM-1. Shpg. wt., 2 lbs.  
G-462 Kit . . . Net 2.95  
PM-25 Panel Mounting Kit (2 PAM-1 & 1 DSC-1). Shpg. wt., 3 lbs.  
G-463 . . . Net 5.95  
CM-25 Walnut Cabinet Mount (2 PAM-1 & 1 DSC-1). Shpg. wt., 4 lbs.  
G-464 . . . Net 17.95

## ACROSOUND S1001 STEREO PREAMP KIT

Printed circuit board and modular design make construction simple and enjoyable. Unique features include Mike Dub Switch, balance control, and panel Light Matrix. SPECIFICATIONS - INPUTS: 2-MAG. Cort., 2-Tape Head, 2-Tuner (FM-AM, FM-FM Multiplex), Tape Input, Micro phono. OUTPUTS: 2-Main, 2-Tape, 3rd Channel. CONTROLS AND SWITCHES: Tape Monitor, Mike Dub, Input Selector (78, LP, RIAA-1, RIAA-2, Tape Head, FM-AM, FM-FM Multiplex, Aux.), 2-Bass, 2-Treble, Balance, Ganged Volume/Loudness, Output Selector (Check A, Check B, Stereo, Stereo Rev., Mon. AB, Mon. A, Mon. B), 1-Scratch, 1-Rumble, Phasing, Loudness In-Out, 4 A.C. outlets (2-switched). Input Sensitivity: 5 mv. low level, 30 mv. high level, 2 mv. tape head. 4 1/2" h x 12 1/2" w x 6 1/2" d. Supplied with ribbed aluminum cover in black satin finish, with sand-colored front panel. Shpg. wt., 10 lbs.

G-578WX Less power supply 5.00 Down Net 69.50  
Power supply kit for S1001 Shpg. wt., 5 lbs.  
G-579W Net 10.00

## ACROSOUND STEREO 20-20 DUAL BASIC AMPLIFIER KIT

A two-channel basic amplifier kit with common power supply. 18 watts per channel at 2% Harm., 1.5% IM distortion; 36 watts monaural. Individual level controls, stereo-monoaural switch. Dual speaker outputs: 4, 8, 16, 32 ohms. Response: 10-70,000 cps  $\pm 1$  db. A.C. 7 x 10 x 5 1/2" h. Shpg. wt., 18 lbs.

G-570WX 5.00 Down Net 69.50  
Stereo 20-20, Factory wired  
G-571WX 5.00 Down Net 99.50  
Stereo 20. Single channel amplifier Kit; specs equal to one channel of 20-20. 7 x 7 x 5 1/2". Shpg. wt., 13 lbs.  
G-574 2.00 Down Net 44.50  
G-575 Stereo 20, factory wired. 5.00 Down Net 64.50  
Stereo 20A. Stereo 20 Kit, requires power supply, from Stereo 20 or other source. Shpg. wt., 6 lbs. 7 1/2" x 5 1/2" x 5 1/2".  
G-572 2.00 Down Net 29.50  
G-573. Stereo 20A, factory wired. 2.00 Down Net 39.50  
ULTRA-LINEAR II. (not illustrated). 60 watt power amplifier Kit Size 7" x 15" x 8" h. Shpg. wt., 30 lbs.  
G-576WX 5.00 Down Net 79.50  
G-577WX As above, factory wired 5.00 Down Net 109.50

## NEW! HARMAN-KARDON CITATION I KIT

A high quality stereo-monoaural preamp-control unit. Inputs: 12 (six pairs) - Aux, Tape Amp, Tuner, low-level phono, high-level phono. Outputs: 5-20 main preamp outputs plus a third channel output, two tape outputs for recording. Mode selector chooses output types stereo, Blend, A + B, Channel A, Channel B; Stereo Reverse Switch provides proper orchestra orientation by reversing channel A + B. ON-OFF switch, IM DISTORTION: Less than 0.05% of 2 volts, Responses to  $\pm .5$  db 5-80,000 cps. Tubes: 9-ECC83/12AX7 plus silicon rect., Power Requirements: 110V AC, Size: 14 1/2" W x 12 1/2" D x 6" H. Shipping wt. 20 lbs. Gold & Charcoal brown finish.

G-230WX Kit 5.00 Down Net 139.95  
G-231WX Wired 10.00 Down Net 239.95  
G-232W Walnut Enclosure 5.00 Down Net 29.95

## NEW! HARMAN-KARDON CITATION II KIT

The perfect companion piece to the Citation I. Two ultra-linear type amplifiers deliver 60 watts each channel or a total of 120 monaural. Bias meter allows complete accurate balancing of output tubes. Frequency Response: 18-40,000 cps  $\pm 0$  to  $\pm 1.0$  db @ 60 watts, 2-80,000 cps  $\pm 0$  to  $\pm 1.0$  db @ 1 watt; IM Distortion: Less than .5% @ 60 watts, unmeasurable at normal listening levels. Harmonic Distortion: Less than 0.5%, 20-20,000 cps @ 60 watts. U-measurable at normal listening level. Output 4, 8, 16 ohms. Tubes: 6 - 12BV7, 4 - KT88, plus 4-Silicon Diodes & 1 Selenium rect., Dimensions: 16 1/2" W x 9" H x 11 1/2" D. Charcoal Brown & Gold finish. Shpg. wt., 60 lbs.

G-233WX Kit 5.00 Down Net 159.95  
G-234WX Wired 10.00 Down Net 219.95  
G-232WX Charcoal Brown Metal Enclosure Net 7.95

# TOP TOOL VALUES for HOME or SHOP



**SPRAYIT 400**

- COMPLETELY PORTABLE
- NOT A FLIMSY "VIBRATOR"
- FOR ALL PAINT-SPRAYING DUTIES

Here is a precision-built complete paint-spraying outfit manufactured to the highest professional standards and yet priced for the homeowners. With integral 1/2 H.P. motor compressor unit, not a vibrator. Now it's easy to do a professional-looking paint job, 4 times faster than with a brush. Use it for other spraying or blowing duties too. Spray adjustable from a dime size to 10" wide. Features an easy-to-use two-finger trigger gun; the body is guaranteed to be unbreakable. With 6 ft. cord, plug and 8 ft. of hose. Shpg. wt., 13 lbs.

HD-415—List 39.95..... 2.00 Down..... Net 29.95

**MULTI-COLOR KITS:** For best results in spraying multi-color paints, lacquers, enamels. Simple, quick-change, nozzle. Designed specifically for modern multi-color paints. Shpg. wt., 4 oz.

HD-675..... Net 2.10

**AIR TOOLS KIT:** For inflation and dusting. Includes chuck for all tires—attachment for footballs, volleyballs, basketballs, etc. Rubber toys, pools, air mattresses. Plus "dusting" attachment. Shpg. wt., 4 oz.

HD-676..... Net 1.70

**THOR SPEEDWAY "20" 1/4" DRILL**

**11.33**

Musky—Low cost 1/4" geared chuck drill rated at a full 2.5 amps. Preferred and used by professional mechanics for many years. Built for continuous production on wood or metal. Powerful, UL approved, universal motor. 1/2" capacity in steel, 3/8" in hardwood. Ball and self lubricating bronze bearings throughout. No load speed 2400 RPM. Strong, lightweight, cast aluminum alloy housing. Specially designed gear chain for greatest torque. Locking Trigger switch. Backed by Lafayette's famous Money Back Guarantee. Shpg. wt., 5 1/2 lbs.

THOR SPEEDWAY "20"—List 18.95..... Net 11.33

**NEW MODEL 4100 VERSAMATIC**

**11.25**

- WITH YANKEE STYLE BIT HOLDER
- TURNS 1/4" DRILL INTO HIGH POWER TOOL
- REVERSES—INCREASES POWER—REDUCES SPEED

Seven to one speed reduction develops tremendous torque! Hand clutch control for easy, instant stop-start action! Look at these fabulous features! Power screw driver—handles largest screws—reverses to extract them! Power drill tapping head! Plenty of power for oversized drilling! Perfect for concrete or any kind of masonry drilling! Low speed and high power for hole saw attachment! A professional tool that anyone can use! Comes complete with screwdriver bit—Phillips bit—1/4" socket set adapter—wrench pin and instruction book. Shpg. wt., 5 lbs.

HD-195..... LIST 14.95..... Net 11.25

**1/2" CHUCK FOR VERSAMATIC**

Geared chuck—5/64" to 1/2" capacity—#33 taper to fit Supreme Versamatic. Shpg. wt., 1/2 lb.

HD-268..... Net 7.38

**THOR-SPEEDWAY SPEEDSAW**

- RATED 3.1 AMPS
- 3400 STROKES PER MIN
- TILTS TO 45°

**16.63**

The most exciting tool on the market today! It replaces the hand saw for all types of sawing and takes all the hard work out of the job. Will cut wood, metal, composition, cuts straight and true and will cut bevel angles to 45° either side of the cutting line. Being a small blade, the saw can cut curves, circles, scrolls easily. Can be used for long panel cuts, ripping, cross cutting, cutting. Will cut wood up to 2" thick and steel 1/2" thick. Its motor is meant for a lifetime—has oilite bearings, through slide switch, UL approved. Comes with 2 jig saw blades (wood and metal) and wrench. 6'2" conductor cord. Measures 6 1/2" L x 6 1/2" H. Shpg. wt., 5 lbs.

THOR SPEEDWAY "17"—List 29.95..... Net 16.63

Converts Thor 17 to stationary saber saw. Metal gauge for left or right hand 45° angles. Jig saw tilts for compound angles. Rip guide permits 6 1/2" wide cut from blade to guide. Shpg. wt., 11 lbs.

THOR Speedway 17246..... Net 10.20

Special combination offer—Thor 17 Saw and 17246 Table HD-438..... Net 24.95

**Universal Saber Saw Blades:** Kit of 5 blades. Coarse-medium—medium-fine—fine—and metal cutting. Fit better than 90% of all saber saws, such as Thor, Wen, Forsberg, Ram, Shapmole, Black and Dasher, Craftman, Skill, etc. High quality steel. Precision ground, filed and set. Shpg. wt., 3 oz.

HD-439..... Net 1.47

**"VILLAGE BLACKSMITH" ANVIL**

Here is workbench equipment long wanted—a rugged farm-and-home size anvil. 8" long, 3 1/2" high and 3" wide at the base. Finds hundreds of uses in metal work, woodwork, leatherwork, etc. Exclusively built for the home craftsman, hobbyists and farmers. Shpg. wt., 8 lbs.

HD-404..... Net 3.29

**Weller 8100B SOLDERING GUN**

- 100 Watts • Heats in 5 seconds
- Prefocused dual spotlights

New soldering gun rated at 100 watts. Features instant heating in 5 seconds. Trigger switch for fast on and off control. Also dual spot lights, pre-focused to assist your solder work. Tips are long life and easily replaceable. Shpg. wt., 4 lbs.

MODEL 8100B—List 6.44..... Net 4.73. Lots of 3, Ea., 4.42. Lots of 12, Ea., 4.20

**NEW! Weller Dual Heat Soldering Kit**

Instant switching to high or low heat. Saves time—longer tip life. Instant heating clear to the tip. Prefocused spotlight illuminates work. Guaranteed for one year. Kit includes dual heat, 90-125 watts soldering gun—solder—wire brush—soldering aid. U.L. approved. 110-120-V. AC only. Shpg. wt., 3 lbs.

Weller 8200K List 7.95..... Net 5.83



**1:79 NEW!**

**30 watt INDUSTRIAL SOLDERING PENCIL**

- BUILT FOR CONTINUOUS DUTY
- LIGHTWEIGHT—A MERE 2 OZS.
- PERFECTLY BALANCED—NO FATIGUE!
- EXCEPTIONALLY COOL RUNNING!

Designed specifically for industrial use. Maximum wattage in the lightest-smallest-coolest 30 watt iron available. Nine inches long—weighing a mere 2 ozs. Less cord—far reaching easily into "parts-packed" chassis. Far cooler in operation than any other 30 watt pencil type iron. Especially suited for precision electronic wiring, small metal parts, jewelry, lights, electrical work, toys, etc.

high quality nichrome wire, precision wound on a "double" mica base. Highly stable heating characteristics assure long life and safety in use on precision circuitry. Replaceable, screw-in, nickel plated copper tip. 110-120 v AC/DC. Shpg. wt., 8 ozs.

HD-475..... Net 1.79  
HD-476 Replacement Tip..... Net .20

**NEW! WEN 'SOUPED UP' SABRE SAW MODEL 909**

- HEAVY DUTY—full 6 Amp.
- 1/2 H.P. Motor—1" Stroke
- LARGEST CUTTING CAPACITY
- 6" 90° Cut • 4" 45° Cut

LIST PRICE 44.95

**ONLY 29.97**



Bigger—more powerful—more versatile—faster cutting! Super-long blade easily cuts through 6" x 6" lumber. Cuts 4" x 4" at a 45° angle! Power enough to cut steel plate up to 1/2" thick—iron pipe up to 2" in diameter. Comfortable—conventional saw grip with auxiliary knob for 2 hand control. Saw tilts 45°—sole plate always remains flat. Finger control trigger-switch. Constant air stream flows dust from line of cut. 3400 RPM strokes per min. Includes seven blades for cutting wood—steel—hardboard—sheet metal—pipe—leather—rubber—formica—etc. Equipped with rip guide and circle cutter guide. 8 ft. 3 cord cord and adapter. 110 watts. 6 amp., AC-DC. 8 1/2" x 7 1/2" W x 7 1/2" H. Shpg. wt., 8 1/2 lbs.

HD-466 List 44.95..... 2.00 Down..... Net 29.97

Extra Blades for WEN 909: Set of seven replacement blades. Shpg. wt., 1/2 lb. Net 3.30

WEN 900 List 3.40..... Net 2.33

**THOR SPEEDWAY "14" SANDER**

Here's Our Hot Sander Special



- PROFESSIONAL PERFORMANCE!
- MOTOR DRIVEN—3450 RPM!
- SANDS—SMOOTHS—BUFFS—POLISHES—RUBS!
- USE SHEET OR FREE (WET) ADHESIVES!

Get this new top quality sander for all sanding uses. Here's an orbital motion, motor driven finishing sander (no load speed... 3450 RPM) that sands, smooths, buffs, polishes, or rubs with both sheet abrasives or wet (free) abrasives. Sanding area—4 1/2" x 5 1/2". Features all sealed ball bearings; direct-connected air-cooled motor. Rugged blue hammerhead cast aluminum body. Handy switch prevents accidental starting. UL approved. Use an 110-120V 60 cycle AC only. Shpg. wt., 7 lbs.

THOR 14..... Net 14.67  
THOR 3509—Lambwool polishing pad..... Net .70  
THOR S-106—18 sheets assorted sandpaper..... Net .88

**ADEL Hand "Nibbling" Tool**

- Cuts any shape or opening by hand
- In sheet steel up to 18 gauge — in soft metals up to 1/16" thick.

Easily operated hand "Nibbler" cuts any shape hole in sheet steel—aluminum—copper—or plastic. Metal remains flat and straight after cutting. Does not add strain or distortion to edges. Cuts holes in pre-formed sheet metal (air-ducts, chassis, etc.) without distorting original form. Cuts in all directions. Any design—angle—radius.

Follows scribe lines easily. Best possible tool for cutting template and model parts from thin metal. Shpg. wt., 8 ozs.

HD-436..... Net 1 to 11, 3.85 12 to 71..... 3.60  
HD-437 Replacement part for above..... Net 1.67

**STOR-A-DOR SHELVES**


- 40" high—20" wide—3 1/2" deep
- All Aluminum—6 shelves
- Back of door—or any place

**5.95**

Add storage space anywhere. Designed for back-of-door, out of sight, storage. Hangs easily on peg board—walls—doors—in closets. All aluminum—each shelf is 20" wide and 3 1/2" deep. Each has a guard rail. Perfect for bottles—jars—cans—boxes—medicine—accessories. Bright finish—can be painted to match any decor. Shpg. wt., 3 lbs. 12 ozs.

ML-211..... Net 5.95

**POWER DRILL ACCESSORIES**

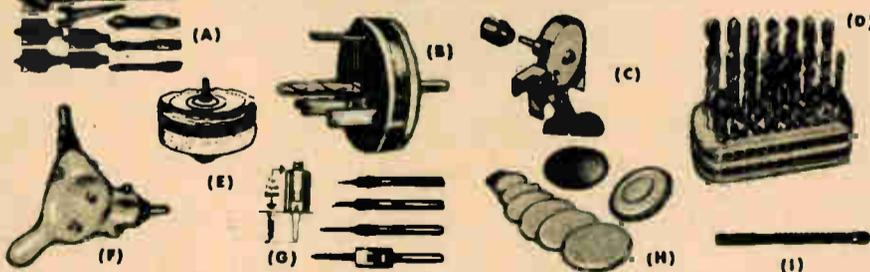

(A) 10 pc. Power Boring Set: For 1/4" electric drill or drill press. 8 different bits plus shank and wrench. Sizes 1/8", 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 1" and 1 1/4". Fast, clean bore at any angle. Shpg. wt., 1 lb.

HD-181..... 1.99

(D) 29 pc. Drill Set: 29 chrome vanadium twist drills with indexed metal stand. Sizes 1/16" to 1/2" by 64ths. Shpg. wt., 4 lbs.

HD-214..... Net 5.40

Turned down shanks: Same as above, but with shanks turned down for 1/4" drill.

HD-440..... Net 7.29

(G) Wood screw Countersunk set: 24 screw size and countersink combinations. Fits all drills and drill presses. Automatic stop for 3 depths. Bore for 8 most popular screw sizes from #6 x 3/8" to #12 x 1 1/2". Shpg. wt., 1/2 lb.

HD-337..... Net 1.27

(B) Adjustable Hole Saw: For 1/4" electric drill or drill press. Drills any diameter from 1 1/8" to 2 1/2". Max. depths of cut 1 1/2". Dial indicator sets hole size without removal from chuck. Shpg. wt., 1 1/2 lbs.

HD-257..... List 6.95..... Net 5.11

(E) 4 pc. Utility Kit: Grinds, polishes, sharpens, cleans, finishes. Kit contains 3" grinding wheel 1/2" thick, 3" double thick muslin buff, 3" wire wheel. Flanged arbor with 1/4" shank. All wheels have 1/2" bore. Shpg. wt., 1 lb.

HD-392..... Net .99

(H) SANDING AND POLISHING KIT: Handy sanding and polishing kit for use with drill or drill press. Kit contains flexible rubber 5" backing disc, 7 assorted sanding discs, 6" lamb's wool polishing bonnet. Shpg. wt., 1 lb.

HD-270..... Net 1.43

(C) Drill Mate Sharpener: Sharpens drills from 1-1/16" to 1 1/4" size. 1/4" shaft fits any electric drill. Use it also to sharpen chisels, knives, scissors, wood bits, etc. Drill holder is factory preset. Adjustable tool rest. High grade, aluminum oxide-stone grinding wheel. Shpg. wt., 1 lb.

HD-243..... Net 2.21

(F) Right Angle Drive: Halves or doubles drill speed. Close coupled right angle drive. Fits 1/2" chuck or may be screwed to drill spindle. Includes 1/4" — 24 male and female adapters—and 1/4" shaft adapter. Shpg. wt., 1 lb.

HD-269..... Net 3.30

(I) Hi Speed Cope Saw Drill Bit: Drills, saws, cuts, reams. Use in any power drill or drill press. Cuts any shaped hole. Cuts wood, plastic, steel, brass, etc. Shpg. wt., 3 ozs.

HD-75 Wood bit..... .69  
HD-74 Metal and all purpose..... .85

**NEW HOPPY TRANSIT**

**4.86**

Accurate level and incline measure • One Man Can Do Any Levelling Job • A tool of a Thousand Uses. It measures incline down to the thinness of a dime of 25 ft. It shows how much correction is needed. Simple to operate; just 3 easy steps. Employs split image principle for micro-accurate indications. Now one man can do any levelling job. Use it for yard laying, table levelling, surveying, terracing, carpentry, yard grading, contour plowing and thousand other uses. Truly a handy and useful instrument for every complete brick mason and handyman. Shpg. wt., 6 lbs.

HD-417—List 6.95..... Net 4.86  
In Lots of 6..... Each 4.63  
HD-441 Carrying Case for Hoppy Transit..... Net 3.20

**SALE! 4 CUP ELECTRIC PERCOLATOR**

**3.49**

- Best Buy! • Saves Dollars!
- Heavy Chrome Plated!

The lowest priced electric coffee maker. Brews 4 to 6 cups. All aluminum—black trim, "Super-cool" black plastic handle. Glass "perk" knob. Boils water for "instant" coffee. Perfect for home or office—a "coffeebreak" natural. Complete with cord and plug. For 110-120 V 500 watts.

AP-39..... Net 3.49

**FILE RASP**

FILES TWICE AS FAST!

Works twice as fast as old fashioned files. Cuts on forward and back strokes. Even sideways or circular motions. Excellent for shaping—maching—finishing—and fast stock removal. For use on wood, plastic, composition, glass, plaster, porcelain, etc. Two abrasive surfaces—one side coarse (46) grit—other side medium (80) grit. Resists loading—cleans easily with solvent, hot water or wire brush. 14 inches long—flat face. Shpg. wt. 1/2 lb.

HD-673..... Net 1.10

**ELECTRIC HANDI-SPRAYER**

Save time and money! 80 lb. nozzle pressure gives professional results. Sprays all types of paints, enamels and lacquers. Any sprayable liquid! Exclusive swivel nozzle permits spraying up, down, or sideways without tilting jar. Instant spray control—fingertip adjustment from mist to cone or straight stream! High Impact plastic housing—all parts of stainless steel and brass. Complete with 16 oz. Mason Jar and 8 ft. cord. Shpg. wt., 4 lbs.

HD-73..... Net, ea. 6.25 Lots of 3, ea. 5.97

**VERSA-VISE**

- TURN TO ANY POSITION
- USEFUL AS AN EXTRA ARM

**10.49**

VERSA-VISE All the features of a regular vise—plus—locks in any position, just tighten jaws. Turns to any work position. Use standing or laid flat—turns 360° either way. Larger jaw surfaces—3 1/2" x 2 1/2"—plus removable pipe jaws. Jaws open 5".

HD-282 Shpg. Wt., 17 lbs. Net 10.49  
Right Angle Adapter: Adds bench attachment for holding work at any angle. Shpg. Wt., 2 1/2 lbs. Net 2.18  
HD-283

**NEW Swingline #101 Stapler Gun 3.99**

with 1,000 Staples

- High Compression Model
- Staples within 1/16" of corner
- 100% Jam Proof
- Open Channel Loading

Revolutionary, new staple gun with tremendous, pile driving action. Delivers as much driving power as machines twice its size and weight. Highly maneuverable—perfectly balanced—extremely lightweight. All case hardened steel construction. Rust proof, banded finish. No oiling required at any time. Uses two staples sizes—4/16" and 5/16"—with no mechanical changes. Shpg. wt., 1 1/2 lbs.

HD-322 List \$4.95..... Net \$3.99  
HD-323 Pkg 1000 4/16" staples..... Net .40  
HD-324 Pkg 1000 5/16" staples..... Net .40

**THOR SPEEDWAY 1/2" DRILL**

- FULL 6.5 AMP POWER RATING
- TWO-POSITION REAR HANDLE
- HEAVY DUTY SEALED THRUST BALL BEARING ON SPINDLE

This high power 1/2" Drill in the low priced field is built to professional standards throughout. Features safety switch with push button lock and removable top handle. The rear grip handle can be revolved to vertical or horizontal position. It can also be removed for close quarter work! Specifications: 1/2" capacity in steel; 1" capacity in wood; 6.5 amp rating; 400 r.p.m. full load speed; 1 1/2" spindle offset. For 115V, AC/DC. Complete with 10 feet 3-wire, type SJ, UL approved lead cord; and 3-jaw geared chuck with key. Overall length with rear handle is 14 1/2".

THOR NO. 40..... 5.00 Down..... Net 24.95

# Lafayette's 39th Annual Winter Tool Sale

## Breaking Records for Savings

### FLEXIBLE SHAFT ATTACHMENT FOR ELECTRIC DRILLS

- DRILL WHEREVER YOU WILL
- TAKES UP TO 1/8" SIZE DRILLS

# 2.39

Operates off any fixed or portable 1/4" power drill; enables you to drill at any angle anywhere. Capacity up to 1/8" size drills; 36" overall length, with chuck. Comes in box with complete instructions. Shpg. wt., 1 lb. **HD-389** Net 2.39

### "EVER-LEVEL"

- MEASURES PITCH IN DEGREES.
- MEASURES INCH RISE PER FOOT.
- FLOATING POINTER FOR HAIRLINE ACCURACY.

The first new leveling device in over one hundred years. Floating pointer gives true level or inclination at a glance. Only 2" square by 1" thick. Milled case of specially selected plastic. Pointer bob floats in oil. Reads any angle instantly. Case design allows leveling from top-bottom-or sides. Nothing to break or get out of order. Levels any job—large or small. Shpg. Wt., 4 ozs. **HD-185** Net .98

### RECHARGEABLE FLASHLIGHT

- NEEDS NO BATTERY
- ATTRACTIVE & DURABLE
- EASY FLIP-ON SWITCH

This small light weight flashlight fits easily into the palm of your hand. Two-tone (orange and white) color makes an attractive appearance. New concave glass top spreads out light. This unit can be used in many household applications. Ideal for use in the car. The detachable end covers a pair of male plugs by which the flashlight can be recharged. This feature allows the unit to be used for benchwork or where single light source is required in dark surrounding. Smooth flip-on switch permits easy action. Complete with one replaceable lightbulb. Measures 4 1/2" in length and 1 1/4" diameter. Shpg. wt., 4 ozs. **P-435** Net 2.95

### NEW CHASSIS PUNCH SET

- EASY-SMOOTH-HOLES IN SHEET METAL
- 5 SIZES: 1/2", 3/8", 3/4", 1", 1 1/8"

# 5.49

Five most often needed round hole punches. Do the job in minutes—save hours of tedious hand labor. Cuts smooth accurate holes for sockets—plugs—controls—panel lights—switches—terminals—plug—radio parts. Works equally well with sheet metal—sheet plastics—composition board etc. Drive with any wrench—or with T handle included. Punch sizes included are 1/2", 3/8", 3/4", 1" and 1 1/8". Supplied complete with punches, dies, T drive handle, tapered reamer, fitted wooden case and instructions. Shpg. wt., 2 1/2 lbs. **HD-471** Net ea., 5.49, Net ea., in lots of 3 4.94

### NEW! SQUARE PUNCH SET

- 3 NEEDED SIZES—1/2" — 5/8" — 1"
- SMOOTH, ACCURATE, EASY TO USE.

# 6.95

Save time—save effort—cutting square holes in chassis—panels—sheet metal up to 1/8". Most often needed sizes for square chassis components. Multiple cuts allow any size square hole. Drive punches with any wrench or with T drive handle included. Cuts smooth, accurate square holes in metal—bakeplate—plastic—composition board etc. Complete with 1/2", 5/8", 1" punches—dies—drive screw, T handle and wooden case. Shpg. wt., 2 lbs. **HD-480** Net 6.95

### JACOBS TYPE DRILL CHUCK

Comparable to Jacobs 18. Key type geared tooth chuck. Capacity 0-1/4", thread 3/8" x 24". Ruggedly constructed. Polished finish. Used on standard equipment on most electric drills. Made to rigid specifications. Compare our really low price. You'll find this same chuck selling for twice as much! Shpg. wt., 1 lb. **HD-184** Net 2.98

### TUBING CUTTER

A quality cutter for copper, brass, or aluminum tubing. Provides up to 1" capacity. Equipped with alloy steel cutting wheel and slide-lock reamer. Ideal for light plumbing etc. Shpg. wt., 8 ozs. **HD-344** Net 1.20

### NEW! Knicknack CABINET

- 18 Drawers—each one 5 3/4" x 2 1/4" x 1 1/4"

COMPARABLE VALUE 6.98

Perfect storage for articles up to 6" long! Holds thread, pins, bolts, screws, nails, stamps, jewelry, cosmetics, fishing lures—hundreds of other items used in home, office or shop. Crystal clear transparent plastic drawers for "quick picking," cannot spill, yet instantly removable to carry to work area. Heavily molded of shatter-proof plastic maximum strength. Smooth sliding ribs molded into bottom assure easy opening and extra rigidity. Removable dividers make one drawer into three compartments. Welded steel cabinet stands, stacks or hangs on wall. Includes index labels, crosswise dividers. Cabinet measures 9" H x 10" W x 6" D. Shpg. wt. 8 lbs. **MC-32** Net 3.49

### Vinyl Insulated "PROFESSIONAL" Pliers

- 10 Kilovolt insulation
- Chrome Plated
- Tested Beyond Professional Specifications

# 1.29

Professional quality—heavy duty—forged from special heat treated, alloy steel. Chrome plated to resist rust. Insulated with fitted, vinyl, non-slit handle grips—protects up to 10,000 volts. Hand honed cutting edges. Machine milled teeth. Handled shaped for easy grip and maximum leverage. Short fulcrum distance for greater gripping power. Unconditionally guaranteed by Lafayette. Average Shpg. wt., 10 ozs.

HD-350 6" Diagonal cutter-wire stripper  
 HD-351 6" Long nose-side cutter-wire stripper  
 HD-352 6" Electronic oblique cutter-wire stripper  
 HD-353 6" Long chain nose-side cutter-gripper  
 HD-354 7" Linesman's side cutters-beveled nose

### 7 in 1 HOLE SAW

Fits any electric drill, drill press, motor arbor, rotary sander or lathe. Cylindrical saw blades cut holes from 1" to 2 1/2" diameter in any 3/4" stock. Male sizes are 1", 1 1/2", 1 3/4", 1 7/8", 2", 2 1/4", 2 1/2". True size carbon steel saw blades fit into deep machined grooves in tool head and are locked into place by a full length lock screw. Cuts wood, plastics, metals, sheet-rock, wall-board, masonite, formica, etc. Has guide bit and automatic slug ejector. Shipping wt., 1 1/2 lbs. **HD-225** Net 1.69

### NEW! RAM HI-TORQUE 1/4" DRILL

- Full 2.9 amperes
- Multiple Thrust ball bearings
- 1/4" Geared Chuck and Key

# 13.95

Powerful, cool-running drill for all medium-duty applications. Uses a heavy-duty universal type series wound motor for extra efficient performance. Motor works well on both AC and DC, 110-120 volts, permitting operation almost everywhere. Multiple heavy duty thrust ball bearings are used for smooth running even with large loads. Drill has a no-load speed of 2000 R.P.M., full load speed of 1200 R.P.M. Uses trigger-type on-off switch with locking pin for continuous operation, and automatic release feature. 1/2" capacity in hardwood, 3/4" in steel. Uses an extra rugged geared Jacobs chuck with 1/4" jaw. With 6 foot, 2 conductor UL approved cord. Overall length 9" Shpg. wt., 5 lbs. **HD-365** List 23.50 Net 13.95

### SCREW-MATIC 3.97

- SCREWDRIVER ATTACHMENT FOR ELECTRIC DRILLS

Can be fitted to any fixed or portable drill, to drive up to 1/4" diameter wood screws quickly and easily. Bit idles until pressure is applied, powerful "non-slip" industrial-type clutch disengages itself when screw is driven home. Special bit holder prevents bit from slipping out of screw slot. Includes two hardened tool steel 1/4" hex bits for No. 2 Phillips head and for No. 6 to No. 14 slotted screws. Shpg. wt., 1 1/2 lbs. **HD-463** Net 3.97

### ARCO JIG SAW 6.63

Cuts perfect circles any size up to 20" diameter, rips accurate widths any size up to 10" wide. An especially desirable home workshop tool because of its versatility. Does work of jig, keyhole, coping, rip, crosscut, band and hacksaw for intricate patterns, the Jig Saw is simply guided over the cutting line while the Automatic Air-Blower blows sawdust away from blade. Cuts plywood, plastics, wallboard, metals—even lumber up to 2 x 4's! Starts inside holes without boring. Has Right Angle Drive, strong Safety-Yoke and Warm Drive Clamp. Self-lubricating Lifetime Bearings. Blades are easily changed in seconds with ordinary screwdriver. Shpg. wt., 3 lbs. **HD-56** Net 6.63

Same as above—with circle cutter and rip guide. **HD-196** Shpg. wt., 4 lbs. Net 7.30

Replacement Blades—Package of 6 Astid. **HD-57** Net 1.30

### WOODWORKERS VISE (C)

- 6 1/2" x 3 1/2" JAWS
- OPENS TO 4 1/2"

A fine, practical tool for the small shop-home-form or garage. Guides are of finely machined cold rolled steel. Gray iron jaws—face ground and finished. 3/8" diameter screw—6 thread per inch. Shpg. wt., 6 lbs. **HD-182** Net 1.99

### 13 PC. TWIST DRILL SET 1.29

Set of 13 high quality chrome vanadium twist drills, complete with metal indsg. Sizes: 1/16" to 1/4" by 64ths. Shpg. wt., 8 ozs. **HD-113** Net 1.29

### ROTARY RASP 1.66

For use with any 1/4" electric drill or drill press. Made of hardened steel, it is ideal for shaping of wood, plastic, fibre etc.—planing of floors and boards—mixing of paints, oils and other heavy liquids. Extremely handy for the home craftsman, hobbyist, handyman etc. 2 1/4" in diameter. 13/16" wide. Shpg. wt., 1/2 lb. **HD-458** Net 1.66

### BENCH AND WOODWORK VISES

Sturdy, practical and efficiently constructed. 2 1/2" wide jaws—open to a maximum 2 1/4". Twin guide rods and precision drive screw assure smooth action—rigid grip. Jaws accurately machined, polished and lacquered. Unscaled for ordinary jobs in shop, home or garage. Shpg. wt., 3 1/2 lbs. **HD-107** Net 1.99

### NEW BENCH VISE (B)

Sturdy, practical and efficient. Twin 5/16" guide bars assure vernier smooth action. A large "T" free action tightening bar is connected to drive screw. Set screw on vise permits removal of drive screw from vise body. Knurled tightening knob on clamp permits speedy clamping of vise. Screw parts are nickel plated, vise body is finished in baked enamel. Jaws are 1 1/2" wide and open to a maximum 1 1/2". Shpg. wt., 3 1/2 lbs. **HD-356** Net each 1.10

### VINYL PLASTIC ELECTRICAL TAPE

- GUARANTEED FIRST GRADE 54¢
- 60 FT. x 3/4" in lots of 24
- .008 in. THICK
- 10,900 V. BREAKDOWN

First quality, pressure sensitive polyvinyl chloride tape. Extremely high dielectric strength of 10,900V breakdown. Insulation resistance of one million megohms. Over 150% elongation at break. Excellent resistance against acids, alkalis, oils, salt water, etc. Tensile strength of 15 lbs. per in. High conformability. Forms tight, smooth protective wrap. Shpg. wt., 6 ozs. **HD-216** Plastic electrical tape, 70¢ per roll, in lots of 6, 60¢ per roll, in lots of 24, 54¢ per roll.

### LOCKING PLI-RENCH 1.20

Super power locking combination pliers, wrench, clamp and vise. Exerts over 1,000 lbs. of pressure. Heat treated, drop forged jaws. Machine milled teeth. Length 10". Shpg. wt., 1 lb. **HD-126** Net 1.20

### "Little Smith" Anvil .98

"Little Smith" is the perfect companion for the hobbyist-linker-model maker-or just plain faalin' arounder. Measures only 4 1/2" x 2 1/2" x 2 1/2" overall. Rugged enough for heavy pounding-sized right for home or hobby. Makes a perfect paper weight for the craftsman's bench or desk. Shpg. wt., 2 lbs. **HD-460** Net .98

### TWINWELD EPOXY ADHESIVE

- Attach Anything to Anything-Anywhere
- Steel-hard permanent repairs in minutes
- Won't shrink—can't expand
- Can be shaped—cast—drilled—sawed—sanded

An advanced, flexible epoxy formulation. Engineered for permanent adhesive use for metal-wood-glass-ceramics-concrete-hard rubber-berglass-brick-and many other materials. Quick, easy, professional repairs. Mends anything. Ideal production line "filler." Can be molded to any shape—no sagging or drooping—perfect for duplicating and shape-making. Use as a "roof-holder"—as coating or filler—as a gasket—as caulking—as a dielectric. Chemically and dimensionally stable. Safe—no solvents. Non-toxic, non-allergenic. Shpg. wt., 1 lb. **HD-685** Net 1.49

### SAW DRILL .39

- Starts own hole
- Saws in any direction
- Any shape hole

Quickly and easily saws any shape hole in wood, plastic, plaster, wall board, plywood, etc. Gimlet tip starts hole—"teeth" cut quickly in any direction. Drills—roots—enlarges holes. Does the work of a drill and a keyhole saw on many jobs. Shpg. wt., 4 ozs. **HD-679** Net .39

### Ratchet Head SOCKET TOOL 2.25

Amazingly versatile! Handles carriage bolts, machine bolts, lag screws, sheet metal screws, machine screws, wood screws, cap screws—any style of head—slotted, recessed, square or hex. Operates in straight or offset position—handy for hard-to-reach places. Universal ratched head works right, left or locks—speeds and simplifies any job! Contains Shelton suregrip ratchet handle; straight hex adapter; offset hex adapter; 5 hex sockets—7/16", 3/4", 11/32", 5/16", 1/2"; 3 square sockets—7/16", 3/4", 5/16"; tool steel screwdriver bit for slotted screws; tool steel screwdriver bit for recessed head (Phillips) screws. A fine small tool set, ruggedly constructed for hard usage. Complete in durable plastic case. Shpg. wt., 1 lb. **HD-451** Net 2.25

### 20 PC. AUTO SOCKET SET 2.79

Ideal for auto or home. Contains 8 regular 12-point sockets—7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 7/8", and 15/16"; 1/2" drive hex. L handle, 1 ratchet handle, 1 screwdriver adapter; also 7 ignition sockets—1/4", 5/16", 11/32", 3/8", 7/16", 1/2", and 5/8" internal knurled socket; 1/2" drive hex. L handle. All parts are properly heat treated and nickel-plated. Mounted in red wall bracket. Shpg. wt., 3 lbs. **HD-446** Net 2.79

### 20-PIECE TAP AND DIE SET

- NATIONAL COARSE SIZES

Twenty of the most often needed taps and dies. Sizes popularly used in radio, hobby, home, shop and light industry. Contains one tap and one die in each of the following sizes: 6-32, 8-32, 10-24, 12-24, 1/4-20, 5/16-18, 3/8-16, 7/16-14, and 1/2-13. Includes die stock and adjustable tap wrench. Entire set contained in a fitted metal case. Shpg. wt., 4 lbs. **HD-252** Net 5.59

### RAM "88" 7" POWER SAW 27.95

- 1 1/4" HP MOTOR
- 8 AMPS
- 4500 RPM
- FREE SPEED
- CUTS 2 1/2" DEEP
- 7" BLADE

Top value for the home craftsman with features hitherto unheard of at this price. Newly designed model features a powerful 1 1/4 horsepower motor with self lubricating Moly Sulphite bearings. 7" blade diameter, 3/4" round arbor hole. Cuts to a depth of 2-7/16". Angle of cut can be adjusted from 0° to 45°, with depth of cut at 2 1/2" at 45°. No load motor speed 4500 R.P.M. This rugged but lightweight saw is designed for effortless one-handed operation. For 110-120 volts DC or 50-60 cycle AC. Lustrous mirror finish. Combination rip and cross-cut blade and rip-guide included. UL approved. 3 conductor cord. Shpg. wt., 15 lbs. **HD-359** Saw—List 49.98 2.00 Down Net 27.95

**SAW TABLE.** Perfect complement to the "88" Saw. Allows cutting at any angle between 45° and 90°. Complete with miter gauge and rip fence. Shpg. wt., 12 lbs. **HD-360** Saw table, List 17.50 Net 11.65

**COMBINATION OFFER.** Consists of the HD-359 saw and HD-360 saw table, at a further saving in price. **HD-364** Saw and Table ..... 2.00 Down Net 36.90

**COMBINATION BLADE** for up or crosscut work. **HD-361** Shpg. wt., 1 1/2 lbs. Net 1.69

**FLOORING CUT-OFF BLADE** for smoother crosscut than combination blade. **HD-362** Shpg. wt., 1 1/2 lbs. Net 1.69

**PLANER BLADE** will cut off, mitre, and rip smooth enough to eliminate sanding. **HD-363** Shpg. wt., 1 1/2 lbs. Net 4.13

# SAVE UP TO 75% ON LAFAYETTE RADIO PARTS

## PORCELAIN CASED TUBULAR CAPACITORS

**New**

**Greatest Condenser Value Ever Offered!**

KIT OF 100 600V W V DC		KIT OF 50 600V W V DC	
QTY	MFD	QTY	MFD
10	.001	5	.001
10	.002	5	.002
10	.005	5	.005
10	.01	5	.01
10	.02	5	.02
10	.05	5	.05
10	.1	5	.1

KIT NO. KI-52      KIT NO. KI-51  
List Value 32.00      List Value 16.00  
**4.95**                      **2.75**  
SPECIAL NET              SPECIAL NET

- TESTED AT 3 TIMES WORKING VOLTAGE
- EXCEPTIONALLY RESISTANT TO HIGH TEMPERATURES AND MOISTURE
- SURPASSES PERFORMANCE OF MOLDED PLASTIC TUBULARS

They're new, they're different, and they're better! Now, at a price far less than that of ordinary plastic molded tubulars, Lafayette brings you, for every day service work, a condenser that was designed for critical industrial applications. The case is of durable gleaming porcelain, a ceramic known for its high degree of imperviousness to moisture and resistance to heat. The capacitor is of finest quality, tested at 3 times the rated voltage with much closer capacity tolerance. It maintains its characteristics under extreme conditions of heat and humidity. Its mechanical construction is excellent, the leads are firmly attached and sealed — they won't twist or break off. We've selected the most popular values and put them up in two servicemen designed kits. Each condenser is plainly marked. Each value is mounted on separate handy strips. All are conservatively rated at 600 DC working volts. See chart for contents of each kit.

KI-51...Kit of 50 ..... 2.75  
KI-52...Kit of 100 ..... 4.95

## HEAVY DUTY 10 AMP DPDT MOTOR SWITCH

● MOLDED PHENOLIC CASE  
● METAL FACE PLATE **79¢**

Workmanship on this switch is of the best quality. Terminals are oversized, flow-free solder type which makes for neat, no-arc connections. Rated 10 Amps at 125 Volts, contacts easily take the current surges of motor starting. Size 1 1/2" x 1/2" x 1". Bushing 7/16" dia., 3/8" long, bat handle 3/4" long. Shpg. wt., 6 oz.  
SW-26 DPDT Toggle Switch      Net .79  
In lots of 10, Each .73

## MIDGET-BAKELITE KNIFE SWITCHES

Compact switches mounted on a black bakelite base with insulated knob handle of black bakelite. Plated brass contacts provide positive low-resistance connection.

**SPDT KNIFE SWITCH**  
Overall size 1 1/2" x 2 3/4". Shpg. wt., 6 oz.      Net .12 ea. — 10 for .99  
SW-23

**DPDT KNIFE SWITCH**  
Overall size 1 1/2" x 2 3/4". Shpg. wt., 4 oz.      Net .19 ea. — 10 for 1.75  
SW-24

## INSULATED ALLIGATOR CLIP

**7c**      **20 for 1.17**

Sturdy nickel-plated brass jaws with plastic insulated thumb rest and insulated barrel. Strong spring with hard bite. Solder lug connection. Overall length 2 1/2". Shpg. wt., 4 oz. Supplied in Red and Black.

MS-451—Red Alligator Clip      Net Ea. .07  
MS-452—Black Alligator Clip      20 for 1.17

## A FABULOUS BUY! GENUINE 10% and ALLEN-BRADLEY Resistor Kit

10% TOLERANCE  
1/2 Watt RMA Color Coded

**100 INSULATED PLASTIC HINGED BOX!**

QUANT.	OHMS
3	100
3	470
4	1,000
3	2,200
4	4,700
5	10,000
4	22,000
4	27,000
4	33,000
4	47,000
10	1 meg
10	15 meg
4	27 meg
10	47 meg
10	1 meg
4	2.3 meg
4	Other
20	popular values

Stock No. KI-23—Total 100 molded resistors with Transparent Plastic Case..... **NET 4.50 100 TOTAL**

**\$4.50**

**LONG SHAFT CONTROL WITH SWITCH**

VC-10, 1 Meg. } AUDIO TAPER  
VC-11, 1/2 Meg. }

Famous Brand      Each ..... .49  
Lots of 10 Each ..... .39

## LAFAYETTE METAL CASED OIL FILLED TUBULAR CAPACITORS

**New!**

- Exceptional capacitance stability
- 10% Tolerance
- High insulation resistance
- Wide temperature range

These all-filled and all impregnated paper capacitors are manufactured to high standards. Features 10% tolerance. Operates efficiently from -40°C to +100°C. Ruggedly constructed in metal case with plastic insulating outer sleeve to withstand shock, voltage surge, moisture, and other adverse operating conditions. Has low dielectric leakage, low power factor and exceptional capacitance stability. Lightweight compact, made to render long servicing life. Ideal for replacement and original applications in radio, TV and other electronic equipment. Outside foil is clearly printed. Doubly tinned copperweld type leads are firmly attached to the case. Conservatively rated at 600 WVDC. Ave. shpg. wt., 5 oz. each.

TYPE	CAP MFD	SIZE D X L	NET EACH		
			SINGLE	Lots of 10	Lots of 100
C-800	.001	9/32 x 26/32"	.09	.81	7.00
C-801	.002	9/32 x 26/32"	.09	.81	7.00
C-802	.005	9/32 x 27/32"	.09	.81	7.00
C-803	.01	9/32 x 27/32"	.10	.90	7.90
C-804	.02	10/32 x 27/32"	.11	.99	8.50
C-805	.05	13/32 x 1"	.12	1.08	9.50
C-806	.1	15/32 x 1 1/16"	.14	1.26	11.40

## HEAVY SHIELDED PHONE PLUGS AND JACKS

(A) Sturdy, heavy brass, nickel-plated phone plugs with screw terminal connections. Threaded insulated cable outlet may be removed for larger cables to pass through. Body dia. 3/8", overall length 3 3/4". Shpg. wt., 4 oz.  
MS-534 Plug      Net ea. .59      10 for 5.30

(B) Matching in-line phone jack, same construction as plug. Overall length 2".  
MS-533 Jack      Net ea. .55      10 for 4.95

**INSULATED ALLIGATOR TEST CLIPS WITH 6 FT. LEAD**

Handy for quick connections. Plated brass alligator clip with insulated handles and 6 ft. of No. 22 stranded wire attached. Clip is 1 1/2" overall.  
MS-536 Red      50 for 3.25      10 for .72  
MS-537 Black      SINGLY, EACH .08

**PHONE PLUG TO PHONO JACK ADAPTER**

Brass, nickel-plated adapter. Has standard phone jack on one end to take regular phone plug, and RCA-type phono plug on other end. Has threaded bushing with nut and washer so can be panel mounted if desired. Shpg. wt., 4 oz.  
MS-535      Net .52

**NEW!**

**Precision VERNIER DIALS**

Precision planetary drive vernier dials with approximately 8 to 1 ratio. Mounts on panel surface and has accurately centered metal inserts for 3/4" shafts. Metal dials are brushed silver finish with deeply etched and black filled engraving to provide maximum legibility even under poor lighting conditions. Reads counter-clockwise 0 to 100 in 180°. Uses tough scratch resistant for sure grip fluted molded knob and housing. Phosphor bronze and brass utilized for internal parts. Shpg. wt., 8 oz.

F-346      F-347      F-348

F-346 36MM (1 1/2") Diameter Vernier Dial, 13/16" from front to back      Net .95  
F-347 50 MM (2") Diameter Vernier Dial, 1" from front to back      Net 1.25  
F-348 70MM (2 3/4") Diameter Vernier Dial 1 1/4" from front to back      Net 1.49

**LAFAYETTE SPECIAL 2-CONDUCTOR PHONE PLUGS**

STANDARD 2-CONDUCTOR PHONE PLUGS

Phone plugs for a wide variety of applications with choice of handle sizes and materials. All sleeves fit standard 3/4" phone jacks. Solder terminals with cable clamp.

FIG. A. SLIM PHONE PLUG Smooth bakelite handle. Net .25 ea. — 10 for 2.15  
MS-453

FIG. B. BARREL PHONE PLUG Ribbed plastic barrel handle. Screw terminals. Net .24 ea. — 10 for 2.10  
MS-455

FIG. C. SHIELDED SLIM PLUG Ribbed chrome metal handle. Solder terminal with cable clamp. Net .35 ea. — 10 for 2.95  
MS-443

FIG. D. PHONE TO PHONO PLUG ADAPTER Adapts from standard phone plug to RCA type phono plug. Overall length 2 1/2" x 1/2" diam. Net .39 ea. — 10 for 3.25  
MS-444

**STANDARD PHONE JACKS FOR 3/4" PLUGS**

FIG. E. OPEN CIRCUIT JACK Standard open circuit phone jack, 3/4" bushing, 1/2" long. Complete with mounting hardware. Net .19 ea. — 10 for 1.75  
MS-441

FIG. F. CLOSED CIRCUIT JACK Same as above but closed circuit phone jack. Net .19 ea. — 10 for 1.75  
MS-454

FIG. G. OPEN CIRCUIT JACK Open circuit jack for 3 conductors. Net .29 ea. — 10 for 2.90  
MS-318

FIG. H. EXTENSION CABLE JACK Fit standard 3/4" phone plug. Screw terminals. Barrel plastic handle matches MS-455 Barrel plug. Net .22 ea. — 10 for 1.90  
MS-442

**LAFAYETTE SPECIAL 2-CONDUCTOR PHONE PLUGS**

STANDARD 2-CONDUCTOR PHONE PLUGS

Phone plugs for a wide variety of applications with choice of handle sizes and materials. All sleeves fit standard 3/4" phone jacks. Solder terminals with cable clamp.

FIG. A. SLIM PHONE PLUG Smooth bakelite handle. Net .25 ea. — 10 for 2.15  
MS-453

FIG. B. BARREL PHONE PLUG Ribbed plastic barrel handle. Screw terminals. Net .24 ea. — 10 for 2.10  
MS-455

FIG. C. SHIELDED SLIM PLUG Ribbed chrome metal handle. Solder terminal with cable clamp. Net .35 ea. — 10 for 2.95  
MS-443

FIG. D. PHONE TO PHONO PLUG ADAPTER Adapts from standard phone plug to RCA type phono plug. Overall length 2 1/2" x 1/2" diam. Net .39 ea. — 10 for 3.25  
MS-444

**SINGLE POLE SINGLE THROW TOGGLE SWITCH**

**22¢ • BALL HANDLE**

Ball handle S.P.S.T. toggle switch in molded bakelite case. Rated 3A-125 Volts. Supplied with chrome metal on-off indicator plate and two mounting nuts. Body size 1 1/2" x 1/2" x 1/2" behind panel. Bushing 7/16" diam., 7/16" long. Ball handle 1/2" long. Shpg. wt., 4 oz.  
SW-21 SPST Toggle Switch      Net .22  
In lots of 10, Each .19

## NEW! sub-miniature TRANSISTOR AUDIO TRANSFORMERS

**ONLY 79¢**

- Input, Output and Driver Transformers
- Only 1/2" x 1/2" x 1/2"

A new series of miniature transformers for transistor and experimental miniature circuits. Ideal for miniature radio receivers, amplifiers, hearing aids, etc., using standard transistors. Incorporate special heat-treated high permeability magnetic cores and treated to resist corrosion. Designed for improved frequency response with low distortion. 3" color-coded leads. Average shpg. wt., 4 oz.

TR-97 INPUT TRANSFORMER—Primary Impedance 100,000 ohms; secondary 1000 ohms; DC resistance primary 1000 ohms; secondary 100 ohms .....Net .78

TR-98 DRIVER TRANSFORMER—Primary Impedance 10,000 ohms; secondary 2000 ohms, center-tapped. DC resistance of primary 240 ohms; secondary 60 ohms, center-tapped .....Net .78

TR-99 OUTPUT TRANSFORMER—Primary Impedance 500 ohms center-tapped; secondary 3.2 ohms. Primary DC resistance 42 ohms, center-tapped; secondary 0.7 ohms .....Net .79

## LAFAYETTE SPECIAL BARGAINS

**BUDGET UNIVERSAL TEST LEAD KIT IN PLASTIC CASE**

This kit consists of color coded 4 3/4" long x 3/8" dia. red and black plastic handle pin prods with heavy duty 37" kinkless rubber leads with 5000 v breakdown insulation terminating in coded 2" long x 3/8" dia. plastic grip banana plugs. 3 sets of interchangeable terminals are included. They all slip directly on to the banana plugs. They are spade lug terminals, phone tips and red and black insulated alligator clips. These items have their own handsome and handy compartmentalized flexible plastic case which snaps shut. Shpg. wt., 1 1/2 lbs.      Net .77  
F-373

**TEST LEADS**

Standard test leads furnished with plastic prods and pin plugs which withstands chipping or breaking. Extra flexible kinkless vinyl covered 60" red and black leads. Prods are red and black. 4" long x 3/8" diameter. Supplied in pair of one red and one black. Available with either pin or banana plugs. Shpg. wt., 8 oz.

F-344 Test Leads With Banana Plugs Net .39  
F-345 Test Leads With Pin Plugs      Net .39

**Miniature PUSH BUTTON SWITCH**

**19¢**

Momentary contact push button switch ideal for all miniature applications. Single pole two circuit push-to-make type. Beryllium copper leaf contacts. Overall diameter 1/2", overall depth 11/16", protrudes 3/8" behind panel. Bushing 1/8" dia., 3/16" long. Supplied with washer and mounting nut. Shpg. wt., 3 oz.  
MS-449 Miniature Push Button Switch ..... 19

**LAFAYETTE JUMBO 5-WAY BINDING POST**

**25¢**

Accepts phone tip plug, a spade lug, a banana plug, an alligator clip and a strand of wire. Head non-removable from stand. Molded plastic construction. For panels 1/16" to 1/4" thick. In either red or black color; specify. P-37—Shpg. wt., 8 oz.      Net Ea. 25¢

**HEAVY DUTY 6 AMP DPDT SWITCH**

**32¢ A TERRIFIC BUY!**

Heavy duty bat handle toggle switch in enclosed bakelite case — ideal for hundreds of applications. Rated 250V-3 amps or 125V-6 amps. Six solder lug terminals. Comes with chrome metal on-off indicator plate and mounting nuts. Switch body 1 1/2" x 3/4" x 3/8" behind panel, including terminals. Bushing 13/32" dia., 7/16" long. Bat handle 1/2" long. Shpg. wt., 6 oz.  
SW-22 DPDT Toggle Switch      Net .32  
In lots of 10, Each .29

**HEAVY DUTY 6 AMP DPDT CENTER OFF TOGGLE SWITCH**

**LAFAYETTE SPECIAL! 49¢**

Heavy-duty double-pole double-throw for control of lighting circuits, high power p.o. horns, electrical appliances and motors. Rated at 6 amps 125 volts AC or 3 amps 250 v. AC. Metal on-off indicator plate and mounting nuts. Switch body 1-5/16" x 3/4" x 1" behind panel, including terminals. 7/16" bushing, 7/16" diam. 3/8" bat handle. Shpg. wt., 8 oz.      Net .49  
SW-19      In lots of 10, Ea. .43

**NEW! RUGGED TELEPHONE TYPE 4PDT LEVER SWITCH**

**ANOTHER LAFAYETTE BUY! 69¢ EA.**

Small 3-position lever action telephone type switch of rugged non-inductive construction, perfect for large inter-communication panels, test equipment, model railroad control panels, communications systems, etc. Has 4 sets of single-pole, double-throw positions. Chrome-plated actuating cam has 3 locking positions and stays put in each position. (Switching action is shown in accompanying schematic diagram.) Black insulated lever handle. Heavy insulated rollers at end of cam actuate switch contacts. All contacts easily demountable for making connections, if necessary. Mounts to panel with 2 screws (furnished), 15/16" mounting centers. Size 2 1/2" x 1 1/2" long behind panel, 3/8" wide, 1-5/16" high. Shpg. wt., 6 oz.  
SW-20 3-Position Telephone-Type Switch      Net. 69 Ea.  
Lots of 10, .63 Ea.

**HEAVY DUTY 10 AMP SPDT CENTER OFF TOGGLE**

Heavy silvored lugs for low-loss connections. Rated 10 amps at 125 volts. Body size 1 1/2" x 9/16" x 3/8" depth behind panel. Bushing 3/8" dia., 7/16" long. Bat handle 1/2" long. Shpg. wt., 4 oz.  
SW-27 SPDT Toggle Switch      Net .39  
In lots of 10, Each .35

# SERVICEMEN AND DEALERS! LOOK AT THESE PRICES!

LAFAYETTE COMPLETELY WIRED TEST EQUIPMENT

SENSATIONAL VALUES AT LESS THAN THE PRICE OF KITS!

## NEW! POCKET AC-DC VOM

5.45

• EXTREMELY COMPACT, MEASURES ONLY 3 7/8" x 2 1/8" x 1". WEIGHS 5 OZS. • 1,000 OHMS PER VOLT SENSITIVITY • COMPLETELY WIRED (NOT A KIT) • 1% PRECISION RESISTORS • READS 0-1000 VOLTS AC-DC 0-100KΩ, 0-150 MA

Here's the best test equipment buy in America. Lafayette's new, pocket multimeter features on unbeatable combination of small physical size, and a wide selection of useful ranges. It can be used for troubleshooting any type of electronic circuits or electrical appliances such as irons, lamps, radios, television, hi-fi equipment etc. It is also useful for testing complex electrical circuits, such as those found in automobiles, and around the ham shack. Extreme portability allows unlimited usage either at home or in the field.

1000 ohms per volt sensitivity, and 1% precision resistor components assure accurate, precise readings. Operation is extremely easy, simply plug the leads into the desired scale, and you are ready to go, no switching or adjusting required. Ranges: Volts: 0-15-150-1000 AC and DC. Ohms: 0-1000K MA; 0-150. The VOM comes completely wired and tested, and is enclosed in durable plastic case. All accessories including battery and rubber insulated, color coded, flexible test leads are supplied. Shpg. wt., 1 lb.

TE-13 AC POCKET VOM Net 5.45

## 20,000 OHM PER VOLT MULTITESTER SEMI-KIT

A New Kind of Kit

THE DIFFICULT WORK IS ALREADY DONE




• 20,000 OHMS PER VOLT DC  
• 10,000 OHMS PER VOLT AC  
• 40 MICROAMPERE 3" D'ARSONVAL METER MOVEMENT

ONLY 11.95

The semi-kit is a new concept in test equipment kits. All the important or difficult parts are already mounted. All that remains to be done is to mount and wire in a few small parts — a job so simple you'll finish before you realize it, and best of all, you'll have one of the finest high sensitivity multitesters on the market. When used in a circuit, the high input resistance on all DC and AC ranges does away with the highly inaccurate readings

common to low resistance testers which load the circuit. Ranges: DC Volts, 0-10-50-250-500-1000; AC Volts, 0-10-50-250-500-1000; DC CURRENT, 0-500 ua, 0-10-250 ma; OHMS, 0-10K-100K-1 meg; DECIBELS, -20 to +36; PLUS 0-5000 henries and 250 mmf. to .02 mfd. Block case 5 1/2" x 3 3/4" x 1 1/4". Complete with test leads, all parts, and instructions and battery. Shpg. wt. 3 lbs. TK-10 KIT Net 11.95

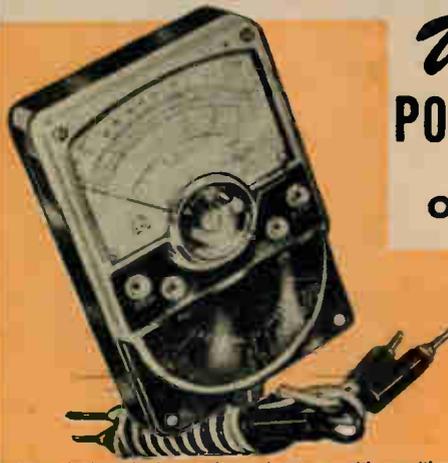

## New! MINIATURE POCKET MULTITESTER ONLY 17.50

- 20,000 Ω/v DC SENSITIVITY
- 10,000 Ω/v AC SENSITIVITY
- 1% RESISTORS
- WEIGHS ONLY 10 oz.
- 38 μA MOVEMENT
- 23 RANGES
- COMPLETELY WIRED

A terrific bargain in an all-round extra sensitive multitester. Here is the ideal all-purpose multitester for troubleshooting anything electrical or electronic — can be used for repairing automobile wiring, checking ordinary household appliances, such as irons, heaters, and motors; troubleshooting complex electronic equipment in the home, in the shop or in the field. Ideal for TV sets, home radios, high-fidelity sets, amateur gear, commercial communications equipment — wherever a truly portable unit is required. This is a completely wired precision instrument, NOT A KIT. Uses a sensitive, rugged 38 microampere basic meter, a d'Arsonval movement with jewelled bearings providing easy, accurate read-off from its large, clear scales. 2 1/2" meter face. 1% precision resistors guarantee top-notch accuracy. This unit weighs only 10 oz., measures only 4 1/2" x 2 1/8" x 1 1/2" — fits into pocket without bulging, without weighing down. The entire front is protected by a thick, clear sheet of plastic, preventing scratching


and eradicating of switch markings, protecting your meter and preserving its appearance. Single selector switch with positive detents and clearly marked positions permits one-handed operation. Recessed, break-proof zero-ohms knob permits easy adjustment, yet cannot be broken even under rough handling.

Has 23 ranges at the unusually high sensitivities of 20,000 ohms per volt DC, 10,000 ohms per volt AC. DC Volts, 0-5-25-100-500-1000; AC Volts, 0-5-25-100-500-1000; OHMS; 0-6K-600K-6 Meg-60 Meg; DC MILLIAMPERES, 0-05 (50 microamps) -5-50-500; DECIBELS, -20 to +64 in 5 ranges.

Truly a superb instrument for any application. Complete with 1.5 volt and 15 volt batteries, and vinyl insulated flexible test leads. Shpg. wt. 1 lb. AR-660 MINIATURE POCKET VOM Net 17.50

## A LAFAYETTE SPECIAL TUBE TESTER!

COMPLETELY WIRED — NOT A KIT  
• MOST ADVANCED ENGINEERING TO FIT SERVICEMAN'S NEEDS

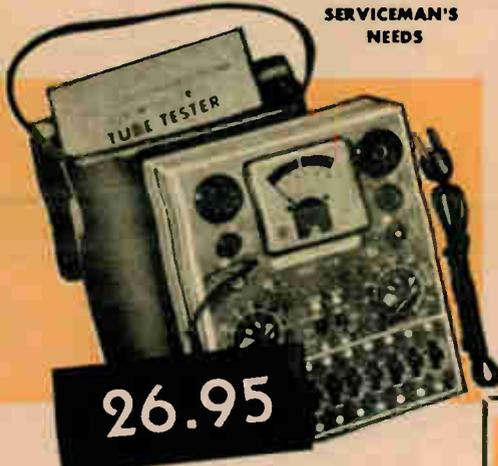

26.95

A new streamlined tube tester with a realistic approach to the problem of quickly testing the ever increasing number of tube types. It incorporates new and advanced engineering features and all at a price of about half of even the most ordinary tube tester. Read these Specifications.

"FREE POINT" ELEMENT SELECTOR SWITCHING: Newly designed, it reduces possibility of obsolescence to a minimum because any pin may be used as a filament pin and voltage applied between it and any other pin, or even the "top cap." Tubes with tapped filaments or with filaments terminating in more than 1 pin are truly tested.

MULTIPURPOSE TUBES: Special isolating circuit allow each section of multi-purpose tubes to be tested individually as if it were in a separate envelope.

SHORTS AND LEAKAGES: Supersensitive method checks shorts and leakages up to 5 megohm between any and ALL elements; continuity between various sections individually indicated.

SIMPLICITY: Fast simple operation. The 4 position fast action snap switches are all numbered in exact accord with RMA standards. Thus when testing element terminating in pin No. 7 of a tube — you use button No. 7. You can't insert a tube in the wrong socket — there's one for each type of tube base.

TUBE TYPES: Tests all octal, locat, 7 pin miniatures, 9 pin miniatures as well as the new novel and Sub-Minor types. Old type sockets used for testing obsolete types — that you rarely see anymore — have been eliminated.

SIZE: A practical size to carry with you as well as for use in the shop — only 8 1/2" x 6 1/2" x 2 1/4" deep. Shpg. Wt. 5 lbs.

MODEL TD-55 — complete with carrying case and instructions. 2.00 Down Net 26.95

## NEW! 20,000 OHMS PER VOLT MULTITESTER

20,000 OHMS PER VOLT DC  
10,000 OHMS PER VOLT AC  
40 μA MOVEMENT  
1% RESISTORS 17.95

A new high-quality, low-priced multitester. Its light weight makes it a perfect portable instrument for technicians, servicemen, etc. Rugged design withstands hard use. Features large easy-to-read meter and sensitive 40 microamp meter movement. 1% tolerance resistors provide extreme accuracy of measurements. Housed in rugged bakelite case. Single knob selector and clearly marked positions permit easy operation. Recessed zero-ohms knob adjustment provided. Features sensitivity of 20,000 ohms/volt DC, and 10,000 ohms/volt AC. Ranges—DC volts: 0-0.6, 0-6, 0-30, 0-120, 0-600, 0-1200, 0-3000, 0-6000 volts. AC volts: 0-6, 0-30, 0-120, 0-600, 0-1200 volts. Resistance: RX1, RX100, RX1K, RX10K. DC current: 0-0.06, 0-6, 0-60, 0-600 ma. Decibels: -20 to +17 (0 db - 0.774 V). Capacity: .0001-.01, .005-.20 mfd. Output ranges: 0-6, 0-30, 0-120, 0-600, 0-1200 volts. Complete with color-coded heavy duty test probes and battery. Size: 6 x 3 1/4". Shpg. Wt., 1 1/4 lbs. TE-12 Net 17.95

## EDGE-WISE PANEL METERS

- 2% FULL SCALE ACCURACY
- PRECISION D'ARSONVAL MOVEMENTS
- FRONT PANEL AREA ONLY 3 1/4" x 1"

Precision D'Arsonval meters with 2% or better full scale accuracy. Front panel dimension is 3 1/4" x 1". Overall depth is 3 1/2" behind panel including terminals. Zero adjust screw. Shpg. wt., 1/4 lbs. VU METER—Calibrated and damped in accordance with standard VU meter practice. Upper scale reads -20 to +3 VU. Lower scale reads 0-100% modulation. Accuracy to ±0.5 VU from 30-15,000 cps. TM-23 Net 5.95 0-150 AC VOLT METER—Full-wave bridge rectifier type. 1000 ohms per volt. 5 volts per division, linear scale. TM-22 Net 5.69 0-1 DC MILLIAMMETER—CALIBRATED from 0-1 ma in 0.02 ma. divisions. Black scale, red pointer. TM-21 Net 5.69

## FAMOUS RCA VOLTOHMYST IN KIT FORM

NEW!



ONLY 29.95!

49.95  
Wired

ONLY 2.00 Down

- BURNOUT-PROOF!
- 28 RANGES

- FAMED WV-77E VOLTOHMYST VTVM
- ± 3% ACCURACY ON DC
- RESPONSE ± 5% 40 CPS to 5 MC.
- DC INPUT 11 MEG.

This new kit makes possible substantial savings in a high quality vacuum-tube voltmeter. Its 28 ranges include 7 DC voltages: 0-1.5, 5, 15, 50, 150, 500, 1500, with ± 3% of full scale accuracy and input resistance of 11 megohms; 7 rms AC voltages: 0-1.5, 5, 15, 50, 150, 500, 1500, with ± 5% of full scale accuracy; 7 peak-to-peak AC voltages: 0-4, 14, 40, 140, 400, 1400, 4000 volts, with 5% accuracy; 7 overlapping ohms ranges from 0.2 ohms to 1000 megohms with center-scale values of 10, 100, 1000, 10K, 100K, 1 meg. and 10 meg. ohms. Other important features include zero-center for discriminator alignment; frequency response of 40 cps to 5 mc. flat to within ± 5% on the 1.5 to 15 volt rms and 4 to 40 volt p-p ranges; 1% deposited-carbon resistors; meter electronically protected against burnout and ohms ranges fused; cables can be stored in sleeve on handle; meter scales color coded to match range switch; shielded by metal case; and etched front-panel lettering. Tubes are 6AL5 and 12AU7. Power requirement is 5 watts at 105-125 v., 50-60 cps AC and VS035 battery. Supplied complete with DC and AC/ohms probes and cables and ground leads, battery, and instruction book. Shpg. wt., 5 1/2 lbs.

TE-141 RCA WV-77E(K) KIT 2.00 Down Net 29.95  
WV-77E Same, completely wired and factory-calibrated 2.00 Down Net 49.95  
TE-142

NEW!



## NEW! LAFAYETTE PANEL METERS

• HIGH QUALITY D'ARSONVAL MOVEMENTS • ACCURACY 2% OF FULL SCALE • BAKELITE CASES • JEWELLED BEARINGS UNUSUALLY LOW PRICED FOR SUCH EXCELLENT QUALITY. High Quality, precision-built meters with better than 2% of full scale accuracy. Screw terminals with polarity on DC Models clearly marked. Zero adjustment screw on front of panel.

### SQUARE PANEL METERS

3 1/4" square meters with overall depth of 1-11/16", including terminals. Requires 2-9/16" diameter mounting hole, 4 threaded mounting studs in corners. Shpg. wt., 1 lb.

### ILLUMINATED SCALE VU METER

CLEAR PLASTIC FRONT METER — Standard 3900 ohm "B" scale volume indicator colorated and damped in accordance with standard VU meter practice. Upper scale reads 0-100% modulation, lower scale reads -20 to +3 VU (0 VU corresponds to 100%) Accuracy to ±0.2 VU from 35-1000 cps, ±0.5 VU from 30-15,000 cps. With suddenly applied sine wave signal, meter will reach 99% of correct reading within 0.3 seconds; overshoot beyond correct reading is 1 to 1 1/2%. A root-mean-square instrument with full wave bridge rectifier. Includes built-in 6.8 volt bulb. Complete with instructions. TM-80 Net 7.50

### 0-50 DC MICROAMMETER

0-50 DC MICROAMMETER — Highly damped, sensitive movement, calibrated in 50 one-microamp linear scale divisions. Cushioned ceramic bumpers protect pointer against overtravel and damage with moderate overloads. Red pointer. TM-70 Net 7.50

### 0-1 DC MILLIAMMETER

0-1 DC MILLIAMMETER — Sensitive, quick-acting basic movement. Linear calibrations in .02 ma. divisions. Black scale, red pointer. TM-60 Net 3.95

### 0-150 AC VOLTMETER

0-150 AC VOLTMETER — Full-wave bridge rectifier type. 1000 ohms per volt. With precision carbon-film multiplier resistor. 5 volts per division, linear scale. TM-50 Net 3.95

### METER RECTIFIER

A brand new, economical meter rectifier of exceptionally linear characteristics. This full wave rectifier is specially designed as a universal replacement for all modern multi-meters, such as Lafayette's miniature V.O.M.'s. Simple to install, mounts with single screw. Long terminals facilitate easy connection. RE-22 Net .45

### MINIATURE PANEL METERS

Rugged miniature panel meters, 1.9/16" square faces, 1 1/2" deep overall. Require 1 1/2" diameter mounting hole. 4 corner mounting holes. Silvered dials and black numerals and pointer. Shpg. wt., 8 oz.

### VU METER

VU METER — Volume level indicator, calibrated in standard -20 to +3 VU and 0-100% ranges. Uses precision carbon film multiplier resistor and full wave rectifier. Damped in accordance with standard VU meter requirements. Reference level 1 mw in 600 ohm line. 10,000 ohms internal resistance. "0" VU is 1.225 volts sine wave AC across meter connected to 600 ohm source with 600 ohm load. May be used with T-pad attenuator. 0-100% scale used to indicate percent use of transmitter output. TM-10 Net 3.95

### "S" METER

"S" METER — Standard "ham" signal strength indicator. Calibrated in "S" units from 0-9, with the scale terminating in +10 and +30 db calibrations. Additional full scale calibrations of 0.5 and 0-10 in linear scale divisions. A "must" for radio amateurs for conversion of any communications receiver with AVC action to give calibrated signal strength indications. Use of "S" meter fully described in 1958 "Radio Amateur's Handbook" (Lafayette stock No. BK-1000), pages 206-207 Catalog 600. TM-11 Net 3.95

### DC MILLIAMMETERS

TM-400 0-1 DC MILLIAMPERES Net 3.75  
TM-401 0-5 DC MILLIAMPERES Net 3.75  
TM-402 0-50 DC MILLIAMPERES Net 3.75  
TM-403 0-100 DC MILLIAMPERES Net 3.75

### DC MICROAMMETERS

TM-200 0-50 DC MICROAMPERES Net 4.95

### AMMETERS

TM-510 50-0-50 DC AMPERES Net 3.95  
TM-511 0-10 DC AMPERES Net 3.95

### R. F. AMMETER

TM-500 0-5 RF AMPERES Net 3.95

### VOLTMETERS

TM-100 0-15 DC VOLTS Net 3.75  
TM-101 0-200 DC VOLTS Net 3.75  
TM-300 0-150 AC VOLTS Net 3.75  
TM-301 0-300 AC VOLTS Net 3.75

## NEW! MINIATURE FM & AM TUNING METER

• GALVANOMETER MOVEMENT • 50 μA SENSITIVITY • FRONT PANEL AREA ONLY 1/2" x 1/2"

Miniature FM and AM tuning meters can be easily installed on any tuner. The remarkable sensitivity enables you to tune in stations with surprising ease. Galvanometer movement of the indicator assures complete accuracy. Despite its miniature size, the tuning meter is ruggedly

built. Current sensitivity ±50 microamps DC. Internal resistance about 430 ohms. Insulation resistance between case and terminals: 20 megohms/500 V. Solder lugs are provided at the back. Plastic case cover. Complete with instruction sheets. Size: 1/2" x 1/2" x 1". Shpg. Wt., 4 ozs.

### FM TUNING METER

FM TUNING METER. Can be connected between radio detector and AF amplifier. The indicator will rest in the center when station is tuned in. TM-13 Net 2.95

### AM TUNING METER

AM TUNING METER. Can be connected into the second IF stage of AM or transistor radio. Graduated scale with maximum deflection of pointer indicating station being tuned in. TM-12 Net 2.95



# Lafayette IMPORTED SLIDE RULES

# ENGINEERING & DRAFTING SUPPLIES

## NEW! DELUXE LOG LOG DUPLEX DECI-TRIG SLIDE RULE

- 25 Scales with 8 Log Scales • 40" Log Log Dec. Fractions Scale • Extended Range Avoids "Going Off Scale" • Extra P Scale Simplifies Computations • Constructed of Specially Selected, Laminated, Non-Hygroscopic Bamboo • All Scales are Machine Engraved on White Plastic

This brand new 10" log log duplex trig slide rule is built for the most exacting demands and is a truly universal calculating instrument. Contains 25 scales in total. Has 8 Log Log Scales—40" Log Log Decimal fraction scale. The need for the troublesome end-for-end resetting of the slide is eliminated by the extensions of the C and D scales. Other scale arrangements also allow easier calculation of problems involving the value of trigonometric functions. The twin set of Log Log scales in four sections each runs from 1.001 to 100,000 and .999 to .00001, thereby enlarging the scale by one scale length each compared with ordinary log log slide rules. Extra features include the P scale which enables easy computations of vector problems involving two sides of a right triangle. Scales include LLO1, LLO2, LLO3, DF, CF, C1F, C1, C, D, LL3, LL2, and LL1, LLO0, L, K, A, B, S, ST, T, C, D, DI, P, and LLO. Complete with instruction book and saddle leather case. Overall length is 14". Shpg. wt., 1 1/2 lbs.

F-428 LIST 30.00

Net 15.95



LIST 30.00

15.95


F-428

## 10" LOG LOG DUPLEX TRIG SLIDE RULE

LIST 25.00

10.45

F-341

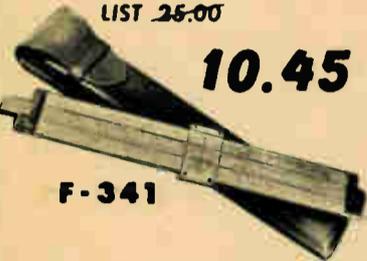

10" Log Log Slide Rule: Constructed of specially selected, laminated, non-hygroscopic bamboo. All scales are machine engraved on white plastic in permanently accurate calibrations. Adjusting screws permit varying the tension on the slide. 21 scales in all including the more frequently used C, D and CI scales on both sides of the rule. Evaluates trigonometric, algebraic and exponential coordinate and refer to D scale. Scales are L, LL1, DF, CF, C1F, C1, C, D, LL3, LL2, LLO, LLO0, A, B, K, CI, C, D, S, ST and T. Scale characteristics permit multiplication, division, proportion, inverse proportion, reciprocals, cotangents, squares, square roots, cubes, cube roots, logarithms, tangents, sines, PI factor multiplication and division, powers and roots of numbers less than 1, powers and roots of numbers greater than 1, logarithms to base "e". The most often used slide rule in all basic fields science, engineering, production and economics. Shpg. wt., 1 1/2 lbs.

F-341 LIST 25.00

Net 10.45

## 5" POCKET SLIDE RULE

F-340

LIST 6.00 2.89




5" Pocket Slide Rule: Convenient pocket sized slide rule of specially selected and treated bamboo. Will not warp, shrink or lengthen under varying atmospheric conditions. A, B, CI, C, D and K scales engraved on white plastic surface. Reverse side of slide has standard S, L and T scales. The upper, beveled edge of the rule is graduated in m/m to 13 cm. Other edge is divided into 5 inches by 32nds. Only 5-13/16" long over all. Carried easily in any pocket. Shpg. wt., 8 oz.

F-340 LIST 6.00

Net 2.89

## DIRECT VISION PRECISION SPECTROSCOPE



- 400-800 MILLIMICRON SCALE
- ADJUSTABLE SLIT WIDTH; DRAWTUBE SLIT FOCUSING
- HORIZONTALLY SPLIT FIELD

76.50



A prismatic type, hand-held instrument that has most features of the finest standard laboratory instruments. The millimicron scale is adjustable for sharp focus and for position (with "lock-in" feature to fix scale with relation to known spectral lines). Highest grade optics yields a broad dispersion field of high intensity obtained from best quality glass dispersing prisms, while excellent lens system resolves the closest spectral lines into 2 distinct lines. By a twist of the collar, a horizontally split field is obtained by which a comparison can be made of two light sources simultaneously. Tubes and collars are constructed of highly polished corrosion proof steel. Equally suited to laboratory or field work, the spectroscope has a wide array of applications: emission spectrometry of light sources; qualitative chemical analysis and metallurgical analysis by emission spectra; qualitative analysis of absorption spectra by examining aqueous or other solutions contained in the small test tubes provided. Absorption spectrum analysis has application in many branches of technology—color and dye chemistry, blood chemistry, clinical medicine, criminology. Complete with plush-lined case, shipping wt., 1 1/2 lbs.

F-361

5.00 Down

Net 76.50

## SUGAR REFRACTOMETER

- MODIFIED ABBE DESIGN
- READS % SUGAR DIRECT
- NO MOVING PARTS TO WEAR OUT
- CAN BE USED TO DETERMINE REFRACTIVE INDEX



Here is a beautifully constructed scientific tool of simple design, easy to operate, with no moving parts, except for the focusing eye piece.

Operation is very simple. A few drops of the sample are placed on the prism, the cover is closed and observation is made by means of tungsten illumination or daylight. A perfectly clear field, completely color corrected, shows a reticle graduated in percent from 0-32%. With the sample in place as described above the field will show a sharp dividing line between a bright and dark portion; where the dividing line falls determines the reading, which can be estimated to 0.1% accuracy. The instrument can be converted to a universal laboratory type by changing % readings to "index of refraction" readings. No. (Consult Chemical Handbook or literature.)

This instrument is an essential tool in the fields of sugar refining, agricultural, food technology, medicine, theoretical chemistry, etc.

Comes in a convenient portable leather case. Shipping wt., 1 1/2 lbs.

F-358 2.00 Down Net 29.50

F-431. Same as F-358, but range from 30 to 60%. 2.00 Down Net 33.95

F-430. Same as F-358, but range from 50 to 80%. 2.00 Down Net 41.90

F-432. Same as F-358, but range from 60 to 90%. 2.00 Down Net 41.90

## ILLUMINATED MAGNIFIER

- 5X MAGNIFICATION - 2" FIELD
- ONLY 2.95



A fine, fixed-focus illuminated magnifier—magnifies work 5 times. Field of vision is 2" at 1 1/4" working distance. Unlimited usage in industry—shop—hobbies. For checking tools and dies—castings—forgings—welds—etc. Inspection of meter movements—fine soldering electronic repairs. Magnified area easily accessible through cut out in handle in hobbies such as stamp or coin collecting, photography, entomology—mineralogy—etc. Excellent map reader. Completely portable—uses two No. 2 cells for power. Weight 3/4 lbs., length 8 1/2" overall. Shpg. wt., 1 1/2 lbs.

F-193 Net 2.95

## Direct Vision Spectroscope

- SIMPLEST WAY TO OBSERVE SPECTRA
- BETTER THAN ANY GRATING SCOPE OF EQUAL COST
- HIGHEST GRADE OPTICS IN DIRECT VISION FIELD



19.50


Every physics, chemistry, science class, or hobbyist can afford to own this superb instrument. It is the simplest means by which one can observe emission spectra from light sources and vaporized chemical salts, and the Solar Spectrum.

A broad dispersion field of high intensity is obtained from several dispersing prisms of matched glass, while a high grade optical system yields good resolution, sufficient to separate 5769.6A° from 5790.6A° in the spectrum of a fluorescent lamp. The slit has adjustable width and can be focused sharply by means of an eye piece draw-tube, assuring easy viewing and establishment of Fraunhofer lines of the Solar spectrum or bright lines of the emission spectra. Metal parts are made of highly polished corrosion-proof steel. Comes in plush-lined case. Shipping wt., 9 oz.

F-359

Net 19.50

## ALCOMAX MAGNETS

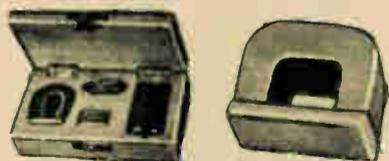

POWER MAGNET • LIFTS 50 TIMES ITS OWN WEIGHT Made of Alcomax—a material with 12 times the magnetic energy of tungsten steel. Designed for most efficient performance/weight ratio—will lift up to 50 times its own weight. Horseshoe shape with plated keeper. Ideal for such applications as magnetic clutch, lifting, work holding, elec. relays, etc. Size 1 1/8" H x 1 1/2" D x 1 3/4" W. Distance between poles is 7/8". Shpg. wt., 1/2 lb.

F-55

Net 2.40

## POCKET MAGNET

An Alnico magnet useful for inspection of hardware to sort steel from brass, as a retriever of small parts. Highly efficient. Size 1" H x 1 1/4" x 5/16" D. 1/4" between poles. Shpg. wt., 3 oz. With plated keeper.

F-54

Net .45

## LABORATORY SET

This set has been specially designed for schools, laboratories, and technicians, for testing and demonstrating the magnetic properties of permanent magnets. Fine hardware case contains a pair of bar magnets 2 1/2" x 1/2" diam., a horseshoe magnet 1 3/4" high x 1-5/16" x 1/2" deep with 5/16" spacing between poles, and a bridge magnet 7/16" high x 28/32" x 5/16" deep with 1/4" space between poles. Shpg. wt., 1 1/2 lbs.


F-58

Net 3.45

## TECHNICAL DRAFTING SET

- Center Wheel Adjustment
- Professional Quality
- German Craftsmanship
- A \$15.00 Value

5.95



A fine set of imported nickel plated brass instruments priced far below the usual price for this quality. Contains 4 1/4" self-centering compass, one leg knuckle joint with divider, pencil, pen parts and lengthening bar; 4 1/4" self-centering divider; spring bow divider 4 1/4", center wheel adjustment with interchangeable needle points; spring bow pencil and spring bow pen, both 4 1/4" with center wheel adjustment and interchangeable needle point; two 5 1/4" ruling pens; extra handle for pen and pencil parts; adjustment tool; lead case and leads; and spare parts kit. All in velvet lined snap closing case. Shpg. wt. 1 1/2 lbs.

F-68

Net 5.95

2.59

## UTILITY DRAFTING SET

- EXCEPTIONAL VALUE

Made in Germany of hard rolled, nickel plated brass. All instruments are nested in a fitted, velvet lined case. Contains three side wheel 3 3/4" bow instruments—one a divider, one a pencil and one a pen. All have reversible needle point. 5 1/4" compass with pen and pencil parts—and lengthening bar. 5 1/4" divider with straightening device. 5" ruling pen. Extra handle for use with pen and pencil parts. Capsule with extra leads. Perfect for schools, labs, industrials or wherever precision drawing sets are used.

F-13

Net 2.59

## 8" PROPORTIONAL DIVIDER

Extremely accurate finely made proportional dividers. Basic equipment for draftsmen—architects—engineers—students. Replaceable steel points—in hard, leather covered, felt lined case. Used for proportional reductions and enlargements, copying drawings in enlarged or reduced scale, dividing lines or circles into equal parts, quick solving of difficult measuring problems, finding distances on maps without scales, etc. Flat farm-replaceable steel points. Pressure setting. Graduated for lines from 3/8" to 10" — Circles from 6" to 20". Excellent, accurate utility model. Shpg. wt. 8 ozs.

F-167 Net 3.95

IMPORTED FROM GERMANY



3.95

## Professional GIANT BOW

- 6" Size with Center Wheel Adjustment
- Finely Balanced—Professional Type



2.95

Professional quality utility set in a fitted, velvet lined case. Made in Western Germany of nickel plated, hard-rolled brass. 6" giant bow has preferred center wheel adjustment. Makes circles from 1/2" to over 10" in diameter. Set includes 6" giant bow, interchangeable pen and pencil parts, extra needle for using bow as divider, handle for use with pen and pencil parts, lead, lead box and repair parts. Shpg. wt. 1 lb.

F-44

Net 2.95

## NEW "Micro-Lab" Kit

COMPLETE HOME LABORATORY ALL THE MOST NEEDED ACCESSORIES

7.79



A carefully preselected assortment of the most often used lab items for biology, botany, anatomy, zoology, microscopy, etc. Perfectly complements the many inexpensive microscopes already in use. The instruments and accessories are of professional quality. The cabinet will accommodate any microscope of no more than 8 3/4" x 5" x 3" overall (such as our F-334 "BI-OCULAR" and F-357 "Micro-Mech") and contains the following accessories: 15 slides, slide labels, slide covers, vial of balsam, dissecting scissors, probe, scalpel, tweezers, spatula, applicator rod, eyedropper, magnifier, 5 test tubes with stoppers, 6 laboratory jars, alcohol burner, polishing cloth. All in fitted drawers. Shpg. wt., 7 1/2 lbs.

F-454

Net 7.79

## GENIAC CYLINDRICAL SLIDE RULE




The GENIAC cylindrical slide rule uses a new concept in slide rule design to achieve the graduations and accuracy of a 66 inch slide rule. This rule may be used to give answers with up to 5 digit accuracy, and quickly solve problems involving multiplication, division, roots, powers, logarithms, proportions, and percentages. Cylindrical construction features all-metal construction with plastic coated spiral scales. 1 1/4" diameter and 10" long, the rule collapses to 6", small enough to be easily carried in a pocket. Almost indestructible, cannot warp. Shpg. wt., 1 lb.

F-387 GENIAC Cylindrical Slide Rule

Net 15.95

## HARD MAPLE PANTOGRAPH

- ENLARGES
- REDUCES
- REPRODUCES!
- PRECISION SUSPENDED!




3.75

21" adjustable pantograph—21 different ratios from 1 1/4" to 8. Enlarges, reduces or reproduces drawings—sketches—diagrams—pictures—maps etc. Most rapid, accurate means of reducing or enlarging to scale. Lacquered highly finished bars are 21" long and 3/4" wide. Heavy metal standard, with bearing eliminates all friction. Chrome plated hardware—ratio thumb screws and nuts. Complete with lead, accessories and detailed instructions. Shpg. wt. 2 lbs.

F-158 Net 3.75

## "draftette" DRAFTING MACHINE

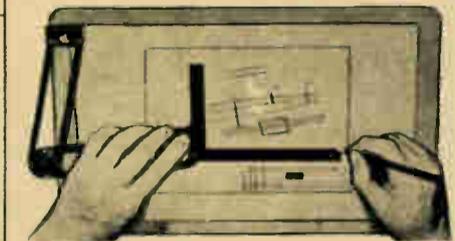

Full 180° protractor scale, finest aircraft aluminum with black satin finish. Engraved, white filled numbers and markings are machine calibrated to ± .0005 of an inch! Folds like a jackknife... slips into drawer or briefcase, eliminates clutter of T-square, ruler, protractor, triangles. Clamps to drawing board or sketch pad. Layout chassis, diagrams, sketches, design detail, surveys etc. F-287 Draftette with 3 x 5" scale, shpg. wt., 1 lb. List 4.95 Net 3.95 F-289 Draftette with 3 x 5" scale, attached to 11" x 17" drawing board. Shpg. wt., 3 lbs. List 6.50 Net 5.20 F-401 Draftette with 4 x 6" scale, List 6.95 Net 5.56 F-402 4 x 6" Draftette mounted on 11" x 17" drawing board. List 8.50 Net 6.80

## SUPER DRAWING KIT

- REGULAR 16.50

9.00



COMPARE OUR PRICE! Lafayette has designed this set with the professional draftsman and advanced student in mind. Contains all the necessary equipment for drafting mechanical drawing—designing—engineering. Sturdy accurate components. Includes 20" x 24 1/2" drawing board 24" T square, 10" 30°/60° triangle, 8" 45° triangle, french curve, 12" triangular ruler, 6" 180° protractor, 4 pencils pencil pointer, erasing shield, thumb tacks, and art gum eraser. If purchased separately these components would cost many times our low price. An unbeatable value! Shpg. wt., 10 lb.

F-180 Net 9.00

## SPECIAL COMBINATION OFFER

Consists of F-65 Technical Drafting Set and F-180 Super drawing outfit. Shpg. wt., 12 lbs. F-181 Net 13.75

## OPTICAL MICROMETER



- Pocket sized Comparator
- Direct measurement to .005"
- Measures Diameters Radii-Angles
- Linear scale in Inches

7.95

High quality optical micrometer using a triplet lens system of approximately 7 power. Triplet system affords a wide flat field of view. Extremely accurate reticle of etched glass. Unaffected by changes in temperature and humidity—impervious to oil, solvents and scratches. 0.5 inch linear scale calibrated to .005 inch. 10 mm scale, calibrated to .2 mm. Hole diameters from 1/44" to 1/16" and from .005" to .05". Thickness scales from 1/44" to 1/4". Radii from 1/44" to 3/8" and angles from 0° to 90°. Measures instantly—without adjustments. Accurate to edge of 1" field. Adjustable focus. Reticle removable for use as high power magnifier. Infinite uses in lab and industry. Complete with leather case. Shpg. wt., 6 oz.

F-376

Net 7.95

## SPECIAL MICROMETER RETICLES

Extremely accurate, etched glass reticles for use with F-376 Optical Micrometer or other comparators of equal quality. Unaffected by changes in humidity and temperature—resistant to scratching—oils—and solvents. All reticles measure 1-1/16" (27mm).

(B) Particle measuring grid 0.4" x 0.3" subdivided to .005". Hole diameters from 0.1mm to 3.0mm. Radii from 1mm to 10mm. Angles from 0° to 90°. 10mm linear scale calibrated to .2mm. Shpg. wt., 4 ozs.

F-456

Net 2.75

Radii and angle scales. 180° protractor scale, 0 to 90° in 1° increments. Radius scale, concentric 0.5mm to 10mm with .5mm subdivisions. Shpg. wt., 4 ozs.

F-457

Net 2.75

Thickness gauge. 15 scales consisting of parallel lines—measures from .002 to .016 inches. Shpg. wt., 4 ozs.

F-458

Net 2.75

Particle measuring grid and diameters. 10mm square grid of 0.5mm squares. Subdivided with 0.1mm increments. Diameters from 0.1mm to 2.5mm in 0.1mm increments. Shpg. wt., 4 ozs.

F-459

Net 2.75

Complete comparator. All five reticles and magnifier. With leather case. Shpg. wt., 8 ozs.

F-460

Net 16.95

WIND VELOCITY AND DIRECTION INDICATOR



59.95

PRODUCED BY THE SCIENCE MINDED FOR THE SCIENCE MINDED

- Direction and Velocity on One Dial
- Indicates Velocity from 0 to 100 m.p.h.
- New "Gyro" Design
- Starting Speed: 5 m.p.h.
- Accuracy for Speed  $\pm 5\%$


Registers wind velocity and direction on a single dial. Modern, compact design. Completely self contained — no outside power source is required. A precision velocity/direction system designed to fill the needs of serious weather students, pilots, colleges, broadcast stations, weather marinas, airports, farms, testing labs, drilling rigs, forestry stations, yacht clubs, motels as well as private homes and executive offices. The transmitter assembly may be mounted on a roof or any suitable elevated position. Utilizes any 1 1/4" O.D. pipe or mast. Indicating unit can be wall mounted or set on a desk, table, mantle or shelf. Bracket permits tilted mounting. The indicator is housed in a handsome wooden cabinet, 5 1/2" x 2 1/2" x 7 7/8", finished in black and gold. Highly legible dial face 4 1/2" x 3 1/2". Two scales for speed, 0 to 25 m.p.h. and 0 to 100 m.p.h. plus third scale for direction. Outdoor parts of aluminum and specially coated and treated steel for maximum corrosion resistance. Self contained battery — no drain except when reading wind direction. Simple installation — similar to TV antenna installation. New "Gyro" design for maximum stability and minimum wind loading. Complete with 60 ft. of 5 conductor, color coded cable, 1 1/2 volt battery and instructions. Shpg. wt., 15 lbs. Net 59.95 F-507WX

"WINDICATOR" Mounting Kit

- Guyless Universal Mounting Assembly

Consists of mini-tower for mounting on any peaked or flat roof or surface. 5 ft., 1 1/2" O.D. aluminum mast. Special, hardened screw-nails for rigid fastening. Self sealing, adjustable feet. Five standoff insulators. Set up height 9 ft. AM-20W Shpg. wt., 8 1/2 lbs. Net 7.17

Wire for extended runs, 5 cond., color coded. WR-121 Shpg. wt., 2 1/2 lbs. Net, per 100 ft. 4.70

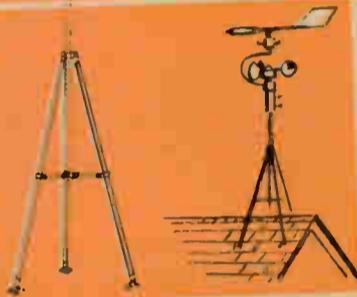

NEW! LAFAYETTE AUTOMATIC PHOTO-ELECTRIC 'LUMINATOR

- Automatic Light Switch
- Lights on at sunset—off at sunrise

6.95

New photo-electronic, light sensitive switch turns lights on and off at dusk and dawn. Better than a clock—no setting and resetting of timer. Variance in "on-off" cycle adds extra protection when away from home. You need never come home to a darkened house. The controlled lamps go on as darkness falls—stay on until sufficient day light returns or until manually turned off. Just plug it in for protection from prowlers—to turn on night lights—illuminate outdoor areas—light up brooders—green houses—displays—show windows—any place you require automatic illumination. Mounts most anywhere on rubber suction cup feet. Unobtrusive—measures only 4" x 2 1/2" x 1 1/4". Use on 117 volt AC only. Maximum 300 watts lamp load. Instructions included. Shpg. wt., 1 lb. MS-759 Net 6.95

NEW! DELUXE HOPPY-SPLIT IMAGE TRANSIT

Low Cost, Precision Level and Incline Measure

- New—Adjustable thumb screw
- New—Hi-Impact Black Butyrate Case
- New—Prism-Like Optical System
- New—Plate glass Mirrors
- New—External Sights
- New—Metal Mirror Carrier

Amazingly accurate new Hoppy Transit is not a gadget, not merely a leveling device. It is a precision instrument that will indicate level and measure a minimum of 1/8" rise or fall at 25'. The Hoppy Split Image Transit makes present day bubble and string type levels obsolete. It not only indicates level but shows exactly how much correction is needed. One man alone, using the Split Image Transit and Target can perform any leveling or incline measuring job quickly, easily, and accurately in just 3 easy steps. Makes any complicated measuring/leveling job simple. Use it for patio layout, bricklaying, flooring, surveying, terracing, fencing, plumbing, shelving, gutting, drainage, irrigation. Indispensable as a leveling and grading tool for model railway pike.




6.72

HD-690 Shpg. wt., 6 lbs. Net 6.72  
HD-441 case Shpg. wt., 1 1/2 lbs. Net 3.20

PREVIEW 8 — ACTION MOVIE VIEWER

- VIEW 8MM MOVIES ANYWHERE—ANYTIME!
- COMPLETELY PORTABLE!
- FORWARD—REVERSE—STILLS!
- BUILT IN ILLUMINATION!
- 400X AREA MAGNIFICATION!



Automatic action, 8mm, battery operated movie viewer. Renders a bright contrasting picture—(400 area magnification)—operates smoothly—has automatic drop in loading. Takes standard 50' reels—black and white and color. Built in illumination—uses 2 standard penlite batteries—simple one hand operation—smooth, quiet mechanism that will never damage film. Prism optical system, automatic rewind—can be worked forward, backward and for stills. Handsome high impact polystyrene case—self lubricating nylon gears. Compact—will fit in pocket. Less batteries. Shpg. wt., 1 lb. F-529 Net 8.59


BA-155 Batteries for above—2 required Net .10 ea.

Reg. 12.97 8.59

HUMIDICATOR- "Slide Rule" HYGROMETER

- Slide Rule Readings
- No Computing —
- No Conversion
- Exceptional Ease and Accuracy

The most recent innovation in weather instruments. Fastest—easiest method of determining relative humidity. With the cursor (slide) set on the temperature, the relating humidity is read directly off the humidity indicator graph. Does away completely with tables, charts and time consuming calculations. The "sliderule" calculator correlates wet and dry bulb readings and "calls-out" percent of relative humidity. The "Humidicator" graph is calibrated in increments of 2%. Lesser figures may be readily estimated. Both thermometers are calibrated in increments of 2° from 20° F. to 120° F. Background colors chosen for easy readability and instant reference to "Humidicator" graph. Specially treated gauge for wet thermometer has increased "wetting" capacity. Overall size, including clstern, is 13 1/2" x 3 3/4". All mounted on a mahogany board with provision for hanging. Shpg. wt., 1 lb. F-496 Net 4.95

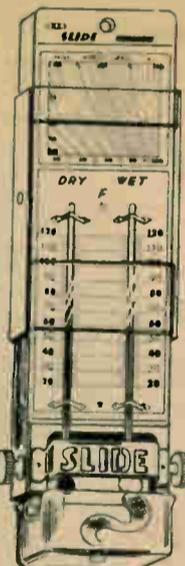

RAIN GAUGE 1.59

Farmers, gardeners, weather hobbyists. All need this sturdy, molded plastic rain gauge. precision manufactured to give accurate rainfall records. Unique "chisel" shape permits recording of minute quantities of precipitation. Exclusive easily-operated Cumulative Rainfall Indicator. The gauge has large numerals on an easy-to-read scale graduated up to 5 1/2 inches. Scales in black numerals on transparent shell with opaque instructions back for easy readability. With complete instructions for mounting and use, to obtain weather-station accuracy to 1/10th of an inch. Overall length 10 1/4", width 2 1/2". Shpg. wt., 8 oz. F-494 Net 1.59



INDOOR-OUTDOOR THERMOMETER 2.29

Tell inside and outside temperature — instantly — from the comfort of your room. Inside location — ideal for quick easy reading. Dual tubes single scale for instant, visual comparison. Plastic case with modern tapered lines 8" x 2 1/2" x 4 1/2". Long copper capillary tube and bulb. Large scale numeral for ease of reading. No moving parts to become worn. Shpg. Wt. 1 lb. F-321 Net 2.29




MAXIMUM-MINIMUM THERMOMETER 4.70

For weather enthusiasts—gardeners—farmers, etc. Gives three readings at a glance — maximum, minimum and present temperatures. Self-registering — no knobs — magnets — or push buttons needed for reset. Magnifying lens case for ease of reading. Maintains automatic check on temperature variations. Makes you the local weather expert. Shpg. wt., 1 lb. F-372 List 6.95 Net 4.70



RUGGED LEVER SWITCHES FOR AUDIO APPLICATIONS AND INTERCOMS

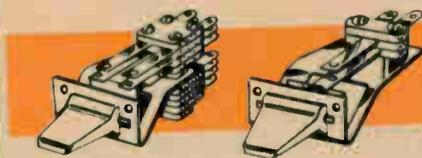

4PDT lever action switch has 4 sets of single-pole, double-throw contacts. Switch has three positions with positive and spring returns. Front panel mounting is especially suited for audio applications and intercoms. Mounts to panel with 2 screws, mounting centers 1" apart. Size 2 1/4" long behind panel, 1 3/16" wide, 1" high. Shpg. wt., 4 ozs. SW-68 4PDT Lever Switch Net .95

SPST lever action switch similar to SW-68 above. Has 2 positions with spring return. Size 1 1/4" long behind panel, 3/8" high. Shpg. wt., 4 ozs. SW-69 SPST Lever Switch Net .39

STEREO SELECTOR SWITCH

- Now have stereo in every room in your home
- Permits remote selection of any of 3 pairs of speakers



A constant impedance speaker selector switch for multiple-speaker Stereo Hi-Fi. Selects 3 sets of speakers in any combination, with up to 60 watts of audio power. Mounted on an attractive, gold-finished, steel, electric outlet plate. 2 3/4" x 4 1/2". Shpg. wt., 1 lb. MS-765 Stereo Speaker Selector Switch Net 1.79

2 INSULATED ALLIGATOR CLIPS WITH BANANA PLUGS .49

- With banana jack
- Solid copper clips




Handy for all types of connections. Accurately matching, sturdy jaws for a tight grip. Convenient thumb grip; equipped with soldering lug. Complete with banana plugs. 1 red, 1 black. Overall 4" long. Shpg. wt., 4 ozs. MS-768 2 Alligator Clips with Plugs Net .49

ADJUSTABLE CURVE 1.69

1.69

Enables anyone to draw curved designs with ease. The rule is easily bent to any desired curve with the fingers. Once bent, the rule stays curved without being held. White plastic frame encloses a lead bar and a steel sheet support. Overall length is 23 1/2". Shpg. wt., 8 oz. F-441 Net 1.69

PROFESSIONAL STYLE OIL PAINT SET

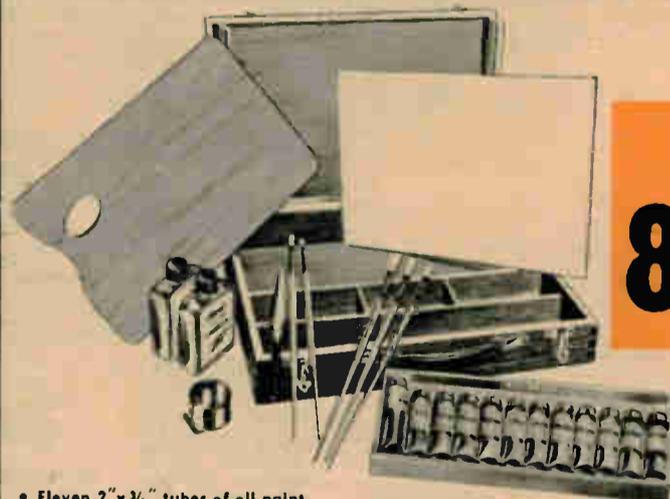

18.75 value

8.44


- Eleven 2" x 3/4" tubes of all paint
- Jumbo 3" x 1" tube of zinc white
- 5 bristle brushes
- 2 bottles linseed oil and turpentine
- steel palette knife and cup
- 12 1/4" x 9" wood paint palette
- 12" x 8 1/4" mounted canvas panel

Imported by Lafayette to give you more fun and better results... AND TO SAVE YOU MONEY. Here is an 18.75 value for only 8.44, and that's a saving of 10.31. This complete set is in a sturdy 13" x 10" wood box. Shpg. wt. 4 1/2 lbs. F-532 Oil Point Set Net 8.44

MINIATURE DYNAMIC MIKE 1.95

- Designed for transistor equipment
- Only 1-1/16" x 5/16" overall
- Perfect for "hidden" applications—Hearing Aids—Dictating Equipment—Transmitters

Specially designed for use in miniaturized equipment. Ideally suited for applications wherein size, weight and portability are important. 600 ohm impedance matches most transistor circuitry calling for dynamic microphones. Rugged — metal enclosed — to resist mechanical shock and variations in heat and humidity. Measures only 1-1/16" dia. x 5/16" thick. High sensitivity in the voice range. Frequency response 300 to 5000 cps. Output -73 db. Includes 4" flexible lead terminals. Shpg. wt., 4 ozs. PA-74 Net 1.95





Lafayette

CAMERA DIVISION

WE INVITE COMPARISON!

WE DEFY COMPETITION!!!

ALL MERCHANDISE SOLD ON A MONEY BACK GUARANTEE—YOU BE THE JUDGE.

# LAFAYETTE CAMERA DIVISION presents the 'RANGEFINDER II' SYSTEM versatility at low cost

• 5 ELEMENT F2.8 COATED LENS! • COUPLED RANGEFINDER

only **29.95** less case



- ✓ BRILLIANT COMBINED VIEW-RANGE FINDER! ✓ SINGLE STROKE RAPID FILM TRANSPORT! ✓ NINE SHUTTER SPEEDS TO 1/300! ✓ MXF SYN-ALL SPEEDS — ALL BULBS — PLUS STROBE! ✓ F2.8 45mm COATED LENS! ✓ HI-SPEED REWIND! ✓ STANDARD PC FLASH TERMINAL! ✓ DOUBLE EXPOSURE PREVENTION! ✓ BUILT-IN SELF TIMER!

Lafayette's outstanding camera value Precision-made to order for the camera fan who is a wise buyer. Check the features — then compare Lafayette's price with any other brand. Fast F2.8 coated anastigmat lens and extra-wide lens aperture for brilliant, sharper full color or black and white even in poor light. Sight and focus through combined range-view finder. Fully synchronized at all speeds for class F, M and electronic flash. Speeds from 1 sec to 1/300th. Rapid advance sets shutter, counts exposure and transports film. Built-in delayed action timer — automatic exposure counter and film stop. Hi-speed rewind with folding lever. Standard accessory shoe on top-film type indicator. All metal body with brushed chrome trim-black leatherette covering. 20 or 36 exposures on black and white or color 35mm film. PG flash terminal. Shpg. wt., 3 lbs. Use series 6 accessories.

- F-485 Less Case and Exposure Meter ..... 2.00 Down ..... Net 29.95
- F-486 Leather Eveready Case. Shpg. wt., 1/2 lb. .... Net 3.95
- F-351 Clip-on Exposure Meter Shpg. wt., 8 ozs. .... Net 5.95
- Special Combination Offer: Includes camera above—Eveready case—folding BC flash gun—and clip-on exposure meter. Shpg. wt., 4 lbs. .... 2.00 Down ..... Net 39.95

Exposure meter illustrated not included.

## NEW! "SUPER-VUE" SLIDE VIEWER

- For all 2 x 2 slides—35mm, super slides, 828
- Large Screen—3" x 3"—Viewing
- Battery Illuminated

**5.95**



Extra brilliant viewing of all 2 x 2 slides. 35mm, Bantam (828) and super-slides. Paper, metal, plastic or glass. Highly corrected 3" x 3" lens allows small group viewing. May be hand-held or placed on table. Built-in "fill" for best viewing angle. Lens system gives amazing depth to carriers provide semi automatic action. "Battery Saver" feature—lights only when slide is in viewing position. Bright—sharp images with no "cut" corners. Lightweight—sturdy—compact. Complete with 2 carriers—2 color corrected bulbs—instructions. Shpg. wt., 3 1/2 lbs.

F-497 (Less batteries) Net 5.95

BA-156 Burgess #1 (2 required) Net ea. .13

## '35' CLIP-ON EXPOSURE METER

**5.95**




- Fits camera accessory shoe
- ASA scale 6 to 3200
- Measures reflected and incident light

Exceptionally convenient exposure meter. Clips right on camera—quick easy reading. Gives better, more accurately exposed pictures with a minimum of effort. Speeds 1/1000 to 30 sec. Lens aperture f:1 to f:22. Light value scale (LVS) from 1 to 18. Cine settings from 8 to 64 frames per sec. Measures reflected and incident light. Mounts on camera or may be hand held. Complete with leather case and instructions. Shpg. wt., 1/2 lb.

F-351—Reg. 9.00 Net 5.95

## NEW! AUXILIARY LENSES

- TELEPHOTO — TWICE AS CLOSE!
- WIDE ANGLE — 75% MORE
- CLOSE UP — DOWN TO 6 1/2"

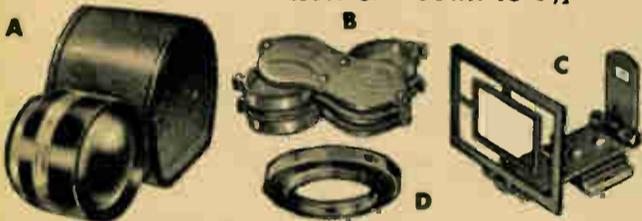

Telephoto shots — wide angle shots or extreme close ups. Easy as 1-2-3 with the new auxiliary lenses. Each lens is hard coated for maximum light transmission. Prefocused and color corrected. No increase in exposure setting is necessary. Wide angle and telephoto lenses screw into bring your subject twice as close with Telephoto — add 75% more area with the Wide-angle. Indispensable for panoramic shots. Close up lens kit consists of +1, +2, and +3 Prexar lenses—allows focussing down to 6 1/2" for amazing close-up results. All auxiliary lenses are supplied in cowhide cases. Use with any color or black and white film. The close up lenses require an adapter ring for mounting on your camera. Shpg. wt. of each auxiliary lens approx. 6 ozs.

- F-488—AUX. TELEPHOTO LENS (A) ..... Net 9.90
- F-489—AUX. WIDE ANGLE LENS (A) ..... Net 9.90
- F-294—CLOSE UP SET (B) ..... Net 8.91
- F-408—VIEW FINDER FOR TELEPHOTO AND W-A LENS (C) ..... Net 1.69
- F-490—Adapter ring for close up, filters, and auxiliary lenses. (D) Shpg. wt., 6 ozs. .... Net 1.95
- PACKAGE DEAL: One each of the auxiliary lenses, close up set, adapter, and view finder. Shpg. wt., 1 1/2 lbs. .... Net 29.95
- F-491 ..... 2.00 Down ..... Net 29.95

## NEW-BOOSTER EXPOSURE METER

**6.95**

WITH BOOSTER

- ASA Scale—LVS Scale • Stills or Movies
- Includes booster—Leather cases—neck cord

Extremely versatile — extremely simple. Highly legible direct reading dial. Speeds from 4 sec. to 1/1000 sec. Lens aperture settings from f:1 to f:32. ASA scale 6 to 800. LVS scale 1 to 18. Cine scale 8, 16, 24 and 32 frames per second. Booster cell makes possible readings at extremely low light levels. Small-rugged-lightweight. Includes booster cell, leather cases, neck cord and instructions. Shpg. wt., 1 lb.

F-349 List 11.95 Net 6.95



## FOLDING BC FLASH GUN

- FOLDS LIKE A FAN TO 4" x 2"
- EFFICIENT B-C OPERATION!



Brand new—unique—pocket size—completely folding flash unit at Lafayette's famous low-cost! Efficient 4 1/2" diameter metal reflector has pabbled finish to eliminate hot spots. B-C combination for surefire and hi voltage. Heavy molded battery case with built in test lamp—bulb ejector—extension socket. Standard shoe with pressure adjust fits accessory clips. Uses standard bayonet base flash bulbs. Novel, useful exposure guide built in on rear of case. Complete with card for PC fitting and condenser. Shpg. wt., 1 lb.

F-209 Complete with case Net 3.99

BA117 Battery for above Net 1.05



## ELEVATOR TRIPOD

**8.59**

- Folds to 16" including Panhead!
- Extends to 47" PLUS 7" Elevator!
- Tri-Tilt head — Moves in 3 planes!

For any small camera — 35mm — reflex — or movie. Professional quality for professional results. Strong — steady — lightweight. Pencil slim, chrome plated, brass legs. Lock securely in place — fold down readily. Single action tilt-pan — and swing over for taking pictures in vertical or horizontal format. Geared elevator centerpost with positive lock and folding crank. Weighs only 31 ozs. All the most wanted features in one tripod. Shpg. wt., 2 1/2 lbs.

F-339 List 19.95 Net 8.59

## New "SPEEDLITE" Electronic Photoflash system 110V AC or Midget Battery Pack

- FEATHERWEIGHT • SUPER POWERED • 4 SECOND RECYCLE • 50 WATT SEC. OUTPUT • COLOR BALANCED LIGHT • BUILT IN DIFFUSER


A) Designed by one of the foremost electronic flash engineers. More power—more practical features than any other unit in its price class. Thousands of flashes from one lifetime tube—pays for itself in savings on flash-bulbs—less than 1/2 cent per flash. Featherweight flash head weighs only 16 ozs. Entire unit—including battery—only 2 lbs. 4 ozs. Battery pack measures 5 1/2" x 3" x 1 1/2"—fits gadget bag or pocket. Coiled cord extends 5 ft. for off-camera or bounce flash. 15 ft. AC cord gives practically unlimited movement when operating on AC. Universal bracket fits any camera with a tripod socket. Gun also mounts on side of portable pack. Light is color balanced (6500° Kelvin) for color pictures without filters. Kodachrome guide 25—Tri-X guide 120. Recycles in 3 to 4 seconds. Speed 1/700 sec. flash duration. Gives soft, even, wide angle illumination. "Ready" light on head indicates flash is ready to fire. "Easy-off" clamp permits rapid off camera use. Socket on head for extension or multiple flash use. For any camera having X (zero delay) synchronization. Complete with battery, portable pack, 5 ft. coiled cord, shutter cord, 15 ft. A.C. cord, mounting bracket, clamp and instruction book. Shpg. wt., 4 lbs.

F-370 Replacement battery for above. Shpg. wt., 1 lb. 2.00 Down Net 25.95

BA-306 List 7.95 Net 5.56

### "Speedlite" Accessories

- B) "Bio-lite". Ring type strobe flash attachment. For perfectly flat, shadowless photos. Mounts on lens for close ups. For studies in medicine, biology, botany, numismatics, philately. Same guide numbers as F-370. Fits series 6 adapter ring. Shpg. wt. 2 lbs. .... 2.00 Down ..... Net 22.50
- C) "Booster" Capacitor. Fits on the bottom of F-370 Speedlite. Easy clamp-on attachment. Furnishes double the normal light output. Shpg. wt., ..... Net 10.39
- F-502 ..... Net 10.39
- D) EXTRA HEAD. Complete, second lamp head for extension use with the Booster. Shpg. wt., ..... Net 12.95
- F-503 ..... Net 12.95

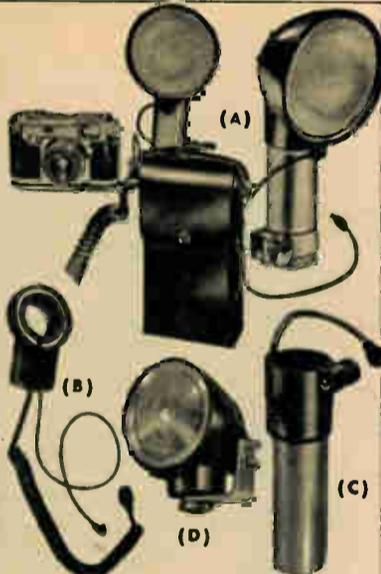

## PAN-HEAD TRIPOD

**4.49** • LIGHTWEIGHT — STURDY — LOW COST

Five section, chrome plated, brass tripod. Extends to 45" telescopes down to 12 1/2". Weighs only 20 ozs. Tension adjust screws for each leg. Camera retaining screw on panhead rotates — makes turning camera unnecessary. Pans and tilts with a single motion. Handle is detachable. Pans 360° — tilts 145°. A "must" to take the "jiggle" out of those special shots. Shpg. wt., 2 1/2 lbs.

F-295 Net 4.49

## 35 mm Slide File

**1.69** HOLDS UP TO 300 SLIDES



Portable all steel 35mm slide file. Store 150 2x2 glass slides or 300 2x2 cardboard slides. Includes index card, and numbered strips for quick, easy identification. Metal handle and 2 snap catches. Finished in platinum gray enamel.

F-161 ..... Net 1.69

## MOBILGRIP HANDLE FOR EASY PICTURE TAKING


**1.88**

Eliminate fuzzy pictures with a Mobilgrip handle. Constructed all-metal construction with pre-set rubber platform-tripod socket in base. Baked hammer-tone finish. Fits all standard movie cameras and light bars.

F-549—Handle Shpg. wt., 10 ozs. Net 1.88

## NEW "mini-pro" 2" x 2" MM SLIDE PROJECTOR

- COMPACT — ONLY 8 1/2" x 6" x 4 1/2" OVERALL
- BRIGHTER — SHARPER — EVEN IN LIGHTED ROOMS
- 80 mm f/3.5 COATED 3 ELEMENT LENS

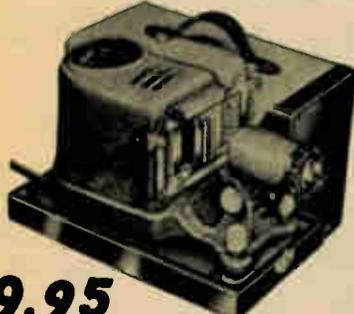

A new, portable projector for showing mounted 2" x 2" 35 mm transparencies. An unusually fine, compound lens system develops a brilliance seldom found in projectors of for higher wattage. Projection lens in a fully coated, 80 mm f/3.5, three element, triplet type, anastigmat, extremely fine, aspheric, multi-condenser system multiplies the lamp output giving the maximum illumination possible. Exceptionally bright—sharp images—even in lighted rooms. Highly efficient double tube venturi cooling plus hardened, heat absorbing filter. Slides will not "pop" out of focus—eliminates constant refocusing. Flat field projection eliminates the usual distortion. Projection distance ranges from 3 feet to 26 feet. Fill a 40" x 40" screen at 10 feet. At 26 feet you get a giant 8 ft. by 15 ft. picture. Elevating knobs tilt projector to desired angle. Weighs less than 3 1/2 lbs. Includes 150 watt projection lamp, attractive, sturdy carrying case, standard two slide carrier, six foot cord and protective lens cap. Shpg. wt., 5 lbs.

F-356—List 37.50 Net 19.95

## YASHICA Y-16 ULTRAMINIATURE CAMERA

- Foolproof "Clip" loading
- Speeds 1/25th to 1/200th Sec.
- Only 4" x 2" x 1" overall
- "Synched" for flash

Load and shoot in a second. Exclusive "clip-load" magazine-fast-foolproof. Permits changing from color to black and white film anytime-anyplace. Even if roll is only partially exposed—you "waste" only one frame! Combined "flip-action" film advance and shutter wind for truly rapid shooting. Fixed focus f/3.5 coated lens with stops to f:16. Click stop shutter speeds from 1/25th to 1/200th plus unique "slow" setting. The "S" setting permits variable slow shutter speeds and "Time" exposures. Built-in flash terminal (PC) and "X" synchronizations. Accurate exposure counter with automatic "zero" reset. Cable release socket and tripod socket. Film clip loads 24 B&W or color shots, 10 x 14mm negative. Magazines may be bulk loaded with either perforated or non-perforated 16mm film. Makes full size prints. All metal body. Includes leather case and wrist strap. Shpg. wt., 1 lb.

F-528 ..... 2.00 Down ..... Net 27.95

### Accessories and Film for Yashica Y-16



- F-25 Clipload Magazine: Black and White, Plus X, ASA 80. 24 exposures. Shpg. wt., 4 ozs. Net 1.13
- F-543 Clipload Magazine: Kodachrome, daylight type. ASA 10. 24 exposures. Shpg. wt., 4 ozs. Net 1.35
- F-542 Clipload Magazine: Empty, for bulk loading. Shpg. wt., 4 ozs. Net .79
- F-541 ..... Net .79
- F-545 Self Timer: Fits cable release socket of Y16 (F-528). 15 seconds delay—automatically retracts. Net 1.98
- F-543 Flash Unit: Fontype BC flashgun, folds down to 4" x 2". Includes clip to adapt to Y16 (F-528) camera. With cord and leather case. Less Battery. Shpg. wt., 1 lb. Net 5.25



Reg. 34.95

**27.95**

# COMPARE! →

# YOU CAN'T BEAT LAFAYETTES' WHOLESALE PRICES



## 900X

### "MICROBE HUNTER"



- The only Microscope in its class featuring GRADE A optics!
- Power Range 25X, 50X, 75X, 100X, 150X, 200X, 300X, 400X, 600X, 900X
- Full Range Fine Adjustment
- Safety Stop on Coarse Adjustment

Made to rigid design specifications—has wide usage in schools, laboratories and law enforcement agencies. All of the most needed features for diversified micro-studies. Power range from 25X to 900X in 12 possible combinations. Gearing rack and pinion coarse focusing. Micro-motion fine focusing—12 complete revolutions. 36mm (plano/concave) mirror. Fixed square stage, 70mm x 80mm.

Rotating 5-hole, disc diaphragm. Three Huygenian eyepieces of 5X, 10X and 15X. Four achromatic objectives of 5X, 10X, 40X and 60X. Oversize base insures stability. Body perfectly balanced at any angle. Complete with upright, wooden carrying case. Shpg. wt., 8 lbs.

F-338—List 69.95 ..... 2.00 Down ..... Net **34.50**

ONLY **34.50**

**44.50**

## 1200X

### "RESEARCHER"




- MAGNIFICATION RANGE 25X — 1200X
- 4 OBJECTIVES, 4 EYEPIECES,
- FULL RANGE FINE FOCUS ADJUSTMENT
- FULLY CONTROLLED, INTEGRAL MECHANICAL MOVEABLE STAGE

This superb instrument closely parallels the "Society" grade microscope in every desirable detail and yet is available at very low cost. Provides heavy, stable horseshoe base, smooth acting joint, enabling the body to turn through 60°, perfectly balanced at any angle. Tube length is 140 mm. Four Huygenian eyepieces and four achromatic objectives yield 16 combinations of power from 25X to 1200X. By means of two knurled micro-motion screws at the rear of the stage, it is possible for the operator to move the stage (and the slide) a distance of 3/16" - 1/4", (and the slide) in any direction, while looking through in any objective. Hardware is of the finest quality. Tubes are of the highest grade extruded brass. All fittings are expertly machined and threaded, making this scope suitable for the most exacting work. Scope comes with a set of 5 basic work. Scope comes with a set of 5 basic work. Scope comes with a set of 5 basic work. Scope comes with a set of 5 basic work.

F-369 ..... 2.00 Down ..... Net **44.50**

## PREPARED MICRO SLIDES

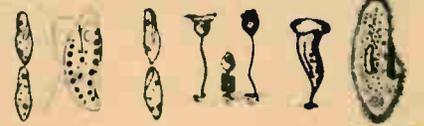

- SPECIALLY SELECTED MICRO-SUBJECTS.
- ADD TO THE ENJOYMENT OF YOUR MICROSCOPE.
- PROFESSIONALLY PREPARED.

AS LOW AS **79¢** PER SET

Specially selected slides of universal interest. Carefully prepared—cleaned, dissected, embalmed, stained, mounted and covered. Slides are professional size. Set includes 12 prepared slides and slatted, covered box for filling and storing. Shpg. wt., 8 ozs.

Stock No.	Description	Net ea.
F-123	Parts of Insects	1.39
F-124	Spiders and Disease Carriers	1.39
F-125	Tiny Creatures found around House	1.39
F-126	Sea Life	1.39
F-128	Structure of Blood	1.15
F-130	Life cycle of Insects	1.39
F-131	Bacteria	1.79
F-132	Pond, Marsh and Sea Life, Plankton	1.59
F-134	Micro-Animals	1.29
F-261	Textile Fibres	.79
F-262	Starch Grains—silver stained	.79
F-263	Structure of Leaves	.79
F-264	Plant Reproduction	.79
F-266	Money Bee Organs	.79
F-135	Micro-Organisms	1.29
F-136	Substance of Cells	.89

\*—Set of 6 slides

## 900 X "MICRO-PREP" KIT



- 100X to 900X IN 7 RANGES
- BUILT-IN SUB-STAGE LIGHT
- 2 MATCHED EYE PIECES
- INCLUDES DISSECTING SET,
- SPECIMEN, SLIDES

Monocular tube design made to educational standard. Uses geared rack and pinion for focusing. Coaxial knob adjustment permits smooth action. Fixed square stage is 70 mm. x 80 mm. with click-stop sub-stage diaphragm. Sub-stage is illuminated by built-in battery lamp, giving brilliant, color corrected field. Light is supported by a 35 mm. adjustable plano-concave reflex mirror. Huygenian eye pieces of 10X and 15X. 4 achromatic objectives—10X, 20X, 40X, and 60X. Combination of the two yields 100X, 150X, 200X, 300X, 400X, 600X, and 900X. Include 12 slides of which 8 are blank and four prepared. Dissecting kit consists of 1 spatula, 1 tweezers, 1 probe, 1 scalpel, 1 scissors and 1 magnifying glass. Overall height 11". Grey satin finished with chrome trim. Provided with handsome fitted cabinet with carrying handle. Shpg. wt., 6 lbs.

F-433 ..... Net **15.95**

**15.95**

## Brinnell Microscope

- Reads direct to 0.0005 inch
- Magnification 100X • Self Illuminated



Net **32.50**

Directly measures the size of Brinnell hardness impressions, or any object, down to .0005 in. Built in eye piece reticle is .05" long divided into 100 parts. Each 200th inch is numbered for direct read-out. Helicoid focusing of eye-piece corrects for diaphrag variations. Focusing of main tube by extremely fine rack and pinion. Illuminated by a pen light attached to an adjustable arm. Portability, rugged construction and high light efficiency make this an excellent general purpose industrial unit. Suitable for field work as well as lab and shop. Eye relief of approximately one inch permits use while wearing glasses. Complete with adjustable arm, penlight and fitted case. Shpg. wt. 2 1/2 lbs.

F-508 ..... 2.00 Down ..... Net **32.50**

## PHOTOMICROGRAPHY MICRO'DAPTER

- INEXPENSIVE — ACCURATE — EASY TO USE
- USE ANY CAMERA-MICROSCOPE SETUP
- RECORD ANY MICRO-OBSERVATION



Net **19.75**

The MICRO'DAPTER permits the use of any camera—even movie cameras—with practically all microscopes. May be used with all color and black & white film. No need to remove the camera lens. All exposures are made with the camera set at infinity. You view the specimen—choose the field of view—and focus while sighting through the MICRO'DAPTER's viewing telescope. Cross hairs are superimposed on the image for centering. The telescope is focusable for diaphrag variations. The image is automatically in focus for the camera when viewed in focus through the MICRO'DAPTER. An internal shutter shuts all the light to the telescope for viewing or to the camera when ready for exposure. The camera shutter is operated in the normal fashion. Accessory sleeves permit the MICRO'DAPTER to be used with other than Society size microscopes. The MICRO'DAPTER will also couple a camera to a telescope and may be used in the same manner as with a microscope. Complete with lateral viewing telescope, accessory sleeves and fitted case. Shpg. wt. 1 1/2 lbs.

F-506 ..... 2.00 Down ..... Net **19.75**

## SIMPLEX CYLINDER MICROTOME

Small, accurate microtome for freehand sectioning. Suitable for school use as well as lab applications where a hand operated feed is sufficient. Extremely well made to very close tolerances. Micrometer lead screw is graduated in 10 micron intervals. The ground glass stage is 75 mm in diameter. The microtome knife is of surgical steel, ground and tempered to produce and retain a keen cutting edge. Complete with knife and wooden storage case. Shpg. wt., 2 lbs.



F-442 ..... Net **16.95**

## NEW! 30X-70X STERO-SCOPE



- STEREOSCOPIC Binocular Dissecting Microscope
- Wide Field 3-Dimension View
- Two Models to Choose from


SEMI-PRO "STEREO-SCOPE": An especially engineered instrument featuring the stereopsis and wide view field needed in biology — petrography — archeology — mineralogy — criminology — industry — agriculture — etc. Indispensable for inspection of large specimens — small parts — surface features of gross objects — dissection — etc. Fixed objective lenses and interchangeable eyepieces for a choice of either 30X or 50X. Prismatic binocular head with full interpupillary adjustment. Ground glass stage 3-3/16" x 3-5/16". Oversize modified horseshoe base. Rack and pinion focusing. Automatic stop prevents over rise. Overall height 9 1/2". Complete with fitted wooden carrying case. Shpg. wt., 6 lbs.

F-337 ..... Net **21.50**



Net **17.95**

Net **21.50**

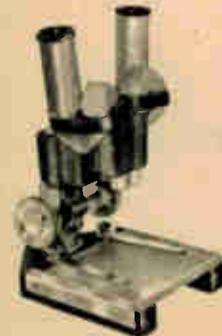

STUDENT "STEREO-SCOPE": A 30X stereoscopic binocular microscope—designed primarily for the student and serious hobbyist. Includes most of the features of our "Semi-Pro" model shown on this page. Fixed objective lenses and non-interchangeable eyepieces. All optics are achromatic. Ground glass stage measures 2 7/8" x 2-13/16". Overall height 7 3/4". Complete with fitted woden carrying case. Shpg. wt., 3 lbs.

F-335 ..... Net **17.95**

## LAFAYETTE MICRO-LITE

- USE WITH ANY MICROSCOPE
- FURNISHES BRIGHT, EVEN LIGHT



**2.95**

Specially designed for microscope illumination. Provides a bright, evenly lighted field of view. Controlled intensity, by means of focusable condenser lens. Lamp may be raised or lowered to any desired height on its 4 1/2" stand. Inclination and elevation joint permit swinging through 360° in both horizontal and vertical plane. Fully adjustable for transparent or opaque specimens, direct or indirect illumination. Invaluable where oblique light is necessary. Operate on 110-120 volts AC/DC. Lamp is easily replaced. Self contained switch, cord and plug. Lamp body is 3 1/2" long, stand is 5 1/2" high including base. Shpg. wt., 1 lb.

F-268 ..... Net **2.95**

## HUNTING WITH THE MICROSCOPE

NEW EDITION



Guide for beginners and advanced users of microscopes. How the microscope works. How to prepare and study cultures—set up a microscope zoo and garden—grow micro organism—perform micro surgery. Profusely illustrated with photographs and drawings. 14 chapters of easy-to-read, highly informative text.

BK-1440 ..... 136 PAGES 5 1/2" x 8" ..... Net **.89**

## DISSECTING INSTRUMENT SET

• SURGICAL QUALITY



**5.49**

**3.79**

Carefully chosen kit of most often used dissecting instruments in biology, botany, zoology, anatomy. All of the instruments are high quality. All metal parts plated and polished. Scalpels are of properly tempered, nickel plated steel. Dissecting probes have adjustable chucks and replaceable needles. Kit contains the following 14 pieces: Scalpel—all metal—1 1/2" fine tip blade. Scalpel—all metal—1 1/2" half blunt blade, spatula—2" x 1/2" blade. Dissecting needle, chuck type, curved. Dissecting needle, chuck type, straight. Dissecting forceps, medium point, straight. Dissecting forceps, medium point, curved. Probe with eye, 6" long. Blaw pipe, 3 1/2", I.D. 3mm to 1 mm. Small magnifier. Dissecting scissors, sharp points. Dissecting scissors, bandage type. Syringe, 2cc., with slip on needle. Set of pins. Complete in fitted wooden case. Shpg. wt., 1 1/2 lbs.

F-450 ..... Net **5.49**

Same fine quality as F-450. Contains 2 scalpels, spatula, 2 dissecting needles, 2 dissecting forceps, blowpipe, magnifier, scissors, pins. Smaller set contains only the essentials needed for general dissecting work. Instruments exactly as described in F-450. Complete with fitted wooden case. Shpg. wt., 1 lb.

F-451 ..... Net **3.79**

## MICROSCOPE STAGE MICROMETER



**3.95**

• GRADUATED TO 1/100 MM

Measures microscope field sizes—used for calibrating and standardizing microscope eyepieces. Fine polished glass slide, 75 mm x 25 mm, has a 1.0 mm scale with 100 graduations (0.01mm) ruled directly on it. Each fifth and tenth calibration is a larger line to aid in measurement. The lines are stained black and protected by a cover glass. Complete in hinged case. Shpg. wt., 6 ozs.

F-448 ..... Net **3.95**

## SLIDE PREPARATION KIT



• 30 Large Blank Slides

**.98**

30 glass slides, 3" x 1", in a fitted, sturdy cardboard container. Slatted guides hold slides upright for easy indexing. Includes slide covers and vial of mounting fluid. Shpg. wt. 1 lb.

F-533 ..... Net **.98**

## COLLAPSIBLE ILLUMINATED MAGNIFIER



**.98**

Collapsible lens pulls out, automatically lighting flashlight. Magnifies work 5 times. Ideal for examination of coins, stamps, etc. Size 4 1/4" x 1 1/4".

F-426 ..... ea. **.85**

Lots of 3 BA-155 Burgess Z battery (2 required for above) ea. **1.10**

# SAVE UP TO 75% on **RCA** GOLD LABEL SPEAKERS




**RCA "GOLD LABEL" PM REPLACEMENT SPEAKERS**  
**SAVE UP TO 75% QUANTITIES LIMITED**  
 Fine replacement speakers — all with 3.2 ohm voice coil

STOCK NO.	RCA NO.	SIZE	WATTS	MAG (oz.)	LBS.	LIST	NET
SK-165	2693-1	4"x6"	3	.53	1 1/2	3.75	1.19
SK-172	24652	4"x6"	3	.68	1 1/2	4.20	1.29
SK-173	44652	4"x6"	3	1.47	1 1/2	4.75	1.75
SK-170	2688-9	5"x7"	4	.76	2	4.25	1.40
SK-166	22951	6 1/2"	4	1.0	2	4.90	1.59
SK-167	2673-7	6 1/2"	5	2.15	2	5.75	1.79

*A Lafayette* **EXCLUSIVE SCOOP!**  
**THE STANDARD "NEUTRODE" CASCADE TUNER** **13.75**  
 Each  
 In lots of 3 **13.25**  
 Each

This is the latest design of the famous Standard Coil 12-channel tuners that have been used in more TV sets than any other. The "Neutrode" is an exact physical and electrical replacement for all previous Standard Coil cascade tuners, but is far superior in sensitivity and performance. Shaft is 6" long and can be cut easily to desired length—a perfect universal replacement. Supplied complete with 6CG8 and 6BN4 tubes and schematic diagram. Shpg. wt., 4 lbs.  
 TL-52—For 21 Mc. only ..... Net 13.75  
 In Lots of 3 ..... Each 13.25

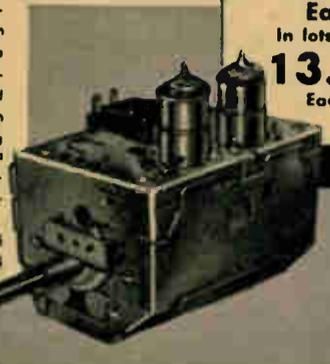

**1.28**

**SOUND TAKE-OFF COIL**

Designed for use with Cascade Tuner for T.V. Sets having separate video and sound I.F.'s Standard Coil No. XM752. Shpg. wt., 2 oz.  
 TS-309 ..... Net 1.28

## FLASH! RCA 6AC7-A TUBE

Made To Rigid Government Specifications

Only **QUANTITY LIMITED!**

**.59 SENSATIONAL LOW PRICE**



# SAVE UP TO 56% ON YOUR RECEIVING TUBE PURCHASES PLUS FREE!

**VALUABLE FREE GIFTS ON PURCHASE OF 15 OR MORE TUBES**



**30 WATT SOLDERING PENCIL**  
 Reg. Price **1.79**  
 FREE with Purchase of 15 Receiving Tubes

**TECHNICIAN'S ELECTRIC TOOL KIT**  
 Reg. Price **7.95**  
 FREE with Purchase of 50 Receiving Tubes

**20,000 Ohms-Per-Volt VOM**  
 Reg. Price **13.50**  
 FREE with Purchase of 100 Receiving Tubes

ALL BRAND NEW — FRESH STOCK — ORIGINAL BOXED TUBES • FULL 12 MONTH GUARANTEE • YOU MAY ASSORT FOR QUANTITY — PRICE SAVINGS!

TUBE TYPE	List Price	NET EACH IN QUANTITIES OF:			TUBE TYPE	List Price	NET EACH IN QUANTITIES OF:			TUBE TYPE	List Price	NET EACH IN QUANTITIES OF:			TUBE TYPE	List Price	NET EACH IN QUANTITIES OF:		
		1 to 5	6 to 49	50 or more			1 to 5	6 to 49	50 or more			1 to 5	6 to 49	50 or more			1 to 5	6 to 49	50 or more
024	2.15	1.14	1.05	.94	6AW8A	3.55	1.88	1.74	1.57	6S4A	2.05	1.09	1.00	.90	12BY7A	3.05	1.62	1.49	1.34
1B3GT	2.90	1.54	1.42	1.28	6AX4GT	2.65	1.40	1.30	1.17	6SK7	3.40	1.80	1.66	1.49	12SA7	3.70	1.96	1.81	1.63
1R5	2.55	1.35	1.25	1.12	6BA6	2.00	1.06	.98	.88	6SN7GTB	2.60	1.37	1.27	1.14	12SA7GT	3.25	1.71	1.59	1.43
1U4	2.35	1.24	1.15	1.03	6BC5	2.30	1.22	1.13	1.02	6SQ7	3.15	1.67	1.54	1.39	12SK7	3.40	1.80	1.66	1.49
1U5	2.05	1.09	1.00	.90	6BE6	2.20	1.17	1.08	.97	6T8A	3.35	1.77	1.64	1.48	12SQ7	3.15	1.67	1.54	1.39
1X2A/B	3.05	1.62	1.49	1.34	6BG6GA	6.50	3.44	3.18	2.86	6U8A	3.30	1.74	1.62	1.46	25L6GT	2.25	1.19	1.10	.99
3BZ6	2.30	1.22	1.13	1.02	6BK7B	3.35	1.77	1.64	1.48	6V6GT	2.15	1.14	1.05	.94	35C5	2.15	1.14	1.05	.94
3CB6	2.25	1.19	1.10	.99	6BL7GT	3.95	2.09	1.93	1.74	6W4GT	2.40	1.27	1.18	1.06	35L6GT	2.40	1.27	1.18	1.06
3V4	2.35	1.24	1.15	1.03	6BQ6GT/6CU6	4.35	2.30	2.13	1.92	6W6GT	2.85	1.51	1.40	1.26	35W4	1.40	.74	.69	.62
5U4GB	2.10	1.11	1.03	.93	6BQ7A	3.95	2.09	1.93	1.74	6X4	1.65	.87	.80	.72	35Z5GT	1.85	.98	.91	.82
5U8	3.30	1.74	1.62	1.46	6BZ7	4.00	2.12	1.96	1.76	6X5GT	2.05	1.09	1.00	.90	50C5	2.15	1.14	1.05	.94
5V4CA	3.30	1.74	1.62	1.46	6C4	1.85	.98	.91	.82	6X8	3.15	1.67	1.54	1.39	50L6GT	2.40	1.27	1.18	1.06
5Y3GT	1.75	.93	.86	.79	6CB6	2.25	1.19	1.10	.99	12AT6	1.85	.98	.91	.82	117Z3	2.50	1.32	1.22	1.10
6AC7	4.65	2.46	2.27	2.04	6CB6A	2.25	1.19	1.10	.99	12AT7	3.05	1.62	1.49	1.34					
6AF4A	4.00	2.12	1.96	1.76	6C66GA	5.80	3.06	2.84	2.56	12AU7A	2.45	1.29	1.20	1.08					
6AG5	2.60	1.37	1.27	1.14	6CG7	2.45	1.29	1.20	1.08	12AV6	1.65	.87	.80	.72					
6AL5	1.85	.98	.91	.82	6CQ6A	4.15	2.20	2.03	1.83	12AX7	2.55	1.35	1.25	1.12					
6AN8	3.50	1.85	1.71	1.54	6C	2.80	1.48	1.37	1.23	12BA6	2.00	1.06	.98	.88					
6AQ5A	2.15	1.14	1.05	.94	6K6GT	2.35	1.24	1.15	1.03	12BE6	2.15	1.14	1.05	.94					
6AU6A	2.10	1.11	1.03	.93	6L6GB	4.20	2.22	2.06	1.85	12BH7A	3.05	1.62	1.49	1.34					

NOTE: This is a partial listing. This gift offer also applies to your selection from our complete receiving tube listing on Pages 106 and 107, Catalog 600. Your order is shipped at current prices. You benefit from any price reductions during life of this catalog.

## LAFAYETTE BUDGET-PRICED TV PICTURE TUBES

• GUARANTEED ONE FULL YEAR

TOP QUALITY PICTURE TUBES IN FACTORY-SEALED CARTON — REBUILT BY TOP TV PICTURE TUBE MANUFACTURER AT LAFAYETTE ECONOMY PRICES!

STOCK NO.	TYPE	SHPG. WT. LBS.	NET PRICE LESS DUD	NET PRICE WITH DUD
PT-350X	12LP4A	17	12.75	11.75
PT-351X	14EP4/CP4	14	12.95	11.95
PT-352X	14EP4B/CP4B*	14	14.85	13.85
PT-353X	16AP4/AP4A	22	18.50	15.00
PT-354X	16GP4†	22	18.50	16.50
PT-355X	16KP4/RP4	21	12.75	11.75
PT-356X	16KP4A/RP4A*	21	15.00	14.00
PT-357X	17BP4/BP4A	21	15.50	12.00
PT-358X	17BP4B*	21	18.00	14.50
PT-359X	17CP4†	16	21.95	17.45
PT-360X	17GP4/TP4†	24	25.75	21.25
PT-361X	17HP4/RP4	24	19.75	16.25
PT-362X	17HP4B/RP4C*	24	21.40	17.90
PT-363X	17LP4/VP4	23	17.25	15.00
PT-364X	17LP4A/VP4B*	23	18.25	16.00
PT-365X	19AP4A†	24	22.50	21.50
PT-366X	19AP4B†	24	22.50	21.50
PT-367X	20CP4A/DP4A	29	18.50	16.00
PT-368X	20CP4D/DP4C*	29	20.25	17.75
PT-369X	21AP4	25	29.00	23.00
PT-370X	21ACP4A/AMP4A/BSP4*	35	21.50	16.50
PT-371X	21ALP4	35	21.50	16.50
PT-372X	21ALP4A*	35	26.25	21.25
PT-373X	21AUP4/AVP4A	35	23.25	18.25
PT-374X	21AUP4B/AVP4B*	35	26.25	21.25
PT-375X	21CBP4A*	35	26.25	21.25

STOCK NO.	TYPE	SHPG. WT. LBS.	NET PRICE LESS DUD	NET PRICE WITH DUD
PT-376X	21EP4A	35	19.50	17.00
PT-377X	21EP4B*	35	21.00	18.50
PT-378X	21FP4A/KP4A	35	20.75	18.25
PT-379X	21FP4C/KP4C*	35	23.00	20.50

STOCK NO.	TYPE	SHPG. WT. LBS.	NET PRICE LESS DUD	NET PRICE WITH DUD
PT-380X	21WP4	31	22.00	19.50
PT-381X	21WP4A*	35	24.75	22.25
PT-382X	21YP4	35	21.50	16.50
PT-383X	21YP4A*	35	24.00	19.00

STOCK NO.	TYPE	SHPG. WT. LBS.	NET PRICE LESS DUD	NET PRICE WITH DUD
PT-384X	21ZP4/ZP4A	35	21.00	16.00
PT-385X	21ZP4B	35	23.50	18.50
PT-386X	24CP4A*	44	34.00	27.75
PT-387X	24CP4A*	44	35.25	29.00
PT-389X	24DP4A*	44	35.50	29.25

Net price "with DUD" based on your prepaid shipment or delivery of old picture tube (Dud). Returned tubes must be intact and without scratches. When ordering give stock number and type. \* indicates tubes with aluminized screens. † indicates metal tubes.

**Lafayette BATTERIES**  
 AT TREMENDOUS SAVINGS  
 These popular batteries are for Portable and Transistor radios, R/C equipment, experimenters, labs, and hobbyists, etc.

FRESH STOCK — BRAND NEW — GUARANTEED  
 Here are six of the most popular types used and at **RIDICULOUSLY LOW PRICES**

Stock No.	Voltage	Net Each	Lots 10	RCA	Burgess	Eveready	Others
BA-1	67 1/2	1.59	1.49	VS215 VS216 VS218	P45 P45M	477	BL-M145
BA-2	9	.59	.53	VS312 VS323	2U6	216	BL-006P
BA-3	9	.59	.53	VS300A VS314	P6	226	BL-M106
BA-5	67 1/2	1.29	1.19	VS318	UX45	416	BL-045
BA-6	67 1/2	1.43	1.33	VS016	XX43	467	BL-145
BA-7	9	.59	.53	VS-309A	3-177	Mal	TR-177

# LOW LAFAYETTE PRICES AUTO ACCESSORIES-AMERICAN & FOREIGN!

## MOTOROLA

### FOREIGN CAR RADIOS • SAVE 50%

- TRANSISTOR POWERED
- CUSTOM DESIGN

**\$39<sup>95</sup>**  
\$2 Down



COMPLETE  
NOTHING  
ELSE TO BUY.  
ONLY 2.00  
DOWN

- Perfect For Sports Cars, Boats And Trucks
  - Special Transistor Powered Circuit Eliminates Noise And Provides Low Battery Drain.
  - Extremely Compact — Will Mount In-Dash, Under Dash Or In Specially Positioned Installations
  - Automatic Volume Control
  - Self Contained 5" Golden Voice Speaker
  - Measures 6 7/8" W x 2 1/2" H x 7 1/4" D
- Available for 6 or 12 Volt — Specify Make and Model of Car  
CR-18 Shpg. wt., 6 Lbs. 2.00 Down Net 39.95

#### CONSULT THIS CHART FOR YOUR FOREIGN OR SPORTS CAR

ALFA-ROMEO 1956-59	DKW 1956-59	HILLMAN MINX 1957-58	PEUGEOT 1958-59*	SUNBEAM RAPIER 1955-59
ARNOLD BRISTOL 1955-59	ENGLISH FORD ANGLIA, ESCORT PREFECT, SQUIRE 1958-59	JAGUAR (ALL) 1950-59	RENAULT DAUPHINE 4CY-1955-58*	TANAU 1959
AUSTIN 1956-59	ENGLISH FORD CONSUL-ZEPHYR ZODIAC 1957-59	LLOYD 1957-59	RENAULT DAUPHINE 4CY-1959*	TRIUMPH (ALL) 1955-59
BMW (ISETTA 300) 1957-59	ENGLISH FORD CONSUL-ZEPHYR ZODIAC 1957-59	MERCEDES BENZ 1955-59*	RILEY 1957-59	VAUXHALL 1958-59
BMW (ISETTA 600) 1958-59	FIAT ROADSTER 1957-59	MGA 1958-59	ROVER 1958-59	VOLKSWAGEN 1952-57*
BORGWARD 1957-59*	FIAT ROADSTER 1957-59	MORRIS MINOR 1956-59	SAAB 1958-59	VOLKSWAGEN 1958-59*
BRISTOL 1957-59	FIAT (600-1100) 1957-59	NSU PRINZ OPEL 1958-59	SIMCA ARONDE 1958-59	VOLKSWAGEN GHIA 1955-59
CITROEN (ID-19) 1956-59	GOGOMOBIL 1958-59*	PANHARD 1957-59*	SIMCA VERSAILLES 1958-59*	VOLKSWAGEN BUS 1955-59*
CITROEN (DS-19) 1958-59*		PORSCHE (ALL) 1957-59*	SIMCA CPE. DE VILLE 1958-59	VOLVO 1957-59*

\*Radio is Available For Sports And Foreign Cars Noted In Above Chart.

### NEW! MOTOROLA TRANSISTOR-POWERED MANUAL TUNING CAR RADIO

Also Available for  
Sports Cars

**\$45<sup>20</sup>**

ONLY 2.00 DOWN

Specify make and year of your car

BUICK 1954 thru 59	NASH RAMBLER 1957 thru 59
CHEVROLET 1953 thru 60	OLDSMOBILE 1954 thru 59
GMC TRUCK 1953 thru 60	PLYMOUTH 1953 thru 59
EDSEL 1958 thru 59	PONTIAC 1957 thru 59
FORD 1953 thru 60	STUDEBAKER 1955 thru 60

This transistor powered car radio installs easily on the dash of most cars. Features 7 tuned circuits with 5 tubes plus transistor, noise eliminator-circuit, automatic volume control, tone control and 6 x 9" external speaker. Size 7 1/2" W x 2 1/2" H x 5 3/4" D. For 12 volt cars. Shpg. wt., 7 lbs.  
CR-10 ..... 5.00 Down ..... Net 50.20  
For 6 volt cars: Similar to above, but with 5 tubes and rectifier, no transistor, and 5" x 7" external speaker. Shpg. wt., 9 lbs.  
CR-11 ..... 2.00 Down ..... Net 45.20



ALSO  
Available  
for SPORTS  
CARS  
with \* in  
this Chart



### NEW! SCHAUER 6 & 12 VOLT KAR-START STARTS WET OR COLD ENGINES INSTANTLY! ONLY 5.15

If you park your car outside in wet or wintry weather, you need Kar-Start. At instant of starting, Kar-Start sends five times the normal amount of spark from your plugs for sure-fire starts. Used for starting only. It is automatically disconnected when engine is running. Will not damage plugs or distributor. Simply, easily installed with just 3 quick connections. Save your battery, time and temper. Shipping weight 1 lb.

MS-710 for 6 and 12 Volt cars List 7.95 Net \$5.15

#### REAR SEAT AUTO SPEAKER KITS



#### 6" x 9" KIT WITH CHROME OR GOLD GRILLE

Complete kit for adding second speaker in rear of your car. Includes a 6" x 9" PM speaker, 3 position selector switch for cutting in front, rear, or both speakers; dial plate with mounting bracket, knob, and hardware, chrome or gold grille; wire, and wiring instructions. Simple to install. Shpg. wt., 5 lbs.  
SK-94 Speaker kit (specify chrome or gold grille) Net 3.45

#### DELUXE 6" x 9" KIT with 2.15 oz. ALNICO V MAGNET

Same as above but with deluxe speaker with extra-heavy Alnico V magnet (2.15 oz.). This is same speaker used in kits selling at twice the price. Shpg. wt., 5 lbs.  
SK-37 Speaker kit (specify chrome or gold grille) Net 4.65

#### 5" x 7" KIT

Same as SK-94 but with 5" x 7" speaker and grille (specify chrome or gold). 5 lbs.  
SK-42 Net 3.05

#### FADER TYPE AUTO KITS

Rear-seat speaker kits identical to those above except with fader-type controls to cut either speaker in or out or balance both. Shpg. wt., 5 lbs. Specify chrome or gold grille.

SK-55 5" x 7" kit. Same as SK-42 but with fader control. Net 3.29

SK-95 6" x 9" kit. Same as SK-94 but with fader control. Net 3.69

#### DELUXE 6" x 9" FADER KIT

Deluxe kit with extra-heavy-magnet 6" x 9" speaker, plus fader control. Specify chrome or gold grille. Shpg. wt., 5 lbs.

SK-56 6" x 9" kit. Same as SK-37 but with fader. Net 4.89

#### 3 SECTION 59" AUTO ANTENNA



- Easy to Mount
- Pulls In Those Long Distance Stations
- Rust Proof Construction

**\$189**

Measures 23" collapsed and extends to 59". Employs polyethylene insulator — easy mounts on fender or trunk. Shpg. wt., 1 1/4 lb.

AA-21 Net 1.89

#### NEW! BLAUPUNKT FM-AM-MARINE PUSHBUTTON CAR RADIO HI-FI IN MOTION!

Complete with Installation Kit and AM-FM Antenna

- No fadeout under bridges and underpasses
- Marine band for weather and marine broadcasts
- Sensitivity: FM—1.5 microvolts for 20 db. quieting; AM—3 microvolts
- Response 40-16,000 cps.
- Transistor powered
- For 6 or 12 volt systems
- Built-in rear speaker socket
- 6 tubes, 1 selenium rectifier, 2 Germanium diodes (15 tube function)
- Dimensions: Receiver 7 3/8" x 3" x 6 3/8"; Power Pack 7 1/4" x 3 3/8" x 1 7/8"
- Shpg. wt., 20 lbs.


CR-21WX 5.00 Down Net 129.50



**129.50** only  
5.00 Down

MAKE	YEAR
Buick	1960
Chevrolet	1958-1960
Corvaire	1960
Dodge	1958-1960
Desata	1958-1960
Chrysler	1958-1960
Falcon	1960
Ford	1958-1960
Oldsmobile	1958-1960
Plymouth	1958-1960
Pontiac	1958, 1959
Rambler	1958, 1959

#### MITYMITE BATTERY CHARGER

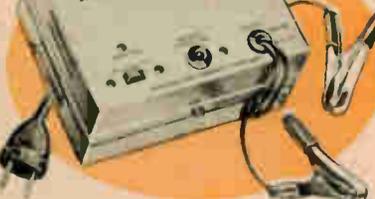

- KEEPS BATTERIES AT PEAK POWER
- RECHARGES RUN-DOWN BATTERIES
- AUTOMATICALLY CUTS OFF

FOR 6 & 12 VOLT BATTERIES

**5.95**

Keep your battery at peak power; prevent battery destruction caused by infrequent use or over use. Safe 1/4 Amp charging rate automatically cuts off when battery is fully charged. Operates on regular household current. For 6 or 12 Volt batteries. Trouble light indicates proper connection to battery. Will also recharge run-down batteries. Guaranteed for one full year. Size 4 1/2" x 1/2" x 2 1/2". Shpg. wt., 2 lbs.  
MS-720 List 9.95 Net 5.95

UL APPROVED

#### NEW! "Spring Back" REPLACEMENT ANTENNA STAFF

ONLY  
**.99**

Stainless steel replacement staff easily replaces antennas lost through vandalism or accident. Powerful coil spring in the antenna base prevents deliberate or accidental "snap-off". Simple set screw mount on stub of broken antenna. Stainless steel for maximum strength and corrosion resistance. Overall length 28". Shpg. Wt. 1 lb.  
AA-40 Net .99

#### 8 ft. BATTERY BOOSTER CABLES



MS-766

**1.78** set of 2

- A MUST FOR ALL CARS WITH AUTOMATIC TRANSMISSIONS

A life saver in case of battery failure. These heavy duty rubber covered cables are perfect for starting stalled cars, charging batteries, etc.—Rugged copper-clad positive active grips identified by Black and Red heavy vinyl covered handles. Shpg. wt., 3 lbs.  
MS-766 8 ft. long, set of 2 Net 1.78  
MS-767 12 ft. long, set of 2 Net 2.25

#### "Zippy" Drain Auger



**3.89**

- 15 ft. Super flexible cleaner

"Zippy" quickly cleans obstructions in drains, sinks, waste lines, tubs, eaves and gutters. Scaled down version of the professional tool. Designed for home, shop, garage and light industrial use. Flexible 15 ft. by 1/2" in. spring steel rod coils neatly in the canister when not in use. Only the length of rod required for the job is withdrawn from the canister. Reams out obstructions quickly, cleanly, easily. Cork-screw head allows tip to pass through crossbars without dismantling traps or drains. Entire rod retracts into the baked enamel finished, self storing steel canister. Will not damage pipes or chemical cleaners. Shpg. Wt. 4 lbs.  
MD-683 Net 3.89  
Giant "Zippy": Same as MD-683, but with 26 ft. rod. Shpg. Wt., 6 lbs.  
MD-684 Net 5.89

# LAFAYETTE is your HEADQUARTERS for TV ANTENNAS AND ACCESSORIES!

try to BEAT these ANTENNA PRICES!

in lots of 3  
**4.95**  
EACH

REGULAR LIST **13.45**  
OVER 60% OFF!

- ALL ALUMINUM
- NO LOOSE PARTS
- FASTEST INSTALLATIONS

FULL 20 ELEMENT STACKED  
Snap Open Conical

SINGLY EACH  
**5.25**

Best antenna deal yet for servicemen-dealer and installation specialists. All the most wanted features. Quickest-easiest installation possible. No loose hardware. All elements snap open and lock in without tools. Most efficient conical design for all reception areas. Two complete bays with Q bars, less mast. Shpg. wt., 8 lbs. Via Express only. **4.95**  
Lots of 3, ea. **5.25**  
AN-28-WX Singly, ea. **5.25**  
"U-INSTALL-IT" KIT With All Angle Roof Mounts. Includes AN-28 antenna and installation kit as shown with two 5 ft. masts. **Net 7.95**  
AN-32-WX Via Express only. Shpg. wt., 18 lbs. **Net 8.75**  
"U-INSTALL-IT" KIT With Chimney Mount. Same antenna and accessories but includes chimney mount instead of roof mount. **Net 8.75**  
AN-43-WX Via Express only. Shpg. wt., 18 lbs. **Net 8.75**

## FAMOUS BRAND Color 'Tenna

PRICE BREAK - Over 50% Off!

LIST **29.95**

**SALE 13.95!**

Gold Anodized

- High Gain On All VHF Channels
- Completely Factory Preassembled
- Electronic Lens Design
- Highly Directional - Yagi Performance


Lafayette is the FIRST to offer this nationally tried and proven antenna at close to 25% off the regular dealer price. This is the same fine antenna with all its exclusive features—that sells for dollars more than our record-breaking price. Check these features: Electronic Focusing—High Gain—all VHF channel coverage—gold-anodized quality construction—Highly directional—outstanding fringe area reception—compact design dynamically balanced. All-aluminum construction—automatic hardware. Shpg. wt., 8 lbs. Via Express only. **AN-51 WX—List 29.95**

Complete Kit of AN-51 antenna plus AM-12 mtg. kit as shown. Shpg. wt., 15 lbs. **Net 13.95**  
Net ea. in lots of 3, **13.25**  
AN-52 WX **Net 14.30**

### NEW! SUPER FRINGE AREA ANTENNA

- THE MAXIMUM ANTENNA FOR YOUR AREA.
- MAXIMUM CONSTRUCTION.
- PERFECT 300Ω MATCH ON EACH CHANNEL.


The most recent advance in antenna design and construction. Extremely high gain and front to back ratio. Phasing relationship assures equal gain on all VHF channels. Eliminates channel interference. Elements are double locked in high impact Styrene plastic Insulators. Automatic brackets lock and secure all elements. Completely preassembled. Entire antenna snaps open and locks in. Dual insulators prevent waver, slip and twist of elements. All aluminum construction. Single bay. Less mast. Shpg. wt., 12 lbs. **14.55**

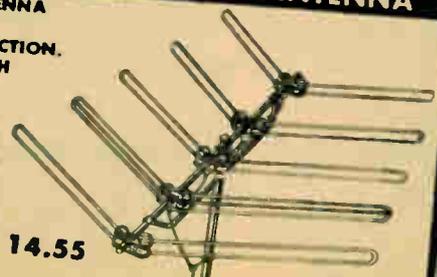

AN-37WX List 33.19  
AN-38WX 2 Bays stacked  
"U Install It" Kit. Includes AN-37WX and roof mount kit AM-10 with one 5 ft. mast. Shpg. wt., 20 lbs. **2.00 Down Net 14.55**  
AN-40WX  
Stacked Kit. Includes AN-38 and roof-mount kit with AM-11. Shpg. wt., 32 lbs. **2.00 Down Net 29.38**  
AN-41WX **Net 16.93**  
AN-42WX **Net 32.69**

### TV PICTURE TUBE SHORT ELIMINATOR

- Burns off Picture Tube shorts
- Lengthens Picture Tube life




**.99**

Eliminates expensive picture tube repairs. No elaborate equipment needed. Repairs grid and cathode shorts in two minutes—without pulling the chassis Easy to use—decontaminates cathodes—restores operation of brightness control. Can be used as often as needed. Simple "plug-in, switch-on" operation. Works with any TV picture tube. Shpg. wt., 1/2 lb. **TS-282 Net .99**

### Famous Brand SUPER Color 'Tenna

20 Elements—Up to 125 miles  
OVER 50% OFF

- ELECTRONIC LENS DESIGN
- HIGHLY DIRECTIONAL-YAGI ENGINEERED
- COMPLETELY PREASSEMBLED
- MORE GAIN ON ALL VHF CHANNELS




**16.98**

Well known, field proven, deep fringe antenna—at dollars below the regular dealer price. All the exclusive features that have made this antenna a national favorite for "problem area" reception. Electronic focusing—20 elements for more gain—quality construction—1" square crossarm—1" round driven elements—1" tubing boom brace—easy installation—automatic hardware—all aluminum construction. Dynamically balanced design—outstanding fringe area performance. Shpg. wt., 10 lbs. **Net 16.98**

AN-63WX Kit AK-34. Includes AN-63WX SUPER color 'tenna; 20 ft. telescoping mast and accessories. Shpg. wt., 30 lbs. **2.00 Down Net 25.95**  
AN-64WX Kit AK-35. As above, including Alliance K-22 rotator and additional accessories. Shpg. wt., 52 lbs. **5.00 Down Net 51.40**


### "U-INSTALL-IT" KITS!



All aluminum 8 element conical. Full sized. Rugged insulator block. Designed for rapid assembly. Fan front of 6 full length elements. Real value. Shpg. wt., 4 lbs. **AN-11W** Singly ea. **Net 2.60**  
Lots of 3 ea. **Net 2.40**

"U Install It" Kit. Includes AN-11 and roof-mount kit as shown with one 5 ft. mast. Shpg. wt., 11 lbs. **Net 4.95**  
AN-33W **Net 4.95**

"U Install It" Kit. With chimney mount instead of roof mount. Shpg. wt., 11 lbs. **Net 5.50**  
AN-44W **Net 5.50**



Popular primary area antenna. Rugged aluminum construction. Light weight easy to install. Sharply directional. Shpg. wt., 4 lbs. **AN-21W** **Net 2.29**

"U Install It" Kit. Includes AN-21W and roof mount kit, with one 5 ft. mast. Shpg. wt., 11 lbs. **Net 4.59**  
AN-20W 2 bays stacked **Net 4.59**

"U Install It" Kit. With chimney mount instead of roof mount. Shpg. wt., 11 lbs. **Net 5.29**  
AN-46W **Net 5.29**

#### TV TUBE BRITENER

**.79** in lots of 10

Absolutely no tools or soldering needed for installing this handy inexpensive tube rejuvenator. You simply attach two plugs as directed on the instructions. For magnetic tubes and PARALLEL CIRCUITS only. Restores brightness contrast. **MS-12** in lots of 10, each **.79**—singly **.89**

#### UNIVERSAL TV TUBE "BRITENER"

EACH **\$1.29** SINGLY  
in lots of 6 **1.39**

Restores brightness to dim TV picture tubes. Operates on all types—magnetic or electrostatic—and in all circuits—parallel or series. **TS-170**—in lots of 6 **each 1.29**  
Singly **each 1.39**

#### 300 OHM TWIN-LEAD

**1.39** COPPER CONDUCTORS  
per 100 ft. LO-DISS POLYETHYLENE

High quality, low-loss lead-in for all TV and FM installations. Polyethylene dielectric—standard copper leads. Shpg. wt., 2 lbs. per 100 ft. **1.39**  
Stock No. **WR-25**—100 ft. **5.75**  
500 ft. **10.95**  
1,000 ft. **19.95**

#### TV ANTENNA MASTS

STEEL MASTS. New corrosion-resistant 5 ft. steel mast made to fit all antennas. One end is tapered. "Jam Fit" construction with locking key. 1 1/2" O.D.

TL-12W 5 ft. Wt., 2 1/2 lbs. **.69**  
TL-13WX 10 ft. Wt., 4 1/2 lbs. **1.29**  
TL-14WX 10 ft., 16 gauge. Wt., 8 lbs. **1.89**

ALUMINUM MASTS. 18 gauge-heavy wall-high tensile strength. Rust and corrosion proof. Swaged for stacking.

TL-66W 5 ft. Wt., 1 1/2 lbs. **1.20**  
TL-17WX 10 ft. Wt., 2 1/2 lbs. **2.30**  
10 Ft. Mast shipped via express only.

#### ECONOMY MOUNT

**99¢**

Can be erected in minutes; without special tools or drilling. Adjustable, two-section design permits unlimited spacing between brackets for maximum support of masts 1/2" to 1 1/2" O.D. Complete with two 12-ft. lengths of 3/8" galvanized steel bands and hardware. Shpg. wt. 3 lbs. **TS-82. Net Each .99**


#### GOLD ANODIZED ALUMINUM MASTING

• IDEAL MAST FOR GOLDEN ANODIZED ANTENNA

This Golden Anodized aluminum mast will outlast any antenna. Made of a tough, extra strong, drawn aluminum alloy. This .050" wall mast is stronger than a 20 gauge steel mast. Permanently eliminates corrosion problems. Ends are swaged for "jam-fit" so that two or more masts may be telescoped together.

TL-115W 5 ft. Wt. 1 1/2 lbs. **Net 1.70**  
TL-116WX 10 ft. Wt. 2 1/2 lbs. **Net 3.26**

### ALL CHANNEL'S "RIVIERA" WORLD'S MOST POWERFUL ULTRAFRINGE VHF—UHF—FM ANTENNA

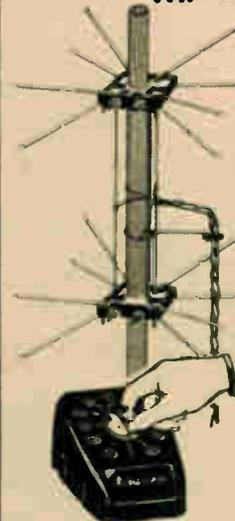

GUARANTEED 200 MILE VHF RECEPTION OR YOUR MONEY BACK

- Receives channel 2-83 from all directions without a rotor
- Broadband UHF-VHF and FM, motorless all direction reception
- All aluminum flip-out assembly

Field tests reception on VHF of up to 200 miles has made possible this unprecedented guarantee. Here is an antenna with one transmission line for all UHF, VHF and FM stations in all directions without the use of a rotator. The nine position selector switch connected at the set electronically rotates antenna beam instantly without physically moving the antenna. Gain on channels 2-4 comparable to 4-bay conical; on channels 7-13 comparable to stacked 10-element single channel yagi; on 14-83 comparable to bow-tie reflector. 1 1/2" dowel aluminum elements are 40 inches long. Complete with switch, coupler, 45" stacking bars and 2 7/8" angle type mast insulators for Polymicalene line listed below. Shpg. Wt. 10 lbs. **AN-135WX Less Mast Net 19.85**


THE RIVIERA MUST BE USED WITH THE LOSS LEAD IN WIRE LISTED BELOW

"U-Install-It" Kit: Includes Riviera antenna, chimney mount, two five ft. masts, 100 ft. of Polymicalene 4 conductor lead-in wire, 8 stand off insulators and complete instructions. Shipping wt., 16 lbs. **AN-42-WX** **2.00 Down Net 29.95**

ALL CHANNEL LEAD-IN WIRE FOR USE WITH RIVIERA ANTENNA  
Special 4 conductors, matched impedance transmission line. Low loss, mica-filled Polymicalene copperweld conductors.

WR-8 - 50 ft. length **Net 5.00** WR-18 - 100 ft. length **Net 8.90**  
WR-9 - 75 ft. length **Net 7.50** over 100 ft., per 100 ft. **Net 8.90**

### INSTALLATION ACCESSORY KITS

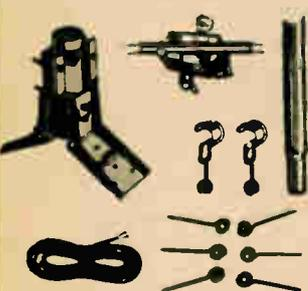

All the accessory items necessary to do a quick, easy installation from roof to receiver! You get an all angle roof mount—lightning arrester—75 feet of 300 ohm twin lead—6 insulated screw eyes—2 insulated mast standoffs and a 5 ft., 1 1/2" OD steel mast. Shpg. wt., 7 lbs.

AM-10W ea. **2.95** Lots of 3, ea. **2.85**  
AM-11W with 2—5 ft. masts. Shpg. wt., 10 lbs. Singly, **3.55** Lots of 3, ea. **3.35**  
AM-12W Same as AM-10 but with chimney mount. Ea. **3.25** Lots of 3, ea. **3.15**  
AM-13W Same as AM-11 but with chimney mount. Ea. **3.85** Lots of 3, ea. **3.75**

## AMPHENOL

### INDOOR TV ANTENNA WITH TRUE "VIDEO FIDELITY"

- Slender Line Styling With Foldaway Elements
- Slide Rule Tuning
- Transformer Coupling
- Power Packed Performance

Only Lafayette can bring you this sort of bargain... a truly acceptable indoor antenna at but a small fraction of its regular price. This is not just another indoor TV antenna, but designed for true video fidelity—featuring "slide rule" tuning with inductive reactance network for fine picture adjustment and transformer coupling for strict impedance matching. Elements fold from sight when not in use. You can look far and wide but nowhere will you find another antenna comparable to this AMPHENOL unit in beauty and performance or at this LAFAYETTE price! Get yours while they last—a word to the wise is sufficient!

AN-65 Indoor TV Antenna **Net 2.9**

UNBELIEVABLY PRICED AT

**2.69**

"TOP BUY" WHEN SOLD AT **14.95**



#### TUNER CLEANER

• Infector Type  
• Cleans & Lubricates  
• Eliminates Noise  
• Long Lasting Protection

New, wax-free lubricant. Contains no carbon felt. Non-toxic, non-inflammable. Hypa-style injector needle prevents drift and drip. Retards Corrosion—keeps tuners cleaner longer. Easily reaches hard-to-get at spots. Does not affect electrical properties—harmless to insulation and soldered joints. Easy-to-use—long lasting. Shpg. wt., 12 oz. **TS-324 Net .90**

#### TWO SET COUPLER

**.55** in lots of 6

Uses one antenna for two sets. Compact electronic set coupler assures performance of two TV sets on one installation. Easy to connect. Nothing to go wrong. Shpg. Wt. 1 lb.

TS-326 **Each .59**  
In lots of 6 **Each .55**

### NEW! TV TUBE RESTORER

FOR ALL PICTURE TUBES EXCEPT 110° TYPES LOCATES AND CORRECTS FOR

- OPEN CATHODE
- HEATER TO CATHODE SHORT
- OPEN CONTROL GRID
- CONTROL GRID TO CATHODE SHORT
- LOW EMISSION
- COMBINATIONS OF ABOVE

One simple unit provides the cure to any defective picture tube in any TV set. Works on electrostatic or electromagnetic focus picture tubes in series or parallel-wired filament TV sets. Corrects for dozens of picture tube faults. **TS-268** Shpg. wt., 1 lb. **Net 3.23**

# IT'S LAFAYETTE for POPULAR CITIZENS BAND TRANSCEIVERS

## FOR: BUSINESS, INDUSTRY, BOATS, FARM, SPORTS, ETC.



22 recently assigned radio channels within the 26.965 to 27.225 megacycle range (11 meters) make possible 2-way communications in a great number of business and personal applications. Station license is easy to obtain — merely fill out single FCC form (supplied) . . . no exam or special skill is required.

### GONSET G-12 MULTI-CHANNEL 2-WAY CITIZENS BAND RADIO

- 4 Crystal Controlled Transmit And Receive Channels
- Transmitter Tuning Indicator
- Adjustable Squelch



4 quartz crystal controlled channels (any 4 of the 22 authorized) provide fullest operational versatility—permit instant switch to other channels if voice traffic is especially heavy or interference is present on channel in use. Also allows various stations in system, such as cars, trucks, boats to be assigned different channel frequencies. Features press-to-talk switch on microphone, noise limiter, built-in speaker and adjustable squelch, resistant to moisture and impervious. Universal power supply for 117 VAC and 12 VDC. Tube complement: 6CX8 (Osc-Doubler-Final); 6AU6 (RF); 6UBA (Osc-Mixer); 6BH6 (1st IF); 6BA6 (2nd IF); 6AV6 (Det-1st Audio); 6AL5 (ANL-Gated Squelch); 6BQ5 (Audio Output/Mod). Complete with push-to-talk ceramic microphone, universal desk stand/mobile mounting bracket, and transmit and receive crystals for one channel. 4 1/2" H x 7" W x 10" deep. Shpg. wt., 13 lbs. HE-537WX Model 3316 5.00 Down Net 149.95

### GONSET G-11 SINGLE CHANNEL CRYSTAL CONTROLLED TRANSCEIVER

Complete with press-to-talk microphone and set of transmit-receive crystals for channel 8. Shpg. wt., 10 lbs. HE-537WX Model 3303 For 115 VAC 5.00 Down Net 124.50 HE-528WX Model 3304 For 12 VDC 5.00 Down Net 124.50 HE-529WX Model 3305 For 6 VDC 5.00 Down Net 124.50 Model 3297 Mobile Antenna Cowl loaded whip. Shpg. wt., 2 lbs. HE-531 Net 13.50 Extra set of matched transmit and receive crystals for G-12 & G-11 Specify frequency. HE-538 Per Set Net 5.90

### INTERNATIONAL CRYSTAL "EXECUTIVE" CITIZEN BANDER

- 3 Crystal Controlled Transmitting Positions
- 2 Crystal Controlled Receive Positions
- Dual Conversion Superhet Receiver Tunes All 22 Channels



The International Crystal "Executive" class D Citizen band transceiver features push-to-talk operation, 3 crystal controlled transmitting positions, 2 crystal controlled receive positions, dual conversion superhet receiver tuning of all 22 channels, and crisp and clear full modulation. Has 11 tubes, 4 of which are multi-purpose, and one diode, resulting in 16 tube performance. High impedance push-to-talk crystal microphone or carbon microphone input. Normally supplied with one transmit crystal for channel 9; 2 additional transmitting crystals and 2 receiving crystals available for any of the 22 channels. Operates on 115 VAC, 6VDC and 12 VDC. Supplied with power cord for 115 Volt operation; power cords for 6 VDC and 12 VDC available separately. Has attractive case for easy fixed station and mobile installation. Size 6" x 9" x 10" deep. Shpg. wt., 15 lbs.

- HE-460WX 5.00 Down Net 169.50
- HE-461 Power Cable for 6 Volt Operation Net 7.50
- HE-462 Power Cable for 12 Volt Operation Net 7.50
- HE-463 Transmit Crystal (Specify Channel or Frequency) Net 6.00
- HE-464 Receive Crystal (Specify Channel or Frequency) Net 6.00
- HE-465 Mobile Mounting Rack Net 12.50
- HE-466 Hi-Impedance Push-to-Talk Microphone Net 9.50

### VOCALINE

THE COMMAIRE ED-27 is a compact, highly efficient transceiver. The receiver section employs a double conversion superheterodyne circuit and emphasizes excellent sensitivity and selectivity. The transmitter section features at full 5 watt input and a high quality modulator. SPECIFICATIONS: Selectivity: ± 5 kc at points 6 db down. Sensitivity: 0.1 microvolts. Noise Immune. Patented squelch. Audio Output: 4.5 watts. Uses 10 tubes. Power Supply is transistorized. Power 115V AC and 6V DC or 115 V AC and 12V DC. Size: 5" x 9" x 7 1/2". Shpg. wt., 11 1/2 lbs. Complete with push-button microphone, short range antenna, crystals to operate on 27.105 mc. AC and DC line cords and mobile mounting brackets. HE-250WX 115 VAC/6 VDC 5.00 Down Net 143.60 HE-251WX 115 VAC/12 VDC 5.00 Down Net 143.60 Extra Crystal. Specify channel or frequency. HE-252 Net 3.60



kc @ 6 db down and 14 kc @ 60 db down. Image rejection: 40 db or better. Double conversion superheterodyne, 1st osc. xtal controlled-1st IF 10.7 mc—2nd osc. tuneable-2nd IF 455 kc. Adjustable carrier-operated squelch operates reliably at 5 uv or less. Adjustable carrier-controlled series-gate noise limiter AVC 2 watts audio output—4" Alnico V speaker. Easy to read calibrated slide rule dial. Controls: Tuning, squelch, on-off/vol. Transmitter Hand-held microphone with push-to-talk button Automatic modulation control 5 watts input power Two switch-selected transmit channels available. One channel factory aligned and crystal furnished—additional channel factory aligned for easy crystal installation if desired. Antenna matching over a range of 20-100 ohms. Crystal supplied for channel 11. General Power Supply: 115 V AC (CB-27) or 12 V DC (CBM-27). Power Consumption 30 watts (standby) 50 watts (transmit) Size: 4 1/2" x 6 1/2" x 8 1/2". Shpg. wt., 11 lbs. MODEL CB-27 Operates on 115 V AC. HE-488WX 5.00 Down Net 124.95 MODEL CBM-27 Operates on 12 V DC. HE-489WX 5.00 Down Net 124.95 Extra Crystals. Specify frequency or channel. HE-492 Eo. Net 2.95

### REGENCY

The CB-27 was designed to give complete flexibility of operation on the class D Citizens Band. TRANSMITTER section provides choice of two channels for interference-free transmission. Unit comes equipped with crystal for one channel. Unit is factory aligned on an additional channel. Other features: Double conversion, superheterodyne design, adjustable squelch, noise limiter, illuminated slide rule dial, AVC and crystal controlled first oscillator. Receiver Tuneable chan. 1-22. Sens. 2uv or better. Selectivity: —6



### JOHNSON VIKING MESSENGER FULLY ENGINEERED "INDUSTRIAL-TYPE" CITIZENS BAND TRANSCEIVER

Choice of 5 Channels at the flip of a switch. "More than just 2-way Citizen's Radio equipment" — the Viking Messenger is one of the very finest personal communications equipment available. Designed for reliability and easy installation in your home, business location, car, truck, or boat. Excellent receiver sensitivity and selectivity. Built-in Squelch, Automatic Volume Control, and Automatic Noise Limiter. Compact modern styling. Complete with tubes, push-to-talk high impedance ceramic microphone, and set of crystals for one channel. Crystals supplied will be for channel 1, 5, 7, 18 or 22 unless otherwise specified. 5 1/2" x 7" x 11 1/2" deep. Shpg. wt. 15 1/2 lbs. HE-447WX Model 242-128 For 115 VAC and 12 VDC 5.00 Down Net 139.75 HE-448WX Model 242-127 For 115 VAC and 6 VDC 5.00 Down Net 139.75 Crystals in Matched Pairs For Channels 1 thru 23 (Specify Channel) HE-449 250-901 thru 250-923 Per Pair Net 7.95



### GLOBE CB-100 COMPLETE TWO-WAY CITIZEN BAND STATION

5 watts input power to the final amplifier. Full AM modulation. Crystal tolerance .005%. The unit meets all FCC requirements. Same model operates on either 115V AC or 12V DC. Extremely compact and light weight. Size: 3 1/2" x 13" x 10". Shpg. wt., 11 lbs. MODEL CB-100 Complete with crystals for channel 11 and push-to-talk microphone. HE-600WX 5.00 Down Net 129.95 Optional Accessories for CB-100 External speaker with 15 ft. cord and plug. Shpg. wt., 5 lbs. HE-601 Net 6.95 12 Volt cable and plug, for mobile operation. HE-602 Net 2.75 Whip antenna, ADM Door mount HE-603 Net 3.95 Matched Crystals (specify frequency). HE-604 Net 5.90



The receiver section contains a 7-tube crystal controlled superheterodyne circuit with 3-channel selectivity. No tuning is necessary, channel selection with simple switch and illuminated jewel indicators channel in use. Highest receiver sensitivity and highest transmitter efficiency as no RF circuits are common to both receiver and transmitter. Rectifier circuit utilizes choke/capacitor high voltage filter system for extremely low AC hum level—such circuits found only in highest quality equipment. Very high image rejection due to 1680KC intermediate frequency. Excellent squelch circuit for quiet operation. Built-in limiter circuit permits mobile operation. The transmitter operates at the maximum allowable power.

### ELECTRO-VOICE RME MODEL 4303 CITIZENS PORTABLE TRANSCEIVER

Hand-held completely transistorized "walkie-talkie" type radio transmitter and superheterodyne receiver for short range communication in the 11 meter citizens band. Complies with Part 15 FCC Rules and Regulations and requires no license or permit. Excellent for sportman, surveyors, short-range industrial applications, etc. Employs 7 transistors and one diode. Complete with whip antenna, 2-6 volt batteries and crystal for channel 7. 9 1/2" x 3 1/4" x 1 1/2". Shpg. wt., 2 lbs. HE-620WX 5.00 Down Net 99.50 BA-109 Extra Burgess Z4 Battery (2 required) Shpg. wt., 4 oz. Net Ea. .63

No License or Permit Needed

**99.50**



### PHILMORE 11-METER CITIZEN'S BAND CLASS "D" TWO WAY RADIO KIT



3 CRYSTAL CONTROLLED TRANSMIT-RECEIVE CHANNELS FOR BUSINESS/HOME, COMMERCIAL, FARMS, BOATING. NO TESTS NOR SKILL REQUIRED FOR LICENSE; JUST FILL OUT FCC FORM ENCLOSED WITH KIT

for mobile operation taken from automobile cigarette lighter socket. Complete with 5 tubes, one crystal for any of the 3 channels incorporated, microphone, cabinet and appropriate power supply and power cord. Size 10" W x 4 1/2" H x 10 1/2" Deep. Shpg. wt., 12 lbs. Model TC11 For 115 Volt AC, less antenna HE-580 2.00 Down Net 39.95 Model TC612 For 6 and 12 Volt DC, less antenna HE-581 2.00 Down Net 44.49 Model TC15 7-Section Whip Antenna with base loading coil, for short range communication. HE-582 Shpg. wt., 2 lbs. Net 4.50 Extra Crystals. Specify channel or frequency. HE-830 Eo. Net 2.95

A new kit for the construction of a Citizen's Band Transceiver operating on the 11 meter frequencies recently allocated by the F.C.C. for use by any U.S. citizen. Designed so that anyone can build it without previous electronic knowledge or skill. Any 3 desired channels may be automatically switch-selected on front panel, insuring interference-free communication at all times. Receiver and transmitter individually tuned to pre-arranged frequencies. Transmitter crystal controlled with .005% accuracy, and delivers maximum wattage permitted by FCC. Sensitive superregenerative receiver will pick up signals from the furthest limits of transmitter range. Has built-in trap to eliminate T.V. interference. Mobile unit operates on 6 or 12 volts DC interchangeably. Low, flat, modern appearance makes it ideal for home, office or mobile use. Power

### ANOTHER LAFAYETTE SCOOP!

A TERRIFIC BUY FOR THE 24-50MC MOBILE AMATEUR AND FOR THE 27 MC (11 METER) CITIZEN BANDER. COMPLETE — ALL IN ONE —

- PROFESSIONAL-SIZE ALUMINUM SWIVEL BASE PERFORMANCE PLUS
- SPECIALLY STYLED CADMIUM PLATED PROOF SPRING PLUS
- 96" STAINLESS STEEL WHIP WITH REMOVABLE PLATED STEEL ADAPTOR

Regularly Priced at 14.95

ALL THREE YOUR PRICE **8.75**

Swivel ball mount base designed to be mounted on any surface. Spring holds rod in properly adjusted position and prevents rod damage from shocks and blows. Stainless steel whip made of special alloy for maximum resiliency and strength. Shpg. wt., 5 lbs. SP-156WX Net 8.75



### FREE!

LIMITED TIME ONLY!

FREE 11 METER CITIZEN BAND ANTENNA WITH PURCHASE OF CITIZEN BAND TRANSCEIVER

APPLIES TO: ONLY ANY ONE OF THE FOLLOWING:

- HE-250WX, HE-251WX
- HE-447WX, HE-448WX
- HE-460WX, HE-488WX
- HE-489WX, HE-527WX
- HE-528WX, HE-529WX

HE-537WX and HE-600WX

- HE-670WX Ground Plane Antenna Regular Price 15.63
- HE-674WX Mobile Rear Mount Antenna Regular Price 18.52
- HE-678WX Rear Bumper Mount Antenna Regular Price 17.25

### 48" CITIZEN BAND TELESCOPING ANTENNA

**.79**

Ideal for mobile or fixed transceivers, miniature portable and pocket transistor radios, and a host of similar applications. The 4 section antenna is made of chrome-plated brass and plugs into a jack. Measures 48" fully extended and retracted is 11" to facilitate carrying in pocket. Complete with a flexible plastic case with slip-under protecting flap. Shpg. wt., 8 oz. F-440 Net .79

### INTERNATIONAL CRYSTAL NEW 1960 CLASS "D" CITIZEN BAND CALL AND HANDBOOK

Approximately 50,000 up-to-date names, addresses and call numbers by district. Also includes: FCC rules and regulations, Radio District Map, Radio messages, and call code, and available authoritative construction officials for citizen banders. HE-1320 Postpaid in USA Net 3.95



FOR EASY PAY PURCHASE USE THIS SIDE AFTER FILLING IN MERCHANDISE ON REVERSE SIDE.

**RETAIL INSTALLMENT CONTRACT**

MINIMUM ORDER \$20.00 TOTAL CASH PRICE —

**DOWN PAYMENTS** \$2.00 on Orders from \$20 to \$50  
\$5.00 on Orders from \$50 to \$200  
\$10.00 on Orders Above \$200

ADDITIONAL PURCHASES: Once you establish credit, you can "add-on" to your account with purchases of \$20.00 or more. No down payment required on "add-ons" or reopened accounts for less than \$100.00. Just list the items you want on the order blank, write "add to my account" and give your account number. Make certain you sign the Easy Payment Agreement.

Before filling out amounts see EASY PAY PLAN SCHEDULE and example. Figure your sums first on separate paper to avoid errors. USE INK. DO NOT ERASE OR CROSS OUT.

NOTICE TO THE BUYER: 1. Do not sign this agreement before you read it or if it contains any blank space. 2. You are entitled to a completely filled in copy of this agreement. 3. Under the law, you have the right to pay off in advance the full amount due and under certain conditions to obtain a partial refund of the credit service charge.

LAFAYETTE RADIO ELECTRONICS CORPORATION (SELLER)  
165-08 LIBERTY AVE., JAMAICA 33, N. Y.

sells and buyer purchases merchandise as described on reverse side hereof to be kept in good repair and unencumbered at buyer's stated address. Seller shall retain title to and right to possession of merchandise until fully paid. Upon default of any payment or payments seller may declare entire unpaid balance due at once and may also repossess merchandise retaining previous payments as compensation for the use thereof. If proceeds of resale of merchandise are insufficient to cover buyer's obligation, buyer will pay the deficiency to seller; if proceeds result in overage, seller will pay such overage to buyer. Payments will be made to the place and/or to any party designated by the seller in writing.

LAFAYETTE RADIO ELECTRONICS CORPORATION (SELLER)

By \_\_\_\_\_ **BUYER SIGN HERE** Signed \_\_\_\_\_

Buyer's Copy Mailed—Date \_\_\_\_\_  
By \_\_\_\_\_

FOR OFFICE USE ONLY  
Account Number \_\_\_\_\_

(Please Print)  
Name \_\_\_\_\_  
Present Home Address \_\_\_\_\_  
City \_\_\_\_\_ Zone \_\_\_\_\_ State \_\_\_\_\_  
How Long At This Address \_\_\_\_\_ Telephone \_\_\_\_\_

To fill in spaces below correctly refer to EASY PAY PLAN Schedule on this sheet and note example.

- Total Cash Price\*
- Sales Tax (if any)
- Total (items 1+2)
- Down Payment See Down Payment Schedule
- Unpaid Balance (item 3 minus item 4)
- Credit Service Charge (See EASY PAY Schedule)
- EASY PAY BALANCE (Add items 5+6)

**EXAMPLE** (Standard Terms)  
If Item (5) Unpaid Balance = 106.50  
Item (6) Credit Service Charge = 11.00  
Item (7) EASY PAY Balance = 117.50  
Your Monthly Payment (See Schedule) is 10.00  
You will pay \$10.00 for 11 months or 110.00  
And your FINAL Monthly payment will be 7.50

Buyer agrees to pay \$ \_\_\_\_\_ each month beginning one month after shipment for \_\_\_\_\_ months and a FINAL Monthly payment of \$ \_\_\_\_\_

EASY PAY ORDERS SENT SHIPPING CHARGES COLLECT. DO NOT INCLUDE SHIPPING CHARGES.

**RETAIL INSTALLMENT CONTRACT**

(L.S.) DATE \_\_\_\_\_

**NEW "EASY PAY PLAN" PAYMENT SCHEDULE**

If Unpaid Balance Is	Standard Terms		Extended Terms		If Unpaid Balance Is	Standard Terms		Extended Terms		If Unpaid Balance Is	Standard Terms		Extended Terms	
	Credit Service Charge	Monthly Payment	Credit Service Charge	Monthly Payment		Credit Service Charge	Monthly Payment	Credit Service Charge	Monthly Payment		Credit Service Charge	Monthly Payment	Credit Service Charge	Monthly Payment
Up to 20.00	2.00	5.00	AVAILABLE ONLY		100.01 - 110.00	11.00	10.00	15.00	6.00	225.01 - 250.00	25.00	16.00	38.00	12.00
20.01 - 30.00	3.00	5.00	ON ORDERS WITH		110.01 - 120.00	12.00	10.00	17.00	6.00	250.01 - 275.00	27.50	17.00	42.00	14.00
30.01 - 40.00	4.00	5.00	UNPAID BALANCES		120.01 - 130.00	13.00	10.00	19.00	7.00	275.01 - 300.00	30.00	19.00	45.00	15.00
40.01 - 50.00	5.00	5.00	OVER \$50.00		130.01 - 140.00	14.00	11.00	21.00	7.00	300.01 - 350.00	35.00	21.00	51.00	17.00
50.01 - 60.00	6.00	6.00	7.00	5.00	140.01 - 150.00	15.00	12.00	23.00	8.00	350.01 - 400.00	40.00	24.00	58.00	19.00
60.01 - 70.00	7.00	7.00	8.00	5.00	150.01 - 160.00	16.00	12.00	24.00	8.00	400.01 - 450.00	45.00	27.00	66.00	22.00
70.01 - 80.00	8.00	7.00	9.00	5.00	160.01 - 180.00	18.00	13.00	27.00	9.00	450.01 - 500.00	50.00	30.00	73.00	24.00
80.01 - 90.00	9.00	8.00	11.00	5.00	180.01 - 200.00	20.00	14.00	30.00	10.00	On orders over \$500.00 send down payment of \$10.00 or more. Credit service charge and payments will be in proportion to amounts shown on schedule for Standard Terms. Extended Terms available if desired.				
90.01 - 100.00	10.00	9.00	13.00	5.00	200.01 - 225.00	22.50	15.00	34.00	11.00					

For purpose of receiving credit for above EASY PAY PLAN purchase, the buyer makes the following representation.

With Whom Living  Parents  Spouse  Alone  Landlord's Name and Address \_\_\_\_\_

Home Address  Permanent  Previous (Check which) \_\_\_\_\_

Age (Must Be Over 21) \_\_\_\_\_ Single  Married  Divorced  Name of Spouse \_\_\_\_\_

Spouse Employed By \_\_\_\_\_ (Address) \_\_\_\_\_ Salary \_\_\_\_\_

Draft Classification \_\_\_\_\_ Reserve Status \_\_\_\_\_ Have you bought from Lafayette before? Yes  No  On Time Payment? Yes  No  If yes, please give your Lafayette Time Payment Account Number. No. \_\_\_\_\_

Real Estate Holdings—Address \_\_\_\_\_ City \_\_\_\_\_ State \_\_\_\_\_

Recorded In Name of \_\_\_\_\_ Present Value \$ \_\_\_\_\_ Mortgage \$ \_\_\_\_\_

Name Present Employer \_\_\_\_\_ If self-employed, so state \_\_\_\_\_ Tel. No. \_\_\_\_\_ Position Bodge No. \_\_\_\_\_ Salary \_\_\_\_\_ How Long (Years) \_\_\_\_\_ (Months) \_\_\_\_\_

Business Address \_\_\_\_\_ Any Other Income \_\_\_\_\_ Source \_\_\_\_\_ \$ \_\_\_\_\_ How Long (Years) \_\_\_\_\_ (Months) \_\_\_\_\_

Name Former Employer \_\_\_\_\_

Bank Account With \_\_\_\_\_ Savings  Checking  (Address) \_\_\_\_\_

First Trade Reference \_\_\_\_\_ (Address) \_\_\_\_\_ Highest Credit \$ \_\_\_\_\_ Still Owning \$ \_\_\_\_\_ Monthly Payment \$ \_\_\_\_\_

Second Trade Reference \_\_\_\_\_ (Name) \_\_\_\_\_ (Address) \_\_\_\_\_ (City and State) \_\_\_\_\_ Highest Credit \$ \_\_\_\_\_ Still Owning \$ \_\_\_\_\_ Monthly Payment \$ \_\_\_\_\_

Third Trade Reference \_\_\_\_\_ (Name) \_\_\_\_\_ (Address) \_\_\_\_\_ (City and State) \_\_\_\_\_ Highest Credit \$ \_\_\_\_\_ Still Owning \$ \_\_\_\_\_ Monthly Payment \$ \_\_\_\_\_

Nearest Relative \_\_\_\_\_ (Name) \_\_\_\_\_ (Address) \_\_\_\_\_ (City and State) \_\_\_\_\_

Name \_\_\_\_\_ (DO NOT LIST THOSE WITH WHOM YOU RESIDE) Address \_\_\_\_\_ Relationship \_\_\_\_\_

IMPORTANT: Please sign this form before mailing. Be sure to give age. (Must be over 21)

CUT ALONG DOTTED LINE

**HOW TO BUY ON NEW EASY TERMS**

To order the merchandise you want to buy on Easy Terms, use your Lafayette order blank. Turn to the reverse side and fill in the contract, using the example shown as a guide. Blank the amount shown in the EASY PAY PLAN SCHEDULE for either the STANDARD or the EXTENDED terms, depending upon which terms you are choosing. Do not fill in the space indicating sales tax unless delivery is to be made in New York City. Supply the answers to all the questions below the contract, which must be filled in correctly and signed before we can process your order. Be sure to give complete names and addresses of all references on your list. Attach the remittance covering your down payment, and mail your order. As soon as your credit is approved, your order will be shipped. Your first payment is not due until 30 days after shipment. Lafayette has made this plan as simple and confidential as possible.

— NO RED TAP: Any responsible person over 21 with a steady source of income can get credit. Lafayette's Easy Pay Plan is available to all residents of the United States. It cannot be applied to shipment to U.S. possessions or territories, to A.P.O. or F.P.O. addresses, or to foreign countries.

**REFUND OF SERVICE CHARGES FOR ADVANCED PAYMENT**

All credit service charges will be refunded if payment is completed within 60 days of shipment. Take the full time to pay if you wish. However, you may pay off your account at any time and obtain a partial refund of the credit service charge.

**ADDITIONAL PURCHASES**

Once you have established credit with Lafayette you can "add-on" to your account with any purchase of \$20.00 or more. No down payment is required on either "add-on" or reopened accounts for purchases of less than \$100.00. You simply list the items wanted on the order blank, write "add to my account," and give your account number. Make certain that you sign the Easy Payment Agreement below.

**Take Advantage of these new EASY PAY Features TODAY**

- ★ **New Lowest Down Payments**  
Only \$2.00 Down on orders from \$20 to \$50  
Only \$5.00 Down on orders from \$50.01 to \$200  
Only \$10.00 Down on orders over \$200
- ★ **Longer Repayment Period**  
New Optional Extended Easy Pay Terms permit payments up to 24 months.
- ★ **It's Easy To Open A Lafayette Account**  
Fast — Economical — Confidential
- ★ **Immediate Handling**  
Orders shipped immediately upon approval of credit
- ★ **Simplified "Add-On" Purchases**  
No Down Payment For "Add-On" Purchases of less than \$100.00

Lafayette **NEW! EASY PAY PLAN TERMS...** Makes it Even Easier for YOU to BUY NOW

**IT'S SIMPLE TO OPEN AN ACCOUNT — CHOOSE EITHER STANDARD OR EXTENDED TERMS**

Lafayette's Easy Pay Plan enables you to order on new easier terms the equipment you want now even if you are short of ready cash. This sensible plan permits you to pay out of future earnings — and at the lowest carrying charges! You can buy whatever you please under this plan, including High Fidelity Systems; individual Hi-Fi units and accessories; Test Equipment; Kits; Public Address and Intercom Equipment; Amateur Gear; Power and Hand Tools; Phonographs and Record Changers; Telescopes, Binoculars and Photographic Equipment; Books and Manuals; etc.

**TERMS OF LAFAYETTE'S NEW EASY PAY PLAN**

Minimum Order . . . . . Orders must have a total cash value of . . . . . \$20.00 or more.  
Down Payment . . . . . Only \$2.00 down on orders from . . . . . \$20 to \$50.  
Only \$5.00 down on orders from . . . . . \$50.01 to \$200.  
(Larger down payments reduce the service charges and monthly payments)

**Service Charge: Monthly Payments:**

You may choose either the Standard or the Extended plan to obtain the lowest service charges for the greatest length of time.

You can make your monthly payments under standard or extended terms shown in the new easy payment table. The extended terms permit smaller monthly payments over a larger period, up to 24 months. When ordering, please indicate in the space provided on the order blank, your choice of standard or extended terms.

**ON ORDERS AS LOW AS \$20!**



# LAFAYETTE

## PROFESSIONAL QUALITY


### AMATEUR COMMUNICATION

# RECEIVER

**KT-200**  
IN KIT FORM  
**64.50**  
5.00 DOWN

**HE-10**  
WIRED AND TESTED  
**79.95**  
5.00 DOWN

#### SUPERHETERODYNE CIRCUIT UTILIZING 8 TUBES & RECTIFIER TUBE

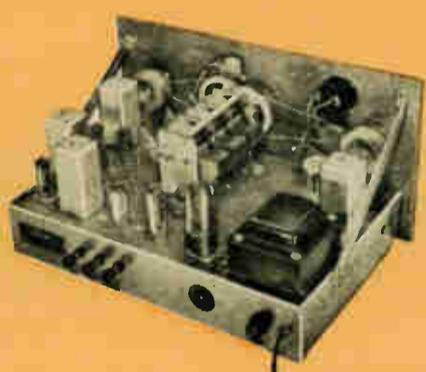

- BAND SPREAD FOR EASY TUNING
- BUILT-IN "S" METER WITH ADJUSTMENT CONTROL
- EXCELLENT SELECTIVITY
- ACCESSORY POWER SOCKET PROVIDED
- ALL TRIMMERS PRE-ALIGNED
- COVERS 455KC. to 31MC. IN FOUR BANDS
- VARIABLE BFO AND RF GAIN CONTROLS
- BUILT IN PRE-CALIBRATED "S" METER
- SWITCHABLE AVC & AUTOMATIC NOISE LIMITER
- ALL MAJOR COMPONENTS PRE-MOUNTED
- DUAL 4 AND 8 OHM OUTPUT IMPEDANCES

High sensitivity superheterodyne circuit utilizes 8 miniature tubes plus rectifier tube and transformer input, full wave rectifier. The 80-40-20-15 and 10 meter amateur bands are clearly indicated on the illuminated dial face, and can be easily tuned with the pre-calibrated band spread. The receiver has complete band switching, thus eliminating the need for bothersome plug-in coils. Band spread is laid out on easy-to-read 0-100 scale, and features a weighted control knob which offers smooth, precise tuning. Coverage of from 455 KC to 31 MC is obtained through the use of four switchable ranges (455-1600 KC/1.6-4.8 MC/4.8-14.5 MC/10.5-31 MC). All controls, switches and phone jack are located on the front panel.

Receiver sensitivity is 1.25 microvolts for 10 DB signal to noise ratio. Selectivity is -60DB at 10 KC image rejection is -40DB at 3MC. Panel is grey metal with white lettering, and controls are black with aluminum trim. Hinged top makes inside of receiver readily accessible to operator. 7 7/8" H x 15" W x 9" D. Tubes: 3-6BD6, 2-6BE6, 2-6AR5, 1-5Y3. Shpg. wt., 22 lbs.

KT-200WX ..... 5.00 Down ..... Net 64.50  
HE-10WX Same as above, factory  
wired & tested ..... 5.00 Down ..... Net 79.95

#### NEW NATIONAL NC-60 SPECIAL

"A"



National's new all-wave low-priced receiver which features continuous coverage of AM Broadcast, Amateur and World Wide Short Wave Bands; brilliantly styled by Peter Quoy Yang for easy operation, ready reading and attractive decor. Features include: 4 separate bands - 540 Kc-1600 Kc; 1.6-4.5 Mc; 4-12 Mc; 10.5-31 Mc with police, CD, marine, aircraft, amateur, etc. stations clearly marked; plus 0-100 logging and bandspread scale. Bandspread operative, on all bands. Audio section drives built-in speaker for front panel phone jack. Has AM, CW switch, standby-receive switch, 2 degrees of selectivity, complement of 4 tubes plus rectifier superheterodyne circuit. Finish is two tone black and gray enamel. Size: 7 1/2" x 8" x 13 1/2". Shpg. wt., 15 lbs.

HE-200WX ..... 5.00 Down ..... Net 59.95

#### FREE WITH PURCHASE OF NC-60!

SHORTWAVE ANTENNA KIT - Complete antenna kit for 30 ft. installation. Shpg. wt. 2 lbs.

Plus

MATCHING EARPHONES - For efficient portable listening. Shpg. wt. 1 lb.

NC-60 receiver, ant. kit and earphones, shpg. wt., 18 lbs. SP-157WX ..... 5.00 Down ..... Net 59.95

#### NATIONAL NC-109 RECEIVER

"C"



National's general coverage receiver for CW, AM and SSB reception that incorporates many features of their most expensive types but still sells at a low price. These exclusive features are "Microtune" crystal filter in IF section for 5 different degrees of selectivity; sharp phasing network over 60 db deep for interference rejection; separate product detector for CW and SSB reception; mode selector switch includes accessory position for crystal calibrator or phono input. Coverage is from 540 Kc-40 Mc on 4 bands, with bandspread scales for special amateur bands, all clearly marked; logging scale included. Conelrad (CD) points clearly marked. Size 16-13/16" x 10" x 10 1/2". Shpg. wt., 35 lbs.

HE-203WX ..... 5.00 Down ..... Net 169.95  
NC-109XCU. Plug-in crystal calibrator. Shpg. Wt., 2 lbs.  
HE-206 ..... 2.00 Down ..... Net 20.95  
NFM-83-60 N.F.M. Adaptor. Shpg. Wt., 5 lbs.  
HE-207 ..... 2.00 Down ..... Net 33.95

#### FREE WITH NC-109 RECEIVER!

NATIONAL NIS-1 MATCHING SPEAKER - Regular 17.50 Value

(This Offer Good For Life of This Catalog)  
SP-158 WX - NC-109 and NIS-1 ..... 5.00 Down 169.95

## FREE! VALUABLE GIFTS

WITH PURCHASE OF YOUR SHORT WAVE and HAM GEAR  
(OFFER GOOD UNTIL APRIL 1, 1960)



EARPHONES



AERIAL KIT

REGULAR PRICE 3.11



CODE COURSE



KEY

REGULAR PRICE 4.19

FREE WITH "C"



SPEAKER  
NATIONAL NTS-1  
REG. PRICE 17.50  
HALLICRAFTERS R-48  
REG. PRICE 19.50

FREE WITH "D"



"BUG"

REGULAR PRICE 9.95

#### "A" HALLICRAFTERS



MODEL S-38E  
NEW LOW COST RECEIVER

Hallcrafters' economy model SWL receiver pulls in everything on its highly sensitive AC-DC superhet circuit: 4 tubes plus one rectifier, with 5" P.M. speaker delivering 2 watts audio. Has tip jacks for phones, standby-receiver switch AM-CW switch for talk or code. COVERAGE: 4-BANDS: Standard Broadcast and 3-SW bands ranging from 1650 Kc-32MC. Features large Overseas Dial, with specific foreign stations dated 0-100 separate bandspread dial. Also covers police, aircraft, ship-to-shore and all amateur bands. Operates on 105-125 DC or 60 cycle AC. Size 12 1/2" x 7" x 7 1/2". Comes in attractive gray steel cabinet with silver frame trim. Shpg. wt., 14 lbs.

HE-100 ..... 5.00 Down ..... Net 59.95  
MODEL S-38EM Receiver with mahogany over metal finish.  
HE-101 ..... 5.00 Down ..... Net 59.95  
MODEL S-38EB Receiver, with blond over metal finish.  
HE-102 ..... 5.00 Down ..... Net 59.95

#### FREE WITH PURCHASE OF S38E! SHORTWAVE AERIAL KIT, KT-77

Reg. Price 1.05

plus MATCHING EARPHONES FOR PRIVATE LISTENING HE-30 ..... Reg. Price 2.05

SP-165 S38E plus KT-77 plus HE-30 Shpg. Wt., 18 lbs. 5.00 Down ..... Net 59.95

#### MODEL SX-110 AMATEUR-SWL RECEIVER

"C"



Superheterodyne receiver covers 540 KC (broadcast band) to 34 MC in four bands. Features slide rule type dial and electrical bandspread over the 10, 15, 20, 40 and 80 meter amateur bands. Separate bandspread tuning condenser. Switchable crystal filter and built-in "S" meter. All controls are on front panel, and include main and band spread tuning, AM-CW switch, sensitivity, BFO pitch, on/off/tone, volume, receiver-standby, selectivity, crystal filter-phasing, noise limiter, and headphone jacks. Receiver uses either 3.2 or 500 ohm speaker. Antenna may be doublet, single-wire, ground phone or beam type. Utilizes seven tubes plus one rectifier 6SG7, first IF amp, 6SK7 second IF amp, 6SC7 BFO and audio amp, 6K6GT, audio output, 6H6 AN L-AVC-detector, 5Y3 rectifier. Output: 2 watts. Grey steel cabinet with chrome trim. Size: 18 1/2" W x 8" H x 10 1/4" D. 117 AC. Shpg. wt., 32 lbs.

HE-108WX ..... 5.00 Down ..... Net 159.95

#### FREE WITH SX-110 PURCHASE!

HALLICRAFTERS R-48 MATCHING SPEAKER HE-113 ..... Reg. Value 19.95

SP-166 WX HE-108 WX plus HE-113 Shpg. Wt., 42 lbs. 5.00 Down ..... Net 159.95



E. F. JOHNSON  
"ADVENTURER"  
CW-TRANSMITTER

"B"

Loaded with features for both novice and experienced amateur, the new Viking "Adventurer" kit is a completely self-contained, single knob bandswitching and effectively TVI suppressed transmitter. The "Adventurer" operates crystal or external VFO control. The RF lineup consists of a 6AG7 oscillator/multiplier and an 807 power output tube. Front panel meter switching monitors final grid or plate currents—clean and crisp break-in keying is accomplished by breaking both oscillator and final amplifier circuits simultaneously. Size: 10 1/2" x 8 1/2" x 7 1/2". Shpg. wt., 19 lbs.

MODEL 240-181-1 Above in kit form. With tubes. HE-423WX ..... 5.00 Down ..... Net 54.95  
MODEL 250-40 Speech amplifier/Modulator kit for Adventurer. With tubes. Shpg. wt., 1 lb. Net 12.25  
HE-444

#### FREE WITH PURCHASE OF "ADVENTURER" KIT HE-423 WX!

LAFAYETTE PR-13 CODE COURSE PLUS LAFAYETTE MS-319 KEY ..... Reg. Value 4.79

SP-162 WX HE-423 WX plus PR-13 plus MS-319 Shpg. Wt., 22 lbs. 5.00 Down ..... Net 54.95



"CHALLENGER"  
80 THROUGH  
6 METER  
TRANSMITTER

"D"

The new Viking "Challenger" is ideal for the novice or experienced amateur for fixed station, emergency, portable, or field day use! A full size transmitter with three RF stages, the "Challenger" is designed for fast, easy tuning, excellent stability, and plenty of reserve drive! Instant bandswitching 80 through 6 meters—70 watts phone input—120 watts CW input 80 through 10 meters and 85 watts CW input on 6 meters! Straight through final amplifier operation even on 6 meters provides excellent efficiency and modulation characteristics. Size: 13 1/2" x 10-1/16" x 9 1/2". Shpg. wt., 28 lbs.

MODEL 240-182-1 Above in kit form. With tubes. HE-424WX ..... 11.50 Down ..... Net 114.75  
MODEL 240-182-2 Above wired and tested. With tubes. HE-425WX ..... 15.50 Down ..... Net 154.75

#### FREE WITH PURCHASE OF "CHALLENGER" TRANSMITTER!

LAFAYETTE MS-435 BUG! ..... Reg. Value 9.95

SP-163 WX HE-424 WX Kit, plus MS-435 Bug Shpg. Wt., 32 lbs. Net 114.75  
SP-164 WX HE-425 WX Wired, plus MS-435 Bug Shpg. Wt., 32 lbs. 5.00 Down ..... Net 154.75





# IT'S A WINNER!

## NEW LAFAYETTE "tiny" 6 Transistor Radio!



### SENSATIONAL PERFORMANCE in a Small Package!

- 6 ULTRA-MODERN TRANSISTORS PLUS GERMANIUM DIODE
- VEST POCKET SIZE—ONLY 4" H x 2 1/2" W x 1 1/4" D
- EARPHONE JACK BUILT IN FOR PRIVATE LISTENING
- FULL TONE DYNAMIC SPEAKER • TROUBLE-FREE PRINTED CIRCUIT
- BUILT-IN FERRITE BAR ANTENNA • SUPERHETERODYNE CIRCUIT
- RUGGED PLASTIC CASE • ECONOMICAL—USES ONLY ONE BATTERY

Engineered and constructed with the jewel like precision of a fine watch . . . true superhet circuit with push-pull audio output powers either the built-in dynamic speaker or the personal-type earphone. The trouble-free printed circuit utilizes six ultra modern transistors plus germanium diode. Super sensitive . . . built-in ferrite-rod antenna brings in distant stations like locals. High on power, low on battery drain . . . employs single long-life standard 9 volt battery for economical service. Housed in smartly designed black and gold case of rugged, durable plastic. Soft leather carrying case with attached earphone pouch. "On-off" volume control plus large easy to read tuning dial. Covers 550-1600Kc. Just 4" H x 2 1/2" W x 1 1/4" Thick and weighing a mere 10 ounces—a true purse/pocket portable. Lafayette "Tiny" 6-Transistor Radio—including battery, carrying case, and earphone for personal listening . . . all at an unbelievably low price! Shpg. wt., 2 lbs. FS-206 "Tiny" 6-Transistor Radio . . . Net 24.95



### USE YOUR "TINY" TRANSISTOR RADIO AS A CORDLESS HOME TABLE RADIO

Just think . . . simply by combining this handsome speaker unit with your FS-206 "Tiny" Transistor Radio, you have an attractive Cordless Transistor Table Radio. The large 4" speaker provides a sound quality that is equal or superior to the best table radios. Beautifully styled and finished in an attractive cherry mahogany wood, this unit is perfect for use anywhere in your home . . . an excellent table radio or simply by unplugging the FS-206 you have a pocket size portable. Size: 8" H x 10 1/2" L x 4" D. Shipping weight 4 lbs.

SK-144 Cordless Radio Enclosure . . . Net 6.95

### THE PERFECT COMBINATION

Lafayette FS-206 "Tiny" Transistor Radio and SK-144 Cordless Radio Enclosure. Shipping weight 6 pounds. FS-206 2.00 Down \$29.95

## 29.95



REGULAR \$48.50

## 24.95

2.00 Down INCLUDING EARPHONE BATTERY AND CARRYING CASE

ENCLOSURE ONLY 6.95

### LAFAYETTE "B" BATTERY ELIMINATOR and CHARGER for TRANSISTOR RADIOS



## 2.95

This simple "B" battery and eliminator has provision for replacing snap terminals on all 9-volt transistor batteries. Now when indoors you can operate your portable transistor set on regular 110V AC house current without using up your expensive "B" battery. . . . Best of all you may also recharge your used battery for many extra hours of use. Complete with AC cord and assorted snap terminals to fit all 9-volt transistor batteries. Size: 3 1/2" W x 3 3/4" H x 2 1/2" D. Shpg. wt., 1 lb. F-481 . . . Net 2.95



### FANTASTIC SAVINGS! 68% OFF! FAMOUS GE GC-7 DIAMOND STEREO CARTRIDGE

## 7.49

REGULAR CATALOG PRICE \$23.47

Lafayette shatters cartridge prices with this stereo buy of the year. For less than the price of the diamond needle alone you can have the famous General Electric magnetic GC7 (1.7 MIL) diamond stereo cartridge. Ideal as a replacement cartridge, for conversion to stereo—or at this low price, buy it as a spare cartridge. Frequency response is 20-17,000 cycles. Features high channel separation and excellent compliance with low record and stylus wear. These are genuine GE GC-7 diamond needle cartridges backed up by both the GE and famous Lafayette guarantees. General Electric GC-7 (1.7 MIL) Diamond Stereo Cartridge. Shpg. wt., 1 lb. P.K.437 . . . Net 7.49

## Sensational LAFAYETTE f1.8 TRIPLE TURRET 8mm MOVIE CAMERA

### MORE CAMERA for the Money than any Other



✓ CHECK the features!

✓ Then CHECK the PRICE!

## 29.95

Comparable Value 59.50

- 3 Fast f 1.8 Lenses. • 4 Speeds—including Slow Motion. • Single Frame Exposure. • "Combo-View" finder—for normal, wide angle and telephoto areas. • "Drop in" Spool Loading. • Built-in Exposure Guide. • Die Cast Aluminum Body. • Slide Rule Footage Indicator.

Truly modern—truly versatile—and truly inexpensive! Lafayette's "8-T3" puts movie-making in the snap-shot class. Fast f 1.8 lenses—normal wide angle and telephoto for fine color movies even in dim light. Fixed focus on all three—never needs "fumble-focusing." Single dial exposure setting—for all three lenses. Positive lock turret switch from normal to telephoto to wide angle—in an instant. Even beginners get perfect movies every time. The lensatic optical viewfinder frames

the area for each separate lens. "Drop-in" spool loading—easy and economical—makes reverse loading an impossibility. All lenses recessed in their own sun-shades. Four aperturing speeds plus single frame exposure for trick effects. Heavy duty—governor controlled—spring wind motor. The "8-T3" offers more for less money—than any other 8mm movie camera. Shpg. wt., 3 lbs. F-470 Camera only 2.00 Down—Net 29.95 F-469 Leather Case for "8-T3" 8 oz. . . . Net 2.95

### NEW! Cine "X" Meter

- Mounts on Turret!
- Fast! Easy! Direct Reading!
- Accurate - Versatile - Compact



## 7.75

Designed specifically for movie camera owners. Direct reading—nothing to remember—correct exposure shown in 1/3 stops. Any "turret" camera becomes a camera with "built-in" exposure meter. Just remove a lens not in use and attach the Cine "X" Meter. Aim your camera—read exposure—and shoot! Calibrated for exposure from f11 to f32 ASA index from 6 to 200. Eliminates mental conversion when using filters. Just phase filter in Cine "X" Meter for reading to use when filter is on lens. Perfect color temperature sensitivity—accurate exposures—even in poor light. Can be hand held or hung on chain. Includes sun shade, dust cap, adaptor and instructions. Shpg. wt., 8 oz. F-499 . . . Net 7.75

## Matched MOVIE OUTFIT

- Matched to Take MOVIES—Show MOVIES
- Unmatched in PRICE and VALUE!

- Dollars below the regular price! • Includes New Cine "X" Meter!

## 86.99

Everything you need for movie making and showing fun. No need to "shop" for unmatched equipment—no need to pay more for fine home movies. You get all this: Lafayette's f1.8 Triple Turret 8mm Movie camera . . . Holiday M-1000 500 watt projector . . . 30" X40" glass beaded folding tripod screen . . . 2 light bar . . . camera case . . . 2 400' reel cans . . . Cine "X" Electric Eye light meter. Unbeatable for foolproof shooting and showing of indoor and outdoor movies. Shpg. wt., 30 lbs.

F-540 5.00 DOWN Net 86.99

30" X40" glass beaded folding tripod screen Shpg. wt., 10 lbs. . . . Net 9.75

F-536 2 light bar—holds still or movie cameras 6 ft. cord. Shpg. wt., 1 1/2 lbs. . . . Net 2.50

F-537 300 watt Reflector type photo-flood bulbs. Shpg. wt., 1 lb. . . . Net, ea. .95

F-539 400' 8mm Reel and Can. Shpg. wt., 14 oz. . . . Net .95

F-538 . . . Net .95

## NEW! STATIC ELECTRICITY LAB

50 Fascinating Experiments! Far Age 10 Up

## 2.95



This inexpensive lab kit is not only entertaining, but it actually teaches the basic principles of static electricity. Perfect for the science minded youngster. Absolutely safe, equipment includes new plastic materials which make possible dramatic effects. Complete with 48 page Discoveries in Static Electricity. Shpg. wt., 2 lbs. KT-168 . . . Net 2.95

## NEW! CALCULO ANALOG COMPUTER KIT

Illustrates The Fundamental Principles of Math & Physics



For Age 12 Up

## 16.95

Provides a clear understanding of the basic computer principles. Easily assembled in approximately 3 hours without soldering. Uses only 2 flashlight batteries. Teaches mathematics, physics and mechanical drawing; does multiplication, division, powers, roots, compound interest and many more. Supplied with simple assembly manual and 48-page booklet illustrating various experiments. Shpg. wt., 2 lbs. KT-169 . . . Net 16.95

# A LAFAYETTE BEST BUY! 8mm Triple Turret Camera with Built-in Electric Light Meter




only **39.50**

- BUILT-IN, DIRECT-READING, ELECTRONIC EXPOSURE METER
- 3 FAST, FIXED-FOCUS F1.8 LENS
- 4 SPEEDS INCLUDING SLOW MOTION
- SINGLE FRAME EXPOSURE FOR SPECIAL EFFECTS
- "COMBO-VIEW" FINDER—NORMAL, WIDE-ANGLE, TELEPHOTO

COMPARES WITH 59.95 MODELS

Now, for the first time, a professional-style camera at a beginner's price. Features a built-in photo-electronic exposure meter that eliminates all guesswork—all you do is aim the camera, the meter tells you automatically what lens setting to use, and then you shoot. Choose from 3 fast f1.8 lens—normal, wide-angle or telephoto with each lens recessed in its own sun shade. There is a fixed focus on all three lens—no need for "focus-fumbling." You can instantly switch from normal to telephoto to wide angle on the positive lock turret that prevents any slipping. A single dial exposure setting operates for all three lenses. The

lensatic optical viewfinder has three different frame areas—one for each lens. Four operating speeds, including slow motion, lets you film all activities. Single frame exposure for trick-effects. Slide rule footage indicator tells you exactly how much film is left in camera. Drop-in spool loading is easy and economical—impossible to reverse load. Heavy-duty governor controlled, spring wind motor in a sturdy, die cast aluminum body. Shpg. wt. 3 lbs.  
 F-547 ..... 2.00 down ..... Net 39.50  
 F-548 Leather case for F-547 ..... Wt. 8 oz. .... Net 2.95

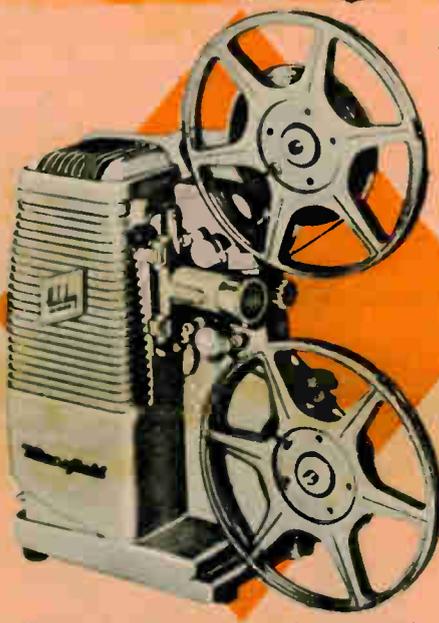

## "HOLIDAY M-1000" 500 Watt 8mm Movie Projector

**37.95**

- 500 watts—Sparkling Clear and Sharp!
- Swing out gate—Easy Loading!
- High Intensity Blower Cooled!
- Coated 3/4" f1.6 lens!
- 400 ft. Reel Capacity!
- All Aluminum—Die Cast Construction!

Show your movies sharp and clear! Swing-out gate for fast, easy loading. 500 watt bulb. High intensity blower for cooling. Coated 3/4" f1.6 lens for wide angle viewing. Mares film system. Lifetime lubrication with oilite bearings. Separator Switches for blower and lamp. Reels have

400 ft. capacity. All aluminum die case construction. Rapid rewind and quick-tilt features for ease of operation. Includes lifetime guarantee. Shpg. wt., 10 lbs.  
 F-526 ..... 2.00 Down ..... Net 37.95

SPECIAL COMBINATION		<b>69.95</b>
Holiday M-1000 500 Watt Projector	Reg. 49.95	
Lafayette Triple Turret Electric Meter Camera	Reg. 39.50	
<b>Reg. Total</b>	<b>89.45</b>	
F-554	5.00 down, Shpg. wt. 13 lbs.	69.95



## "LAFAYETTE 40" DELUXE ELECTRIC CHORD ORGAN

- 34 FULL SIZE KEYS
- 40 CHORD BUTTONS
- VARIABLE TREMOLO CONTROL
- 5 SETS OF SWEDISH STEEL REEDS
- DECORATOR BRASS FINISHED LEGS

Anyone can play this resonant, mellow-toned, modern chord organ. Piano-type keyboard—34 adult size piano keys—nearly 3 octaves. 40 chord buttons. 8 major chords, 8 minor chords. 8 fundamental bass, 8 counter bass. 5 sets of hand-tuned, hand-finished Swedish stainless steel reeds. 3 sets for the basses—2 sets for the treble. These features plus a newly conceived specially designed chamber, constructed of aged and preselected hardwoods damped with felt and leather and completely soundproofed by means of a musical instrument shellac coating result in a true organ resonance. Brass trimmed cabinet is of 5 ply piano finished furniture hardwood, especially treated to resist heat and moisture. Easily moved by means of folding brass handles—one on each side. Size 26 3/4" L. x 11 3/4" W. x 9" H., less legs. Brass finished legs are 21" high. Complete with instructions, song book, 8 ft. cord and plug. For 110-120 Volts, 60 cycles AC. Shpg. wt., 20 lbs.  
 F-558 WX ..... 5.00 Down ..... Net 99.50

Regular ~~169.00~~  
**99.50**

FAMOUS ELAC VARIABLE RELUCTANCE STEREO CARTRIDGE PHENOMENAL VALUE!	
Lafayettes	Regular Price
Low, Low Price	<b>44.50</b>
Only	
<b>14.95</b>	
PK-446	Shpg. wt., 1 lb. Net 14.95

## 3-TRANSISTOR MINIATURIZED HEARING AID

HELP FOR THE HARD-OF-HEARING AT A PRICE TO SUIT ANY BUDGET!

Now you can enjoy radio and TV programs, chats with friends and neighbors, church, the movies—because this efficient three transistor hearing aid amplifies and improves the intelligibility of your world of sound.  
 • A convenient "on-off" switch and volume control permits adjustment to meet individual preferences and degrees of hearing impairment.  
 • This low, low price includes a miniature dynamic earphone fitted with two detachable rubber covered earplugs of different sizes (to insure individual fit and maximum wearing comfort) and a three foot cord of inconspicuous colorless plastic.  
 • A single, inexpensive "penlite" battery will operate this hearing aid for hours. Spare battery and zippered carrying case are supplied at no extra cost.  
 F-390 3 Transistor Hearing Aid — a \$50.00 value — now only Net 19.50  
 BA-155 Extra battery for Above Burgess Z or RCA VS034 Net .10 ea



**19.50**

## NEW! SUB-MINIATURE 4-TRANSISTOR HEARING AID

ONLY 2 1/2" LONG X 1 3/4" WIDE X 3/8" THICK

- LIGHTWEIGHT—WEIGHS LESS THAN 2 OZ. INCLUDING BATTERY
- SMALL ENOUGH TO BE CARRIED IN BREAST POCKET
- 4-POSITION TONE CONTROL
- UNIQUE TELEPHONE SWITCH ALLOWS TELEPHONE CONVERSATION
- LATEST ELECTRO-MAGNETIC EARPHONE AND MINIATURE CRYSTAL MICROPHONE
- UTILIZES ECONOMICAL PENLIGHT BATTERY

Lafayette's continued search of last has uncovered a hearing aid so small, so light, so powerful, as to make the owner and those around virtually unaware of its presence. Bound to open up a "new world" for those with even severe hearing loss. The extremely advanced circuit employs four high quality transistors, a special high performance crystal microphone along with 3 ft. thin plug-in colorless flexible cord and a unique magnetic earphone providing the clearest reception and sound reproduction yet achieved. All normal hearing functions are easily accomplished. A special slide switch allows use of the instrument with an ordinary telephone. Proper tonal quality for every situation is provided by means of a 4-position control. Extremely simple to work with on-off and volume operated by a single control. Economical to operate requires only one small standard 1.5 volt battery which will provide power for two months when used at the rate of 4 hours daily. Encased in a sturdy, attractive, gold finished aluminum case—absolutely no danger of rust or peeling. Supplied complete with attractive leather carrying case, earphone and battery Shpg. wt., 1 lb.  
 F-480 ..... Net 29.50



**29.50**

BATTERY FOR ABOVE  
 BA-153 (1 required) Burgess N type Shpg. wt., 3 oz. .08

## LAFAYETTE RADIO

165-08 LIBERTY AVENUE, JAMAICA 33, N. Y.

BULK RATE U. S. POSTAGE PAID  
 New York, N. Y.  
 Permit No. 8486



ALBERT C METS  
 840 EAST 56TH  
 SEATTLE 5 WASH

**GHJKL 67890**